

Edd (1915) Department.

Mis SERIES.


G.O. No. 198

DATED 23-2-15

[Despatch Abstract.]

Buildings.

Approving with
remarks his proposal to construct
departmentally at a cost of about
Rs 5000 a manual training
workshop attached to the Teachers'
College.

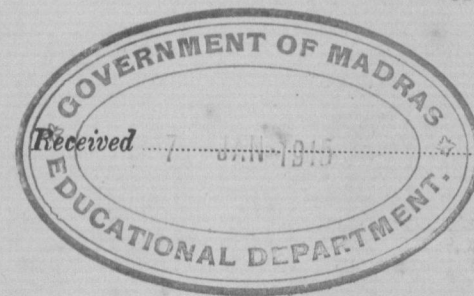

Submitting for the sanction of Government a plan and an estimate amounting to Rs. 5,600/- for the construction of a manual training workshop attached to the Teachers' College, Saidapet.

ENCLOSURES.

No.

Spare copies

Ref on Cur No. 9662 / 1914.

Station M a d r a s , Dated the 6th January 1915.

From (Name) The Hon. Mr. J. H. Stone, M.A., C.I.E., F.R.H.S.,
(Designation) Director of Public Instruction.

To The Secretary to the Government of Madras,
EDUCATIONAL Department.

Sir,

In submitting herewith a plan and an estimate amounting to Rs. 5,600/- for the construction of a manual training workshop attached to the Teachers' College, Saidapet, I have the honour to request that Government may be pleased to sanction the execution of the work departmentally under the supervision of Mr. Porrett, the Manual Training Instructor and to provide the necessary funds from the Public Works Budget. As regards the necessity for the work, I have to say that there is little use in having an Instructor without a building for him to work in. I may add that if funds can be transferred

5a

2/3
transferred from 45 Civil Works in the Public Works Budget and
sanction accorded without delay the building can be completed
within the current year.

I have the honour to be,

S i r,

Your most obedient servant,

G. H. S. S.

for Director of Public Instruction.

2/3

M. S. S.

SUBJECT.

Departmental construction of a
training workshop attached to the Thea
College, Saidapet.

From The D.P.D. no 9662, dated the 6th

Register No. 57 Edl.

The object of the D.P.D. in proposing
have the work executed departmentally
apparently to have the workshop constructed
urgently. Before however, approving it, it
submitted that the file may be sent
P.W.D. for remarks as to whether the rates
the estimate are reasonable, and whether
sanction may be accorded to the departmental
construction of the work and whether the
necessary funds can be found for the
work in the current year.

9.1.15 11.1.15

12.1.15

P. to S. Geo

P.W.

DS

The following are some of the

PUBLIC WORKS DEPARTMENT

C. NO. 159 W. K. S. B.

DATE, 16.1.1915.

15 JAN 1915
PUBLIC

Edl no 57-1
15.1.15

15-1-15

defects observed by the Chief Engineer in the a
Submitted by the D.P.I.:

(1) The roof trusses are not in proper
and are placed at irregular intervals. The la
Truss marked T in the tracing signed by Mr. Por
is at a distance of 12'-6" from the wall and
purlins 4"x6" provided for in the estimate
not strong enough. A King post truss will
do for a span of 26'-0". An iron rod for
the beam would be more satisfactory owing
the difficulty of securing sound timber of a length
28 feet.

(2) The door (6'x8') only one has been provided
and windows (6'x6') are not of proportionate
heights. No arches are shown over doors &
windows although they are provided for in the
estimate

(3) Dimensions are not properly given
in the drawing and the scale is not given.

(A) The nature of the soil is not known

As regards the rates provided in the estimate
the Chief Engineer considers that they are fair
However he recommends that the Govt. may acc
Administrative approval to the work, the plan
and estimate being passed on to the S.E.
Revision & technical sanction - ~~the~~
~~Engineer's recommendation may be approved~~
and the file ^{may be} returned to Educational for
issue of orders. They may be informed that

There is no objection to the work being done departmentally provided that the plan & are revised by the Suptg-Engineer. V Circle

See
4.2.15
B/S

Through B.F. with
refce to funds.

See
4.2.15
B/S


2/ The work is proposed to be done by the Educational Dept. As much as a work in charge of civil officers acting P.W. disburses. The question of funds this work will therefore have to be considered in financial. The case be returned to Educational through 2

LR
6/2/15
Aen
6/2

See
9.2.15

P. Wuo 159 WB
7.2.15

Find }
Edl } W.



(Recd in an ordinary
board. Since transferred
to an urgent board)

See
11.2.15.

P.T.O.

Financial dept
Estimate for the Construction of a
Manual Training Workshop attached
to the Teachers' College, Saidapet.
(Rs 5600) :-

page 1 CF

page 1 CF

cf P.W.D. note
 on page 3 ante

page 2 CF

The work will be carried out under the supervision of Mr. Porrett, the Manual Training Instructor and the charge is debitable to the head "45-civil works. P.W.D. - works in charge of civil officers acting as P.W. disbursers".
2. Please see the concluding portion of the letter from the Director of Public Instruction in which he anticipates that the building will be completed within the current year.

3. On receipt of the Educational dept's proceedings on this case, an order may issue in Financial sanctioning an additional allotment from the reserve with Financial.

Orle.

19.2.15.

MA-2 CF

The Director's letter is now over a month old and it will I think be impossible to complete the building within the next month and a half especially as the

At present the reserve is practically nil but some savings will be forthcoming within 2 or 3 days

Orle.

Para 1 of P.W.D. note
on pages 2-3 note

Plans and estimates have yet to be
revised by the S.E. I think the
Director may be asked to renew his
application for funds as soon as the
action suggested by P.W.D. has been
taken and all preliminaries for starting
the building have been settled.

ibid



C.S.

Approved
AW
13/2

To Educational

Amul no 941-1
13.2.15

Noted
15.2.15



A draft order is submitted for approval.
It may be sent to P.W.D. for acceptance.

15.2.15 16.2.15

19/2

Vol no 57-2
17.2.15

P.W.D. No

540

C. No. 540 W.K.S.

DATE 18.2.15



AS

The draft order may be accepted & the
file returned to Educational.

19/2/15
19.2.15

Accepted in P.W.D.

Educational no

20.2.15

P.W.D. 540 W.K.S.
20.2.15

14/5

Educational Department

Submitted that the draft may now
issue.

22/1/15

[Handwritten signature]

[Faint, mirrored handwritten text, likely bleed-through from the reverse side]

[Faint, mirrored handwritten text, likely bleed-through from the reverse side]

[Faint, mirrored handwritten text, likely bleed-through from the reverse side]

5/1/15

” ” ” ” ” 191

C. No. 57841, From the D.P. I, No. 9662, dated 6.1.1915

” ” ” ” ” ” ” ” 191

No. 19880 mis, dated 22 - 2 - 1915.

The Government approve the proposal to construct departmental ~~room~~ at a cost of about Rs 5,600, a manual training workshop attached to the Teacher's College, Saidapet. The plan and estimate for the work will be forwarded to the Superintending Engineer, V Circle, for revision and for technical sanction at a very early date.

2. The D.V.I. will be requested to renew his application for funds as soon as the ^{technical} ~~Sanctified~~ ^{been} received ~~and~~ and all the preliminaries for starting the building have been settled.

$\frac{16.2 \cdot 15}{16.2 \cdot 15}$

[- note

To the D. P. (with copy of note)
S. E. V Circle thro' P. W. D.
with plan and estimate
P. W. D. (with notes)
Financial Dept. (with notes)

Note by the Chief Engineer, P.W.D.

The roof trusses are not in proper shape and are placed at irregular intervals. The last truss marked T in the tracing signed by Mr. Borret is at a distance of 12' 6" from the wall and the purlins 4" x 6" provided for in the estimate are not strong enough. A king post truss will do for a span of 26' 0". An iron rod for the tie beam would be more satisfactory owing to the difficulty of securing sound timber of a length of 28 feet.

2. The door (6' x 8') and windows (6' x 6') are not of proportionate heights. Noarches are shown over doors and windows although they are provided for in the estimate.

3. Dimensions are not properly figured in the drawing and the scale is not marked.

4. The nature of the soil should be ascertained

[illegible]

When given for copying _____
 When copied _____
 When examined _____
 When signed _____

} 191

READ AGAIN G.O. No. 191, DATED

CURRENT No.

ENCLOSURES to C. No.

ORDER OF GOVERNMENT	..	..	..	A	A	A	A	A	A
---------------------	----	----	----	---	---	---	---	---	---

LETTER OF GOVERNMENT.

STATEMENT WITH BITTO.

PAPERS NOT FILED UP, BEING MEANT FOR DESPATCH
IN ORIGINAL.

N.B.—
A = Copy in full.
B = Not to be copied.
P = Copy abstract only.
Q = Copy heading only.