

MADRAS RECORD OFFICE.

Government of Madras.

Judicial DEPARTMENT.

G.O. No.	1422	Press
		~~Mis~~
21-24		
Dated	3.9.1863	~~10~~

11/12 (Chart)

Not to be folded or roughly handled

21 5 53
2001

~~1895~~ 2001
RM

1422

18

*Proceedings of the Madras Government, Judicial Department,
3rd September 1863.*

Read the following papers —

- No. 21. From M. J. WALHOUSE, Esq., Acting Magistrate of Trichinopoly; to A. J. ARBUTHNOT, Esq., Chief Secretary to Government, Fort Saint George, Judicial Department, dated Trichinopoly, 4th July 1863, No. 94.

The Cantonment Joint Magistrate of Trichinopoly holds his office in his own house for want of a public accommodation. None of the Government buildings situated within the limits of the Cantonment, belonging to the Revenue or Judicial Departments, are available; and my application to the Military authorities for a building was unsuccessful. I have therefore obtained the enclosed estimate from the District Engineer here, for constructing a building within the compound of the Cutcherry house. If circumstances admit

* Rupees 3,200.

of the proposed expenditure* being incurred at present, I should feel obliged by your obtaining

the necessary sanction of Government for the purpose. I would beg, at the same time, to propose that, pending the construction of a new building, a monthly allowance of 20 Rupees be granted to the Joint Magistrate for providing room for his office in his own house.

2. There is no suitable private building here which could be rented for the purpose.

- No. 22. From M. J. WALHOUSE, Esq., Acting Magistrate of Trichinopoly; to the Honorable A. J. ARBUTHNOT, Chief Secretary to Government, Fort Saint George, dated Voytullagudalur, 11th August 1863, No. 126.

With reference to your Memorandum of the 5th instant, No. 198, Judicial Department, I have the honor to state that there is no room in my office for accommodating the Cantonment Joint Magistrate and his establishment.

- No. 23. From M. J. WALHOUSE, Esq., Acting Magistrate of Trichinopoly; to the Honorable A. J. ARBUTHNOT, Chief Secretary to Government, Fort Saint George, dated Trichinopoly, 25th August 1863, No. 142.

1. With reference to your Memorandum of the 20th instant, No. 233, I have the honor to state that since the completion of the recent repairs in the Huzur Cutcherry, I find arrangements can be made without inconvenience to put two Departments into one large hall, and thus vacate a room which can be made use of, for the Joint Magistrate's Office.

2. At present Major Marsack holds his office in his own house, which is quite commodious enough, and more central in the Cantonment than the Cutcherry itself. I see no objection to his continuing to do so as long as he wishes. On any other arrangements becoming necessary, his office can at once be accommodated in the Huzur Cutcherry.

- No. 24. ORDER THEREON, 3rd September 1863, No. 1,422.

To be recorded.

(Signed) A. J. ARBUTHNOT,
Chief Secretary.

Civil Administration
Judicial.

Trichinopoly District
Trichinopoly Cantonment

25
New work

Report to accompany the Estimate for
Constructing a Cantonment Joint Magistrates
Office at Trichinopoly.

Amount of Estimate Rupees (3200)
Three thousand and two hundred only
Comprising the following Items.

7718.	Left of Brick work in mortar joints - 1-9 =	844-2-6.
20.	Columns small 1 1/2 ft Diameter 7 feet in height each 8-11-11 =	160-11-11
6557.	Sup ^{er} feet of Plastering with 1 coat of Chumam - 1-8-11 =	98-5-8
2342 1/2.	D ^o of Flooring with Wall Bricks low edge in Chumam - 1-4-11 =	93-11-4
1647.	D ^o of Main Roof with Palmyra rafters, couplets, collar pieces, Rafter, Wall Plates, Nails, Flat and Paw tiles and Chumam borders - 35-11-11 =	576-7-2
2652.	D ^o Verandah with Palmyra Rafters, Rafter, Nails, Flat & Paw tiles & Chumam borders - 27-11-11 =	716-11-8
240.	Running feet Country wood Brassum - 4-6-11 =	90-11-11
7.	Country wood Battens Doors with frames Iron works Complete - 22-11-11 =	154-11-11
	7 x 3 1/2	
	Carried over -	2732-11-4

Brought forward to 2732-11-4

1. Countrywood Battow Door with frame
Iron work complete 6 x 3 each 20-00 = 20-00
6. Oakwood Window 1/2 Venetian 1/2
glazed shutter frames wooden
Bars 1/2 complete 3 1/2 x 5 each 20-00 = 120-00
1. Countrywood Battow Window with
frames wooden Bars & Iron
work complete 3 1/2 x 5 each 15-00 = 15-00
1. Countrywood Battow Window with
frame Iron Bars 1/2 complete
for Record Room 3 1/2 x 5 each 27-00 = 27-00
1. Countrywood Battow Window with
frame wooden Bars & Iron
work complete 3 x 4 each 10-00 = 10-00
- 2 coats of Wood oil to Doors and
Windows 20-00
- Excavation 25-00
- Sundries & Contingencies 230-4-8
- Total Repairs 3200-00

2. The Building is to be raised on a basement one foot in height above foundations which are to be sunk 3 feet in hard gravel and Rocky Soil.

The principal Walls are to be 14 feet in height and the Verandah Pillars 7 feet.

The Building is to contain 3 Rooms
V

and one Verandah Room in Vignettes

1. Record Room 15 feet long by 20 ft. Broad interior dimensions
 1. Magistrate's Room 25 ft long by 20 ft. D°-D°
 1. Writer's Room - 15 ft long by 20 ft. D°-D°
- Surrounded by an open Verandah 9 feet deep part of which in rear of the record Room is to be enclosed to form a Room 15 feet long by 7 1/2 feet interior dimensions.

The foundations & Walls are to be built of best Bricks in Mortar and Plastered with 1 Coat of Chumam.

The flooring is to be paved with Wall Bricks on edge in Chumam & Plastered.

There are 20 Round Pillars for Verandahs allowed in the Estimate 1 1/2 feet Diameter & 7 feet in height to be built with best quadrant shaped Bricks in Mortar with circular Stone Slabs 3 inches thick placed at every 3 feet apart to prevent the Pillars splitting.

The Roof of the Building is to be constructed with Palmyrah Couples, Lollar Beams Rafters, Ropers, Nails, Flax and
Paw

Painters and Chumaw borders.

There are to be 7 Pairs of Country Wood Battan Doors with frames Iron works, Bolts, Padlocks Complete $7 \times 3\frac{1}{2}$ and One of 6×3 for Verandah Room.

There are 6 Oakwood Windows Half Venetian, Half glazed for Magistrates and Writers Room $3\frac{1}{2} \times 5$ each.

1. Country wood Battan Windows with Iron Bars $7\frac{1}{2}$ complete for Record Room $3\frac{1}{2} \times 5$.

1. Do Do with Wooden Bars for Verandah Room - 3×4 .

Archibald, Captain

Trichinopoly District Engineer's Office
Camp, Trichinopoly
23. June 1863.

District Engineer's
Trichinopoly.

Gables	40	$1\frac{1}{2}$	$13\frac{1}{2}$	210.
Verandah Room	33	$1\frac{1}{2}$	7.	$346\frac{1}{2}$
Gables	15	$1\frac{1}{2}$	3.	$67\frac{1}{2}$
Steps	20	1	$\frac{1}{2}$	10.

Deduct for Doors & Windows

Total cubic feet of Brick work in Mortar - 7718.

ms for Verandah	each	$1\frac{1}{2}$ feet diameter	7.	
Writers Room	70	$1\frac{1}{4}$	"	980.
1 Gable	20	$3\frac{1}{2}$	"	70.
Magistrates Room	90	$1\frac{1}{4}$	"	1260.
2 Gables	40	$3\frac{1}{2}$	"	140.
Carried Over				2450

Civil Administration
Judicial

TRICHINOPOLY DISTRICT.

New work

Detailed Estimate No. 9 of 1863-64.

Work.

Constructing a Cantonment Joint Magistrates Office
at Trichinopoly.

Particulars of Work.	Measurement in Feet and Inches.			Contents.
	Length.	Depth or Height.	Breadth or Thickness.	
Foundation to Main & end Walls	162	2½	3	1215
D ^o to 2 cross Walls	39	2½	3	292½
D ^o to Verandah Room	33	2½	3	247½
D ^o to 20 Verandah Pillars	50	2½	3	375
Basement to Main & end Walls	162	2	1	324
D ^o to cross Walls	39	2	1	78
D ^o to Verandah Room	33	2	1	66
D ^o to Verandah Pillars	40	2	1	80
Retaining Walls	182	2	2	728
Main Walls above	162	1½	13½	3280½
2 cross D ^o D ^o	40	1½	13½	810
Gables	40	1½	13½	210
Verandah Room	33	1½	7	346½
Gables	15	1½	3	67½
Steps	20	1	½	10
				8130½
Deduct for Doors & Windows				412½
Total cubic feet of Brick work in mortar				7718
20 Columns for Verandah — each 1½ feet diameter				
Plastering.				
Writers Room	70	14	"	980
1 Gable	20	3½	"	70
Magistrates Room	90	14	"	1260
2 Gables	40	3½	"	140
Carried Over				2450

Report to accompany
the Estimate for Constructing
a Cantonment Joint Magistrates
Office at Trichinopoly.

Rs. 3200/-

Trichinopoly

[illegible]

Civil Administration

Judicial

Work.

TRICHINOPOLY DISTRICT.

Abstract Estimate No. 9 of 1833-64.

New works. 78

Judicial

Abstract Estimate No. 9. of 1874.

Constructing a Cantonment Joint Magistrates Office at Trichinopoly.

	Rate.	Amount.	Amount of Each Part.
--	-------	---------	----------------------

Office at <i>Trichinopoly</i>		Rate.		Amount.		Amount of Each Part.	
Quantity.	Description of Work.	Rs.	A. P.	Rs.	A. P.	Rs.	A. P.
7718.	Lubricant of Brick work in Mortar - <i>per cft</i>	19		844	26		
20.	Columns Small 1 1/2 ft Diameter 7 ft in height each	8		160			
6557.	Supp. feet of Plastering with 1 coat of Chumam <i>per sq ft</i>	18		98	58		
2342 7/8.	D ^o of Flooring with Wall Bricks and edge in Chumam <i>per sq ft</i>	14		93	14		
1647.	D ^o of Main Roof with Palmyrah Coupler, Collar Piers, Rafter, Wall Plates, Nails, Flat & Saw Tiles and Chumam border <i>per sq ft</i>	35		576	72		
2652.	D ^o Krandah with Palmyrah Rafter, Rafter, Nails, Flat & Saw Tiles and Chumam border <i>per sq ft</i>	27		716	8		
240.	Running feet Countrywood Presummar <i>per Running feet</i>	6		90			
7.	Countrywood Battens Doors with frames Iron works complete 7 x 3 1/2 each	22		154			
1.	D ^o D ^o D ^o 6 x 3	20		20			
6.	Teakwood Windows 1/2 Venetian and 1/2 Japa shutter frames Wooden Bars <i>per</i> Complete - 3 1/2 x 5 each	20		120			
1.	Country wood Battens Windows with frames Wooden Bars and Iron works complete - 3 1/2 x 5 each	15		15			
	<i>Lo. A.</i>			2887	114		

Am. 3 Sept 1850

3 months

not to be
printed


Details and Matthews
Estimate for constructing a
cathedral with adjacent
Office at Washington

\$2,300.00


Wm. B. May Jr.
No. 1501

Trichinopoly District.


Plan Elevation and Sections of a Cantonment Joint-Magistrate's Office. proposed to be built at Trichinopoly.

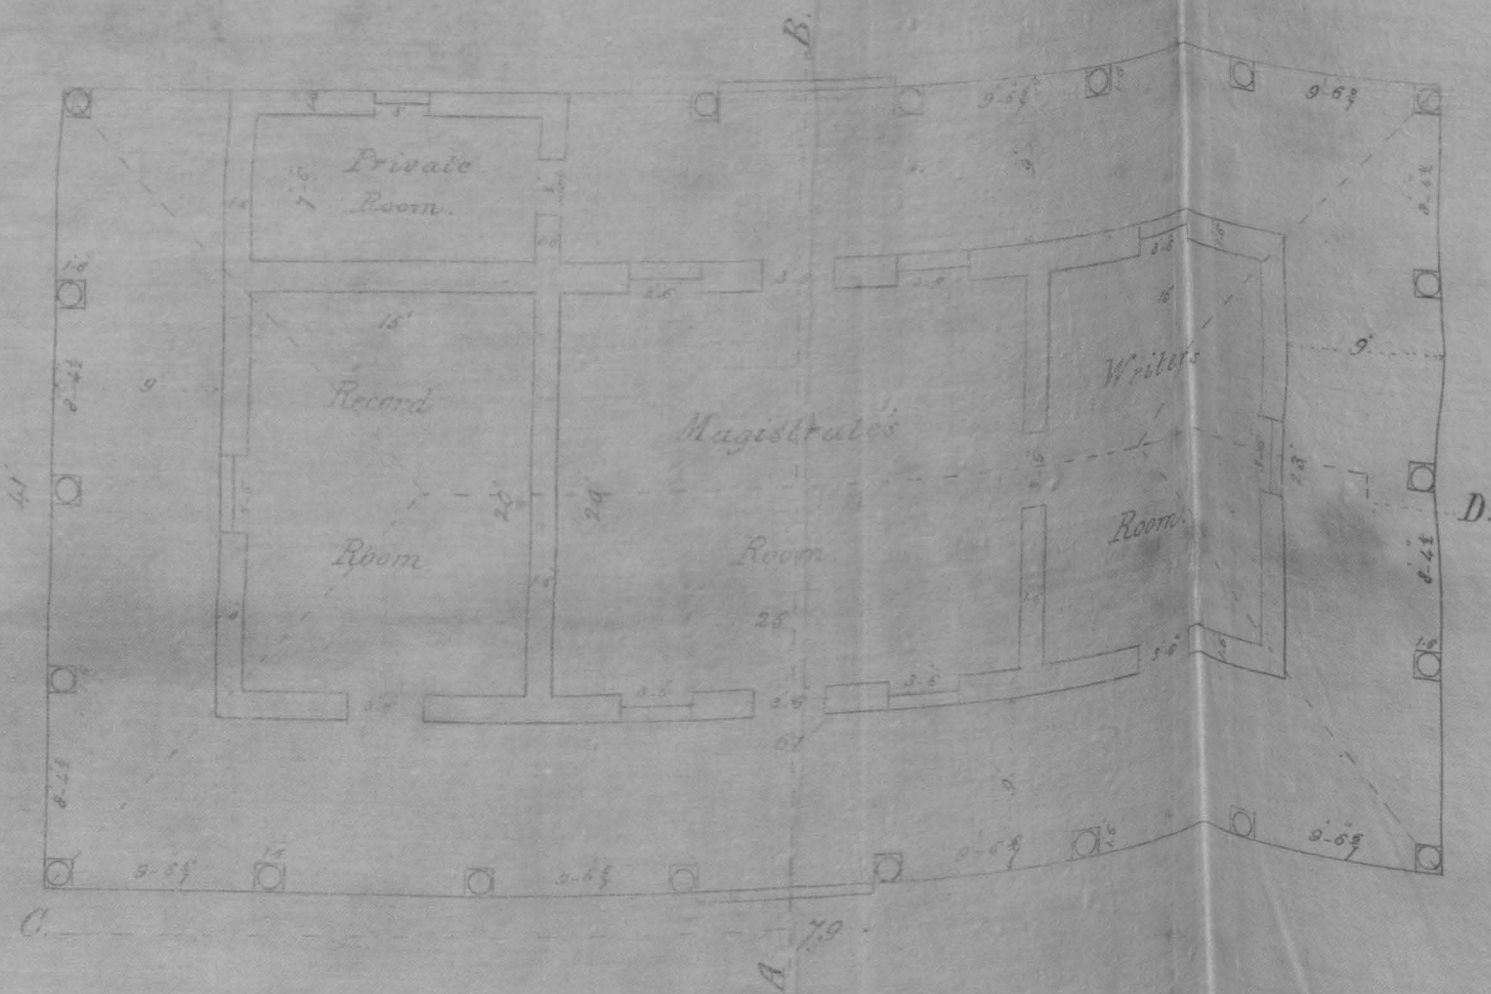

Section thro' A. B.

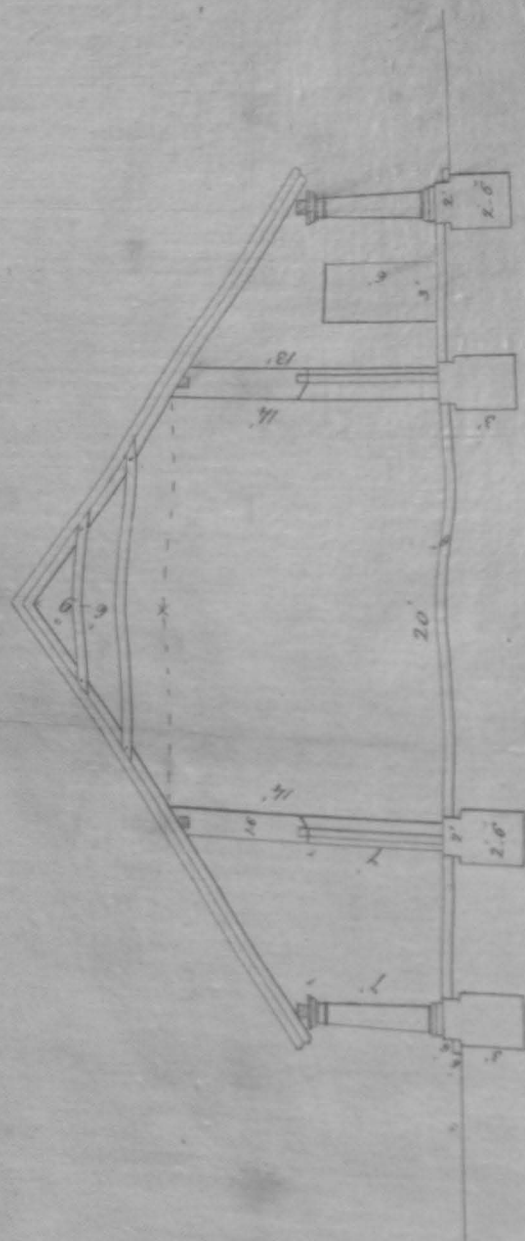


Elevation & Section thro' C. D.

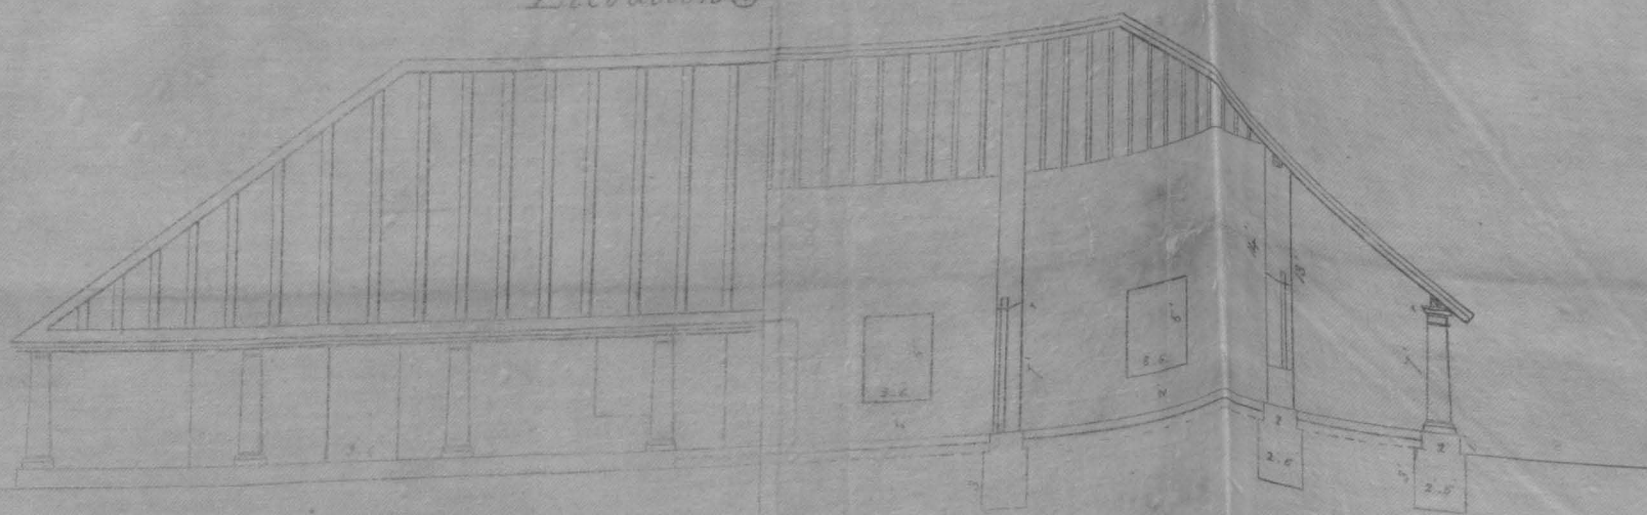

Soil. Gravel and Rock.
Foundation. Brick in Humam.
Amount of Estimate. Rupees 3,200

Scale 10 Feet to an Inch.



Trichinopoly
District Engineer's Office
Camp, Vaidhaly, Goodalors
22nd June 1883.

A. K. Kulkarni Captain
District Engineer

Judicial -

Proceedings of the Madras Govt.


Read letters from the
Magistrate of Sri-
Chinappoly

Enter 4th July 211th 225th

Aug. 63 N^o. 94, 126, 814

Order - 3rd September 1863 N^o. 1422

So be recorded.

by 

Sub. of 8. 1. 1. 1.

21024

1422

Pro. Le. for

Sub. of 8. 1. 1. 1.
1863. Department.

No. 1422

PROCEEDINGS OF GOVERNMENT,

Dated 3rd September 1863.

9678