21/5/03

~~1895~~ 2001
RM

M.R.O. 1—89,000—16-10-29.

MADRAS RECORD OFFICE.

Government of Madras.

Judicial DEPARTMENT.

G.O. No. 1422 Press ~~Mis.~~

21-24

Dated 3.9.1863 ~~1d~~.

11/12 (1 chart)

Not to be folded or roughly handled

Jr
1422

Proceedings of the Madras Government, Judicial Department, 3rd September 1863.

Read the following papers —

No. 21. From M. J. WALHOUSE, Esq., Acting Magistrate of Trichinopoly; to A. J. ARBUTHNOT, Esq., Chief Secretary to Government, Fort Saint George, Judicial Department, dated Trichinopoly, 4th July 1863, No. 94.

The Cantonment Joint Magistrate of Trichinopoly holds his office in his own house for want of a public accommodation. None of the Government buildings situated within the limits of the Cantonment, belonging to the Revenue or Judicial Departments, are available; and my appplication to the Military authorities for a building was unsuccessful. I have therefore obtained the enclosed estimate from the District Engineer here, for constructing a building within the compound of the Cutcherry house. If circumstances admit of the proposed expenditure* being incurred at present, I should feel obliged by your obtaining the necessary sanction of Government for the purpose. I would beg, at the same time, to propose that, pending the construction of a new building, a monthly allowance of 20 Rupees be granted to the Joint Magistrate for providing room for his office in his own house.

* Rupees 3,200.

2. There is no suitable private building here which could be rented for the purpose.

No. 22. From M. J. WALHOUSE, Esq., Acting Magistrate of Trichinopoly; to the Honorable A. J. ARBUTHNOT, Chief Secretary to Government, Fort Saint George, dated Voytullagudalur, 11th August 1863, No. 126.

With reference to your Memorandum of the 5th instant, No. 198, Judicial Department, I have the honor to state that there is no room in my office for accommodating the Cantonment Joint Magistrate and his establishment.

No. 23. From M. J. WALHOUSE, Esq., Acting Magistrate of Trichinopoly; to the Honorable A. J. ARBUTHNOT, Chief Secretary to Government, Fort Saint George, dated Trichinopoly, 25th August 1863, No. 142.

1. With reference to your Memorandum of the 20th instant, No. 233, I have the honor to state that since the completion of the recent repairs in the Huzur Cutcherry, I find arrangements can without inconvenience be made to put two Departments into one large hall, and thus vacate a room which can be made use of, for the Joint Magistrate's Office.

2. At present Major Marsack holds his office in his own house, which is quite commodious enough, and more central in the Cantonment than the Cutcherry itself. I see no objection to his continuing to do so as long as he wishes. On any other arrangements becoming necessary, his office can at once be accommodated in the Huzur Cutcherry.

No. 24. ORDER THEREON, 3rd September 1863, No. 1,422.

To be recorded.

(Signed) A. J. ARBUTHNOT,
Chief Secretary.

Exd. T. McMootry.

New work

Civil Administration
Judicial.-

Trichinopoly District
Trichinopoly Cantonment

Report to accompany the Estimate for Constructing a Cantonment Joint Magistrates Office at Trichinopoly.—

Amount of Estimate Rupees (3200)
Three Thousand and Two Hundred. only
Comprising the following Items.—

7718.	Cft. of Brick work in Mortar @ cft.	1-9 =	844-2-6.
20-	Columns small 1½ ft. Diameter 7 feet in height — each	8-0-0 =	160-0-0
6557.	Sup. feet of Plastering with 1 Coat of Chunam — @ Rupee	1-8-0 =	98-5-8.
2342⅞-	Do — of Flooring with Wall Bricks ow edge in Chunam — @ Rupee	4-0-0 =	93-11-4
1647.-	Do — of Main Roof with Palmyrah Couples Collar Pieces Rafters, Wall Plates, Nails, Flat and Paw Tiles and Chunam borders @ Rupee	35-0-0 =	576-7-2.
2652-	Do Verandah with Palmyrah Rafters, Rafters, Nails, Flat & Paw Tiles & Chunam borders @ Rupee	27-0-0 =	716.0-8.
240.	Running feet Country wood Brassummers — @ Rupee ft.	0-6-0 =	90-0-0
7-	Country wood Battew Doors with frames Iron works Complete — each 7 × 3½	22-0-0 =	154-0-0
		Carried over —	2732-11-4

Brought forward Dr —— 2732-11-4

1- Country wood Batten Door with Frame
Iron work Complete 6 x 3= each 20-"-" = 20-"-"
6 Teakwood Window ½ Venetian ½
Glazed Shutter frames wooden
Bars &c Complete 3½ x 5- each 20-"-" = 120-"-"
1- Country wood Batten Window with
Frames Wooden Bars & Iron
work Complete - 3½ x 5- each 15-"-" = 15-"-"
1- Country wood Batten Window with
Frame Iron Bars &c Complete
for Record Room 3½ x 5- each 27-"-" = 27-"-"
1- Country wood Batten Window with
Frame Wooden Bars & Iron
work complete 3 x 4- each 10-"-" = 10-"-"
2 Coats of Wood Oil to Doors and
Windows —— 20-"-"
Excavation —— 25-"-"
Sundries & Contingencies —— 230-4-8-
Total Rupees 3200-"-"

2. The Building is to be raised on a basement one foot in height above foundations which are to be sunk 3 feet in hard Gravel and Rocky Soil.-

The principal Walls are to be 14 feet in height and the Verandah Pillars 7 feet.-

The Building is to contain 3 Rooms

&

and one Verandah Room :- Viz.

1- Record Room 15 feet long by 20 ft. Broad Interior dimensions
1- Magistrates Room 25 ft long by 20 ft. Do — Do —
1- Writers Room - 15 ft long by 20 ft. Do — Do —

Surrounded by an open Verandah 9 feet deep part of which in Rear of the record Room is to be inclosed to form a Room 15 feet long by 7½ feet interior dimensions.-

The foundations & Walls are to be built of best Brick in Mortar and Plastered with 1 Coat of Chunam :-.

The flooring is to be paved with Pakka Bricks on edge in Chunam & Plastered.-

There are 20 Round Pillars for Verandahs allowed in the Estimate 1½ feet Diameter & 7 feet in height to be built in with best quadrant shaped Bricks in Mortar with Circular Stone Slabs 3 Inches thick placed at every 3 feet a part to prevent the Pillars Splitting :-

The Roof of the Building is to be Constructed with Palmyrah Couples Collar Beams Rafters, Battens, Nails, Flat and

Pan

Lantiles and Chunam borders.—

There are to be 7 Pairs of Country Wood Batten Doors with frames Iron works, Bolts, Padlocks Complete 7 × 3½ and One of 6 × 3. for Verandah Room.—

There are 6 Teakwood Windows Half Venatian, Half glazed for Magistrates and Writers Room 3½ × 5 each.—

1- Country wood Batten Windows with Iron Bars 9/16 complete for Record Room 3½ × 5.—

1. Do —— Do.— with Wooden Bars for Verandah Room - 3 × 4.—

Executed.

Captain
Superintending Engineer
Trichinopoly Dist.
23d. June 1863.

Gables —— " ——	40	1½	13½	210.
Verandah Room ——	33	1½	7.	346½
Gables ——	15	1½	3.	67½
Steps ——	20	1	½	10.
				8130½
Deduct for Doors & Windows ——				412½
Total Cubic feet of Brick work in Mortar —				7718.
ms for Verandah —— each	1½ feet diameter			7.
ng.				
Writers Room ——	70	14	"	980.
1 Gable ——	20	3½	"	70.
Magistrates Room ——	90	14	"	1260.
2 Gables ——	40	3½	"	140.
Carried Over ——				2450

Report to accompany the Estimate for Constructing a Cantonment Joint Magistrates Office at Trichinopoly

Rs 8200-0-0

Civil Administration
Judicial

TRICHINOPOLY DISTRICT.

New works 54

Detailed Estimate No. 9 of 1863-64.

Work. Constructing a Cantonment Joint Magistrates Office at Trichinopoly

Particulars of Work.	Measurement in Feet and Inches. Length.	Depth or Height.	Breadth or Thickness.	Contents.
Foundation to Main & End Walls	162	2½	3.	1215
Do to 2 Cross Walls	39.	2½	3	292½
Do to Verandah Room	33	2½	3.	247½
Do to 20 Verandah Pillars	50	2½	3.	375.
Basement to Main & End Walls	162	2	1.	324
Do to Cross Walls	39.	2	1.	78.
Do to Verandah Room	33	2	1.	66.
Do to Verandah Pillars	40	2	1.	80.
Retaining Walls	182	2	2	728
Main Walls above	162	1½	13½	3280½
2 Cross Do Do	40.	1½	13½	810.
Gables "	40	1½	13½	210.
Verandah Room	33	1½	7.	346½
Gables	15	1½	3.	67½
Pillars	20	1	½	10.
				8130½
Deduct for Doors & Windows				412½.
Total Cubic Feet of Brick work in Mortar				7718.
20. Columns for Verandah — each	1½ feet diameter	7'		
Plastering.				
Writers Room	70	14	"	980.
1 Gable	20	3½	"	70.
Magistrates Room	90	14	"	1260.
2 Gables	40	3½	"	140.
Carried Over				2450

	Measurement in Feet and Inches			Contents.
	Length.	Depth or Height.	Breadth or Thickness	
Brought forward				2450.
Record Room	70	14	"	980.
1 Gable	20	3½	"	70.
Verandah Room	45	7.	"	315
Gables	15	6	"	90
	15	3.	"	45.
Outside of the Building	150	13	"	1950
	36	7	"	252
	15	3.	"	45
Basement & Steps	240	1½	"	360.
Total Superficial feet of Plastering with 1 coat of clunam				6557.
Flooring				
Writers Room	14½	19½	"	282¾.
Magistrates Roow	24½	19½	"	477¾.
Record Roow.	14½	19½	"	282¾.
Verandah Roow	14½	7.	"	101½.
Verandah	177½	6¾	"	1198⅛.
Total Superficial Ft. of Paving Floor with on edge in mortar	Walls Brick			2342⅞
Main Roof with Palmyrah Couples, Collar Pieces rafters Wall plates, Nails, Flat & Paw Tiles & Clunam borders	61.	27	"	1647.
Roofing Verandah with Palmyrah Rafters Rafters Nails Flat & Paw tiles & Clunam borders.	204	13	"	2652
240. Running feet of Countrywood Bressummers	"	7"	5"	"
7. Countrywood Batten Doors with frames Iron works, Bolts & Padlocks Complete	"	7.	3½	"
1. Do. Do. Do.	"	6	3	"

	Measurement in Feet and Inches			Contents.
	Length.	Depth or Height	Breadth or Thickness.	
6. Teakwood Windows Half Venetian Half Glazed with frames & Iron works Complete for Magistrates & Writers Room	"	5	3½	"
1. Countrywood Battened Window with frames Iron Bars &c. Complete for Record Room	"	5	3½	"
1. Country Wood Batten Window with frame Wooden Bars &c. Complete for Verandah Room	"	4	3.	"

Preliminopoly Divn. Engineers Office
Camp. Vitalavi Godalur
23d June 1863.

Ex Py
Asst

Archd. Lt. Captain
District Engineer
Preliminopoly

Measurement in Feet and Inches			Contents.
Length.	Depth or Height.	Breadth or Thickness	

Civil Administration — Judicial — New works. 7x

TRICHINOPOLY DISTRICT.

Abstract Estimate No. 9. of 1863-64.

Work. Constructing a Cantonment Joint Magistrates Office at Trichinopoly...

Quantity.	Description of Work.	Rate. Rs.	A.	P.	Amount. Rs.	A.	P.	Amount of Each Part. Rs.	A.	P.
7718.	Cubic feet of Brick work in Mortar - Jn°cft°	.	1	9	844	2	6			
20.	Columns Small 1½ ft. Diameter 7 feet in height ——— each	8	..	..	160	..	..			
6557.	Sufft° feet of Plastering with 1 coat of Chunam ——— Jn°Sfe°	1	8	..	98	5	8			
2342 7/12	D° of Flooring with Wall Bricks on edge in Chunam ——— Jn° Sfe°	4	..	..	93	11	4			
1647.	D° of Main Roof with Palmyrah Couples, Collar Posts, Rafters, Wall Plates, Nails, Flat & Pan Tiles and Chunam borders ——— Jn°Sfe°	35	..	..	576	7	2			
2652.	D° Verandah with Palmyrah Rafters Rafters, Nails, Flat & Pan Tiles and Chunam borders ——— Jn°Sfe°	27	..	..	716	..	8			
240.	Running feet Countrywood Brassmmar Jn° Running feet	.	6	..	90	..	..			
7.	Countrywood Batten Doors with frames Iron works complete 7 × 3½ each	22	..	..	154	..	..			
1.	D° ——— D° ——— D° 6 × 3 .	20	..	..	20	..	..			
6.	Teakwood Window Jn Venetian and Jn Glaze Shutter frames Wooden Bars Iron Complete 3½ × 5' each	20	..	..	120	..	..			
1.	Country wood Batten Window with frames Wooden Bars and Iron works Complete 3½ × 5' each	15	..	..	15	..	..			
	C° O° ———				2,887	11	4			

Quantity.	Description of Work.	Rate.			Amount.			Amount of Each Part.		
		Rs.	A.	P.	Rs.	A.	P.	Rs.	A.	P.
	Brought forward									
1.	Country wood Batten Window with Frame Iron Bars complete for Record Room — 3½ × 5 each	27	..	..						
1.	Country wood Batten Window with frame wooden Bars & Iron works complete — 3 × 4 - each	10	..	..						
2.	Coat of Wood oil to Doors and Window									
	Excavation									
	Sundries & Contingencies									
	Total Estimate Rupees				3200	..	..			

Executive Engineer, Captain
District Engineer &
Superintendent

Superintendent Division
Engineer's Office
Camp. Vizagapatam
23rd June 1863.

Ex'd
D. Y. Act.

Quantity.	Description of Work.	Rate.			Amount.			Amount of Each Part.		
		Rs.	A.	P.	Rs.	A.	P.	Rs.	A.	P.

From 3d Sept/15 No 1422.

Details and Abstract Estimates for constructing a Cantonment Joint Magistrates Office at Trichinopoly


Rs. 3,200


Indd 11/13 Dt. 11 Rs. 1501

Trichinopoly District.


Plan Elevation and Sections of a Cantonment Joint Magistrate's Office

proposed to be built at Trichinopoly.

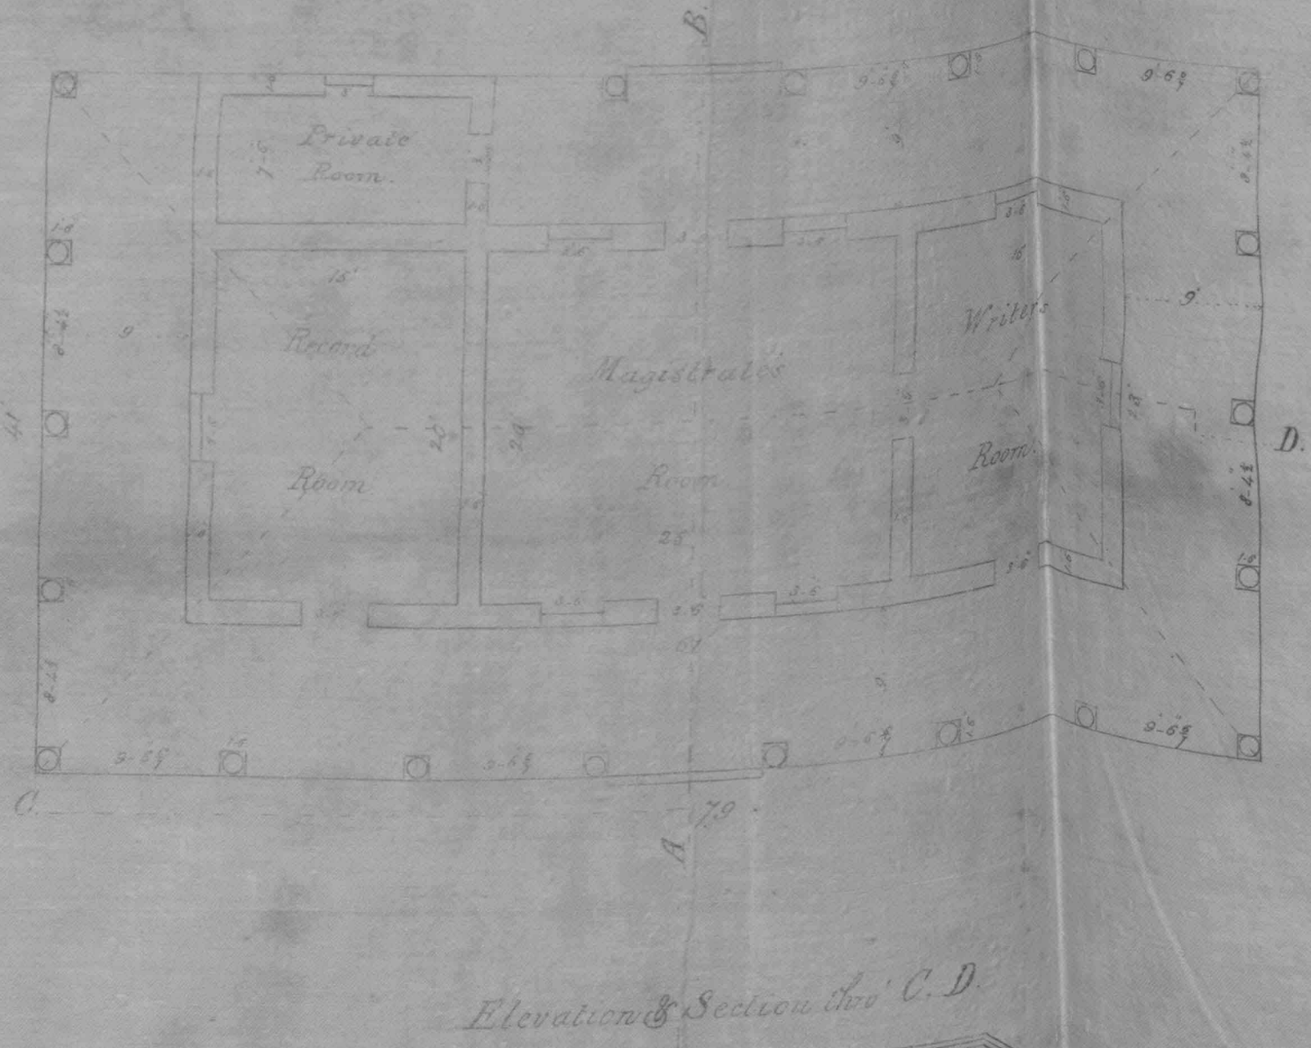

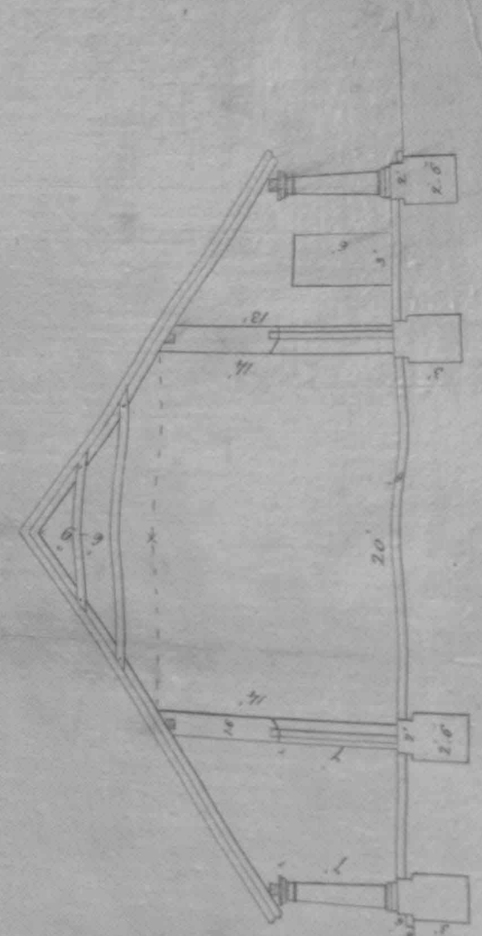

Elevation & Section thro' C. D.

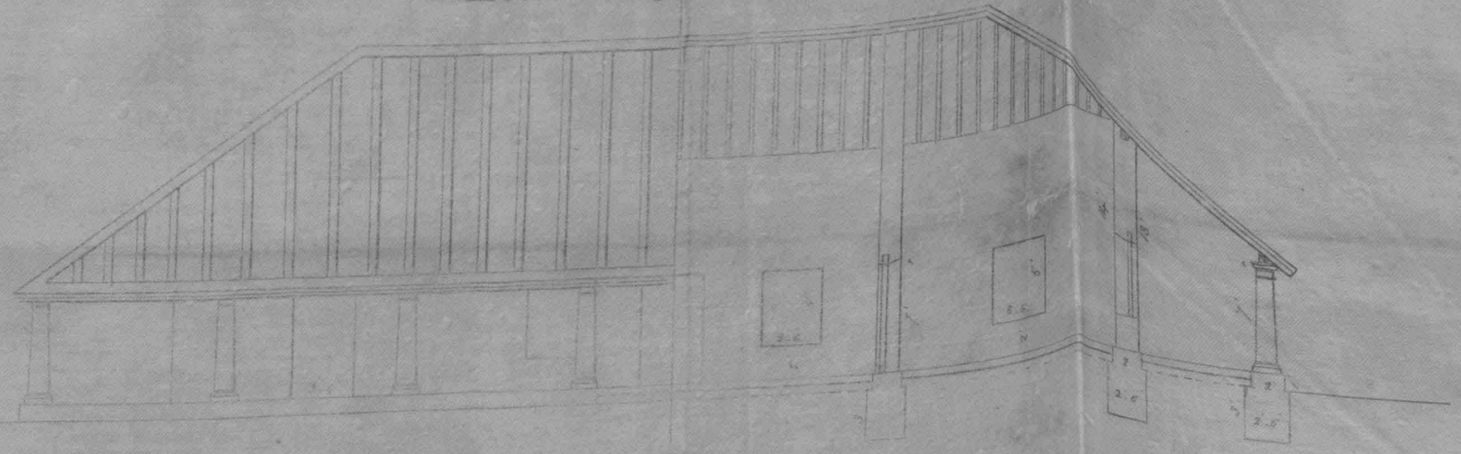

Soil. Gravel and Rock.
Foundation. Brick in Chunam.
Amount of Estimate, Rupees 3,200

Scale 10 Feet to an Inch.



Trichinopoly
District Engineer's Office
Camp, Po. Thalay, Godalore
22nd June 1853.

W. Kelsall Captain
District Engineer.

Judicial -

Proceedings of the Madras Govt.

Read letters from the
Magistrate of Tri-
chinopoly ——— Enter 4th July 2 11th 2 25th
Aug.t 63 No. 94, 120, 814.

Order — 3d September 1863 No. 1422

So be recorded.

1422

Pro. Letter

Level 1863. Department.

No. 1422

PROCEEDINGS OF GOVERNMENT,

Dated 3rd September 1863.

24 @ 24