

Judicial (1895) Department.

ORDINARY MS.

G.O., No. 822.

Dated 22nd Apr 1895.

INDEXED.

[Despatch Abstract.]

STATIONARY SUB-MAGISTRATE'S OFFICE.

Communicating to the Inspectors-General of Police and Prisons, Proceedings, Public Works Department, circulating to officers of the Public Works Department the type design for a--

and

BACK PAPERS.

G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.
	2094		30/8/94				

FURTHER PAPERS.

G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.
	5354		95				

For *Hon. Mr. Bliss*
C. No. *218*

MEMORANDUM.

REQUESTED for reference the under-mentioned papers:—

*The type design for a Stationary
Sub. Magistrates' Office issued
in connection with G. O. of 19-2-95
No. 427 W.*

CHIEF SECRETARIAT,
10th May 1895.

To

10-5
The Under Secretary
P. W. Deptt. *Under Secretary.*

ST. L. CHURCH NO. 372

St. No. 497 W 8 13.2.98

Draw: 15.5.90

No. 1838 8/17 May 1895

Supplied

City of Madras
under Sanction
No. 10

Cir

1/2 1/2 1/2

CHIEF SECRETARY
17 MAY 1895
GOVERNMENT OF MADRAS

Rev 13/4/98

APPENDIX.

STANDARD design for a Stationary Sub-Magistrate's office with terraced roofing according to drawing signed by the Consulting Architect to Government on 2nd November 1894.

DESCRIPTIVE SPECIFICATION.

Foundations.—A depth of 4½ feet is provided in the quantities, but this should be locally settled according to the nature of the soil.

Walling.—The walls will be carried up in English bond according to the various thicknesses shown on the drawing, 1½ and 2 bricks thick.

Stonework.—Stone slabs should be placed at the bearing of beams. The steps may also be of stone if procurable without great expense.

Woodwork.—The beams and joists to be of well-seasoned Burma teakwood or any other durable wood proof against white-ants.

Doors and Windows.—To be of well-seasoned Burma teakwood. All doors opening into verandah will be one-third panel and two-thirds venetians; inner doors to be pannelled throughout. The windows for the record and retiring rooms will have single venetianed shutters opening outside with fixed glass heads and ¾" square iron bars set diagonally. The ventilators will consist of a glazed shutter to open and shut on side pivots.

Cornice.—In place of the usual cornice, Cuddapah or any other similar slabs resting on brick corbels will be fixed throughout the building. The slabs to be well fitted and the joints neatly pointed with cement.

Roofing.—The roofing to consist of "pucca terracing," care being taken that proper slopes are made towards the weep-holes to be made about 2 feet apart in the parapet wall; the rain water will flow over the slabs and fall clear of the building.

Flooring.—The floor will consist of Cuddapah slabs about 2" thick laid on a 4" bed of concrete and neatly pointed with asphalt. If Cuddapah slabs are not easily procurable, the floor may be of square bricks on a bed of concrete, in which case the record room should be floored with asphalt; where the soil is damp the filling in below the floor should be of river sand. The floors of verandahs will be laid with a fall outwards of 1 inch to 4 feet.


Interior and exterior finishing.—The interior walls will be fine plastered and polished or plastered and whitewashed. Where good bricks or stone is obtainable, the exterior should be pointed. In damp soil the exterior plinth and walls inside rooms 3 feet above floor should be plastered with Portland cement. The beams and joists to be stained with three coats wood-oil and the doors and windows painted with three coats oak paint.

The different kinds of work to be done will be executed in conformity with the standard specification of the Public Works Department.

ESTIMATE FORM—Detail Measurements.


Detail of work.	Number.	Measurement in feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
1	2	3	4	5	6	7
<i>Excavation for foundations.</i>						
Court room walls	..	92 0				
Private room walls	..	40 6				
Clerks' do.	..	67 6				
Record do.	..	68 6				
Verandah walls	..	215 6				
		484 0	4 0	4 6	8,712	
Retiring room side walls	2	4 0	3 0	4 6	108	
Dais	1	16 4½	8 0	1 6	74	
Steps, front	1	19 0				
Do. rear	1	11 0				
Do. sides	2	11 6				
		53 6	3 0	0 6	80	
Total cubic feet of excavation for foundations	..	..	..	..	..	8,974

TYPE DESIGN FOR A STATIONARY SUB-MAGISTRATE'S OFFICE — TERRA

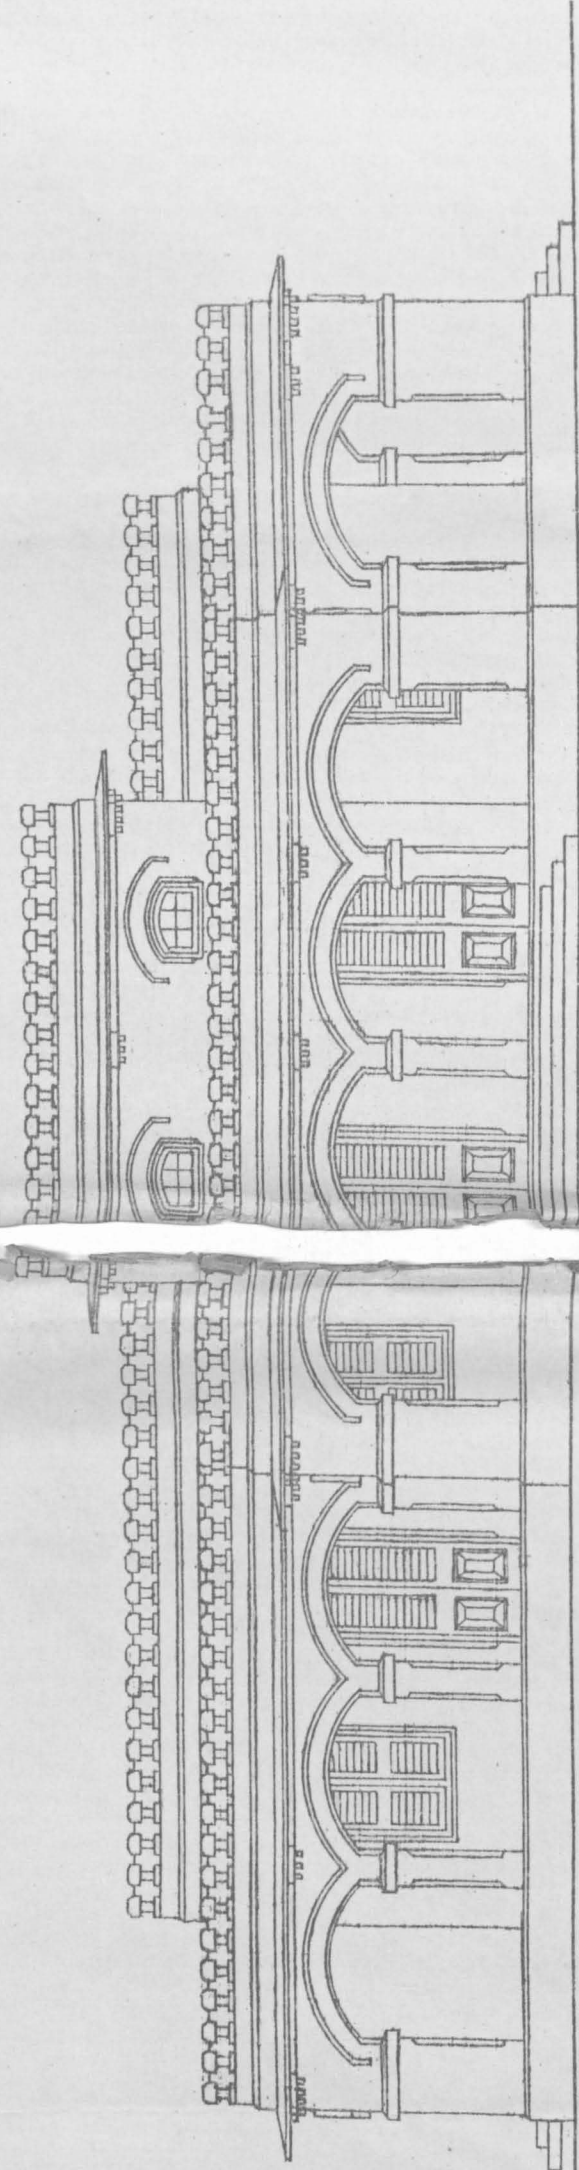


FRONT ELEVATION

DETAIL

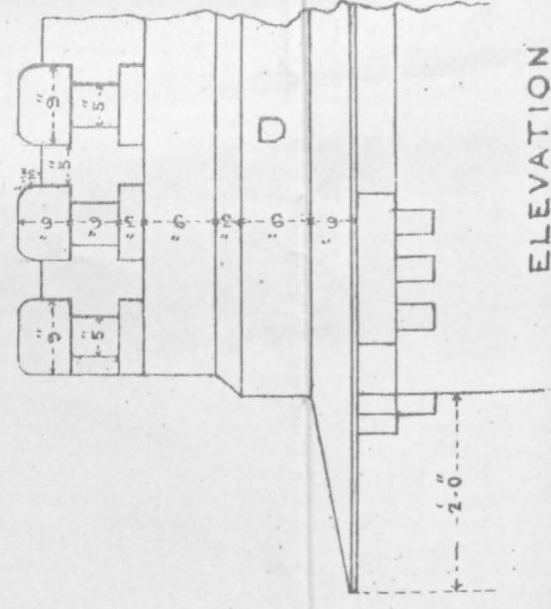

ELEVATION

Scale for enlarged detail

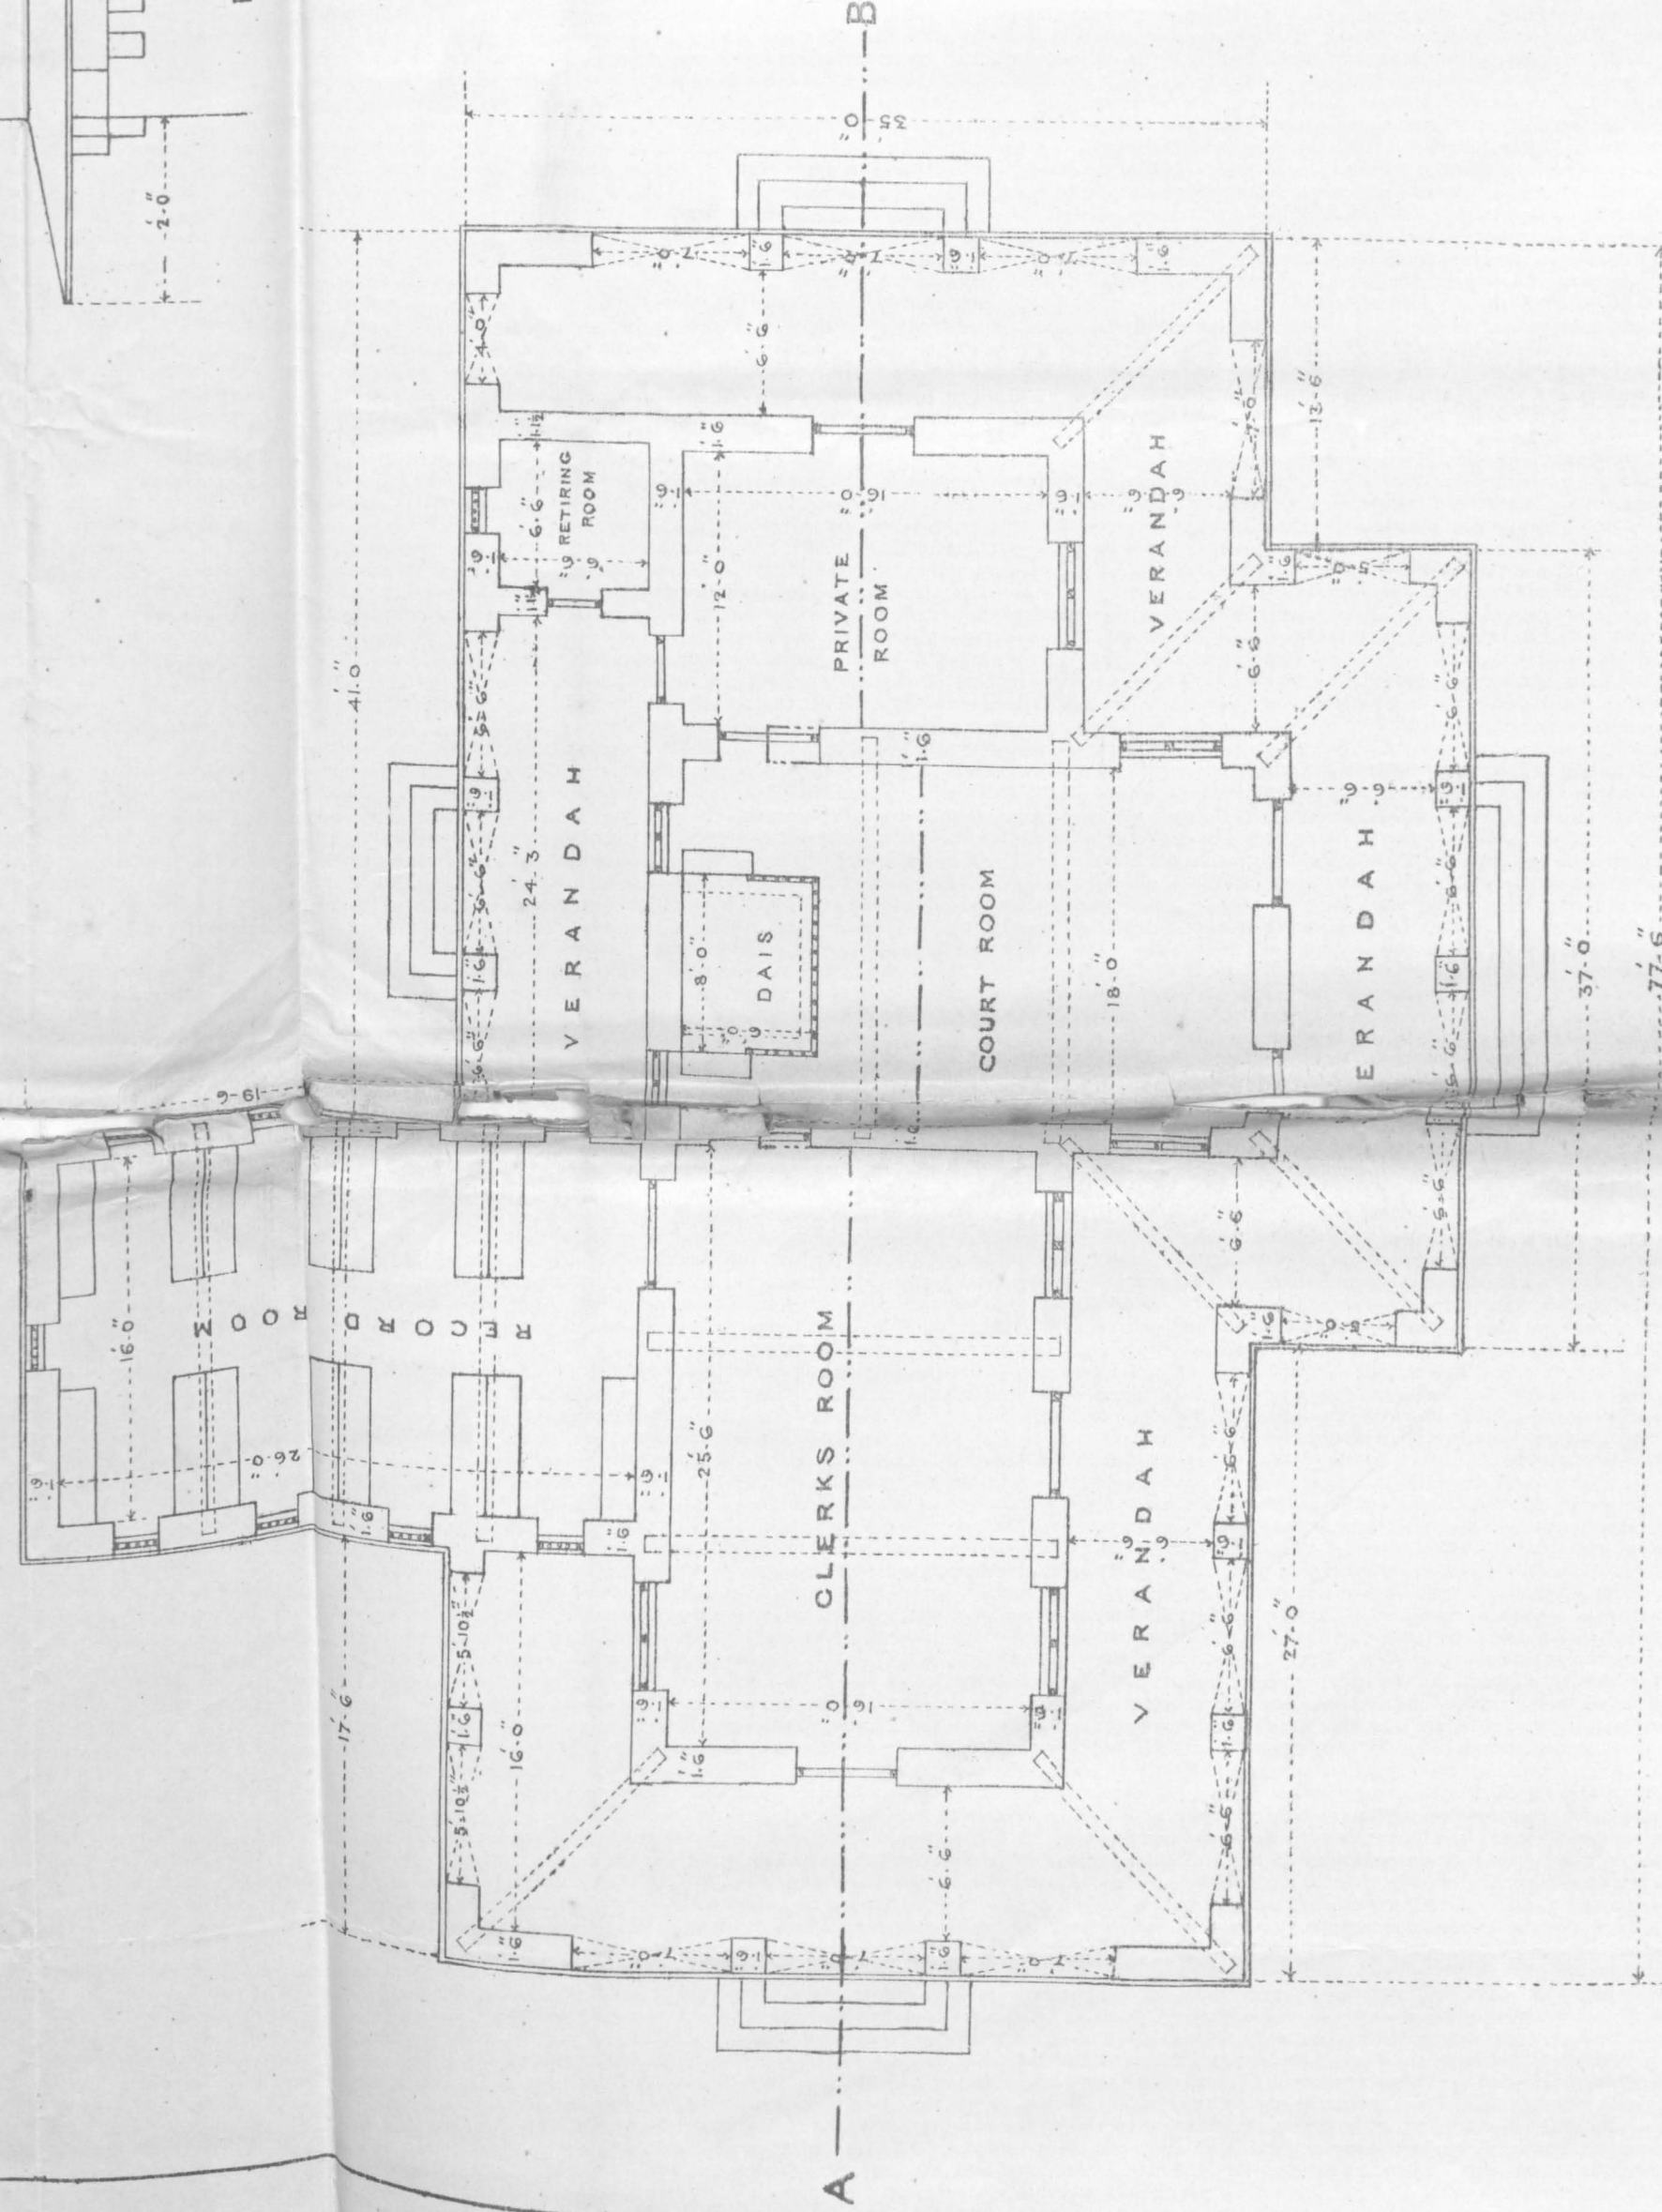

PLAN

W. L. M. S.
Supt. Technical Section,
Chief Engineer's Office P.W.D.

(Signed) Henry Irwin O.
Consulting Architect to
2nd Nov.

APPENDIX.

STANDARD design for a Stationary Sub-Magistrate's office with terraced roofing according to drawing signed by the Consulting Architect to Government on 2nd November 1894.

DESCRIPTIVE SPECIFICATION.

Foundations.—A depth of $4\frac{1}{2}$ feet is provided in the quantities, but this should be locally settled according to the nature of the soil.

Walling.—The walls will be carried up in English bond according to the various thicknesses shown on the drawing, $1\frac{1}{2}$ and 2 bricks thick.

Stonework.—Stone slabs should be placed at the bearing of beams. The steps may also be of stone if procurable without great expense.

Woodwork.—The beams and joists to be of well-seasoned Burma teakwood or any other durable wood proof against white-ants.

Doors and Windows.—To be of well-seasoned Burma teakwood. All doors opening into verandah will be one-third panel and two-thirds venetians; inner doors to be pannelled throughout. The windows for the record and retiring rooms will have single venetianed shutters opening outside with fixed glass heads and $\frac{3}{4}$ " square iron bars set diagonally. The ventilators will consist of a glazed shutter to open and shut on side pivots.

Cornice.—In place of the usual cornice, Cuddapah or any other similar slabs resting on brick corbels will be fixed throughout the building. The slabs to be well fitted and the joints neatly pointed with cement.

Roofing.—The roofing to consist of "pucca terracing," care being taken that proper slopes are made towards the weep-holes to be made about 2 feet apart in the parapet wall; the rain water will flow over the slabs and fall clear of the building.

Flooring.—The floor will consist of Cuddapah slabs about 2" thick laid on a 4" bed of concrete and neatly pointed with asphalte. If Cuddapah slabs are not easily procurable, the floor may be of square bricks on a bed of concrete, in which case the record room should be floored with asphalte; where the soil is damp the filling in below the floor should be of river sand. The floors of verandahs will be laid with a fall outwards of 1 inch to 4 feet.

Interior and exterior finishing.—The interior walls will be fine plastered and polished or plastered and whitewashed. Where good bricks or stone is obtainable, the exterior should be pointed. In damp soil the exterior plinth and walls inside rooms 3 feet above floor should be plastered with Portland cement. The beams and joists to be stained with three coats wood-oil and the doors and windows painted with three coats oak paint.

The different kinds of work to be done will be executed in conformity with the standard specification of the Public Works Department.

ESTIMATE FORM—Detail Measurements.

Detail of work.	Number.	Measurement in feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
1	2	3	4	5	6	7
<i>Excavation for foundations.</i>						
Court room walls	..	92 0				
Private room walls	..	40 6				
Clerks' do.	..	67 6				
Record do.	..	68 6				
Verandah walls	..	215 6				
		48 0	4 0	4 6	8,712	
Retiring room side walls	2	4 0	3 0	4 6	108	
Dais	1	16 4 1/2	8 0	1 6	74	
Steps, front	1	19 0				
Do. rear	1	11 0				
Do. sides	2	11 6				
		53 6	3 0	0 6	80	
Total cubic feet of excavation for foundations	..	..	..	..	..	8,974

Estimate Form—Detail Measurements—cont.

Detail of work.	Number.	Measurement in feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
1	2	3	4	5	6	7
<i>Concrete.</i>						
Walls as above	..	484 0	4 0	4 0	7,744	
Retiring room sides	2	4 0	3 0	4 0	96	
Walls of dais	1	16 4½	3 0	1 6	74	
Steps as above	..	53 6	3 0	0 6	80	
Total cubic feet	..	..	..	..	..	7,994
<i>Brickwork in foundations and basement.</i>						
Court room walls	..	92 0				
Private room walls	..	42 7½				
Clerks' do.	..	69 7½				
Record do.	..	70 7½				
Verandah walls	..	217 7½				
		492 6	1 10½	2 6	2,309	
Retiring room sides	2	6 1½	1 6	2 6	46	
Walls of dais	1	18 1½	1 1½	2 0	41	
Steps, front	1	18 6				
Do. rear	1	10 6				
Do. sides	2	11 0				
		51 0	3 0	0 6	77	
Steps, front	1	16 6				
Do. rear	1	8 6				
Do. sides	2	9 0				
		43 0	2 0	0 6	43	
Steps, front	1	14 6				
Do. rear	1	6 6				
Do. sides	2	7 0				
		35 0	1 0	0 6	18	
Total cubic feet of foundations and basement	..	..	..	..	..	2,534
<i>Brickwork in superstructure.</i>						
Court room walls	..	92 0	1 6	18 6	2,553	
Private do.	..	43 0				
Clerks' do.	..	70 0				
		113 0	1 6	14 0	2,373	
Record room walls	..	71 0				
Verandah do.	..	218 0				
		289 0	1 6	11 0	4,769	
Retiring room side walls	2	6 6	1 1½	11 0	161	
Dais walls	..	18 6	0 9	1 0	14	
Dais steps	2	3 0	1 0	0 6	3	
Total cubic feet	..	..	..	..	..	9,873
<i>Deductions—</i>						
Verandah openings	7	7 0	1 6	7 3	533	
Do.	10	6 6	1 6	7 3	707	
Do.	2	5 10½	1 6	7 3	128	
Do.	2	5 0	1 6	7 3	109	
Do.	1	4 0	1 6	7 3	44	
Doors	8	4 6	1 6	8 6	459	
Do. private room	1	3 0	1 6	8 6	38	
Do. retiring room	1	2 6	1 1½	7 0	20	
Windows	6	4 6	1 6	5 9	233	
Do. for recess	6	4 6	0 4½	2 9	28	
Do. court room	2	3 0	1 6	5 9	52	
Do. for recess	2	3 0	0 4½	2 9	6	
Do. in record and retiring room	10	2 0	1 6	4 6	135	
Do. recess	10	2 0	0 4½	2 9	21	
Ventilators in court room	6	3 0	1 6	1 9	47	
Archwork as per details	..	..	..	..	574	
Total deduction cubic feet	..	..	..	..	..	3,134
Total cubic feet of superstructure	..	..	..	..	..	6,739

Estimate Form—Detail Measurements—cont.

Detail of work.	Number.	Measurements in feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
1	2	3	4	5	6	7
<i>Brickwork in parapets, cornice, &c.</i>						
Parapet over court	..	90 6				
Do. clerks room	..	69 3				
Do. private room	..	42 3				
Do. verandah and record-room	..	273 9				
		475 9	1 1½	2 3	1,204	
<i>Cornice under Cuddapah slabs—</i>						
Court room	..	99 6				
Clerks' room	..	73 9				
Private do.	..	46 9				
Verandah and record room	..	285 0				
		505 0	0 4½	1 0	189	
Brackets in cornice	76	1 0	0 4½	1 0	29	
String course at head of piers, &c.	..	205 0	0 3	0 9	38	
Cornice over arches, windows, &c.	..	242 0	0 3	0 3	15	
Total cubic feet of parapets, cornice, &c.	..	..	..	..	..	1,475
<i>Archwork, segmental.</i>						
Verandah arches	7	9 0				
Do.	10	8 3				
Do.	2	7 9				
Do.	2	7 0				
Do.	1	6 0				
		181 0	1 6	1 1½	305	
Over doors and windows	14	6 0				
Do. do.	3	4 6				
Over windows	10	3 3				
Over ventilators	6	4 6				
		157 0	1 6	1 1½	265	
Over retiring room door	1	3 6	1 1½	1 1½	4	
Total cubic feet	..	..	..	..	..	574
<i>Stone work.</i>						
Stone slabs under beams	14	2 0	1 6	0 6	21	
Total cubic feet of stone slabs	..	..	..	..	..	21
<i>Earth filling in basement—</i>						
Court room	..	24 7½	17 7½	1 6	651	
Clerks' room	..	25 1½				
Private room	..	11 7½	15 7½	1 6	1,459	
Record room	..	25 7½				
Verandahs and retiring room	..	182 7½	6 1½	1 6	1,678	
Dais	1	6 6	5 0	1 0	33	
Total cubic feet	..	..	..	..	..	3,821
<i>Teakwood, wrought, and put up.</i>						
Court room—						
Beams	2	20 6	0 10	1 4	46	
Joists, centre, bay	13	9 0	0 3	0 5	37	
Do. end, bay	26	9 3				
Clerks' room—						
Beams	2	18 6	0 9	1 2	32	
Joists, centre, bay	12	9 1½	0 3	0 5	35	
Do. end, bay	24	9 3½				
Private room—						
Joists	12	13 6	0 3	0 8	27	
Record room—						
Beams	3	18 6	0 7½	1 2	40	
Joists	48	7 0	0 3	0 4½	32	
Verandah—						
Angle beams	7	12 0	0 6	0 7	25	
Joists including retiring room	92	8 0	0 3	0 4½	69	
Do. at angles	14	7 6				
Do. do.	14	6 0				
Do. do.	14	4 6	0 3	0 4½	28	
Do. do.	14	3 0				
Total cubic feet	..	..	..	..	..	371

Estimate Form—Detail Measurements—cont.

Detail of work.	Number.	Measurements in feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
1	2	3	4	5	6	7
<i>Teakwood, wrought, and put up—cont.</i>						
Record racks (6' x 2' 3" x 9' 11")—						
Uprights	6	9 11	0 3	0 3	4	
Horizontal pieces	28	2 10 $\frac{1}{2}$	0 2	0 3	3	
Ends and cross pieces	21	2 3	0 2	0 3	2	
Horizontal pieces for shelves	42	2 10 $\frac{1}{2}$	0 3	0 1	3	
Total for one rack					12	
Total for six racks						72
Record racks (6' x 1' 3" x 9' 11")—						
Uprights	6	9 11	0 3	0 3	4	
Horizontal pieces	28	2 10 $\frac{1}{2}$	0 2	0 3	3	
Ends and cross pieces	21	1 0	0 2	0 3	1	
Horizontal pieces for shelves	14	2 10 $\frac{1}{2}$	0 3	0 1	1	
Total for one rack					9	
Total for three racks						27
Total cubic feet of teakwood work for record racks.						99
<i>Venetian and panel doors.</i>						
Doors opening into verandahs	5	3 11		7 11	155	
Do. in private room	1	2 6		8 0	20	
Total square feet						175
<i>Panelled doors.</i>						
Inner doors	3	3 11		7 11	92	
Door in retiring room	1	2 0		6 6	13	
Total square feet						106
<i>Venetian windows.</i>						
Windows outer	6	4 0		5 3	126	
Do. rear of court	2	2 6		5 3	26	
Total square feet						252
<i>Venetian windows with glazed tops and $\frac{3}{4}$ inch square iron bars.</i>						
Record and retiring room	10	1 9 $\frac{1}{2}$		4 1	73	
Total square feet						73
Ventilators with glazed shutters moving on side pivots	6	2 6		1 9	26	
Total square feet						26
Cuddapah slabs cornice		517		3 0	1,551	
Total square feet						1,551
<i>Terrace roofing.</i>						
Court room	1	26 0	19 0		494	
Clerks' room	1	26 6	17 0		451	
Private room	1	13 0	17 0		221	
Record room	1	27 0	17 0		459	
Verandahs and retiring room		187 9	7 6		1,408	
Total square feet						3,033
<i>Flooring with Cuddapah slabs on a 4 inches bed of concrete.</i>						
Court room		25 0	18 0		450	
Clerks' room		25 6				
Private room		12 0	16 0		1,016	
Record room		26 0				
Retiring room		6 6	6 6		42	
Verandahs		177 3	6 6		1,152	
Door pieces	8	4 6	1 1		42	
Do.	1	3 0	1 1		2	
Do.	1	2 6	0 8 $\frac{1}{2}$			
Window pieces	6	4 6				
Do.	2	3 0	0 4 $\frac{1}{2}$		20	
Do.	10	2 0				
Do.	7	7 0				
Verandah openings	10	6 6	1 6		210	
Do.	2	5 10 $\frac{1}{2}$				
Do.	3	5 0				
Do.	1	4 0				
Total square feet						2,934

Note.—Doors and windows taken out in accordance with Appendix G—standard specification.

Estimate Form—Detail Measurements—cont.

Detail of work.	Number.	Measurements in feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
1	2	3	4	5	6	7
<i>Plastering, interior.</i>						
Court room		86 0		17 6	1,505	
Clerks' room		83 0		13 0	1,807	
Private room		56 0				
Record room		84 0		10 0	1,100	
Retiring room		26 0				
Door jambs and soffits	8	22 0		1 1	213	
Do. do.	1	20 6				
Do. do.	1	17 0		0 9	13	
Window jambs and soffits	6	16 6		1 1	265	
Do. do.	2	15 0				
Do. do.	10	11 6				
Window sills	6	4 6		0 7 $\frac{1}{2}$	33	
Do.	2	3 0				
Do.	10	2 0				
Windows, sides of recesses	36	0 4 $\frac{1}{2}$		2 9	37	
Ventilators sides, soffits and cills	6	9 6		1 1	62	
Interior of parapet		463 0		2 6	1,158	
Total square feet						6,193
<i>Deductions—</i>						
Doors	11	4 6		8 6	446	
Do.	1	3 0				
Do.	1	2 6		7 0	18	
Windows	6	4 6		5 9	190	
Do.	2	3 0				
Do.	10	2 0		4 6	90	
Ventilators	6	3 0		1 9	32	
Total deductions square feet						776
Total plastering square feet						5,417
<i>Pointing, exterior.</i>						
Plinth		283 6		2 3	638	
Steps, sides	8	2 0		1 6	24	
Verandah and record room, exterior walls including parapet		282 0		13 0	3,666	
Interior of verandahs		380 6		10 0	3,805	
Clear storey over court (front and rear) including parapet		60 0		10 6	630	
Clear storey over court at (sides) including parapet	2	19 0		7 6	285	
Clear storey over clerks' room including parapet		73 0		6 0	438	
Clear storey private room including parapet		46 0		6 0	276	
Jambs and soffits of verandah openings	7	21 0				
Do. do.	10	20 6				
Do. do.	2	20 0		1 6	675	
Do. do.	2	19 6				
Do. do.	1	19 0				
Total square feet						10,437
<i>Deductions—</i>						
Verandah openings	14	7 0				
Do.	20	6 6				
Do.	4	5 10 $\frac{1}{2}$		7 3	2,026	
Do.	4	5 0				
Do.	2	4 0				
Do.	5	4 6		8 6		
Doorways	1	3 0		8 6	217	
Do.	1	2 6		7 0	18	
Windows	6	4 6		5 9	190	
Do.	2	3 0				
Do.	10	2 0		4 6	90	
Ventilators	6	3 0		1 9	32	
Total deductions square feet						2,573
Total pointing square feet						7,864
<i>Painting doors and windows with 3 coats oak paint.</i>						
Venetian and panel doors	5	4 6		8 6	574	
Do.	1	3 0		8 6	51	
Panel doors	3	4 6		8 6	230	
Do.	1	2 6		7 0	35	
Venetian windows	6	4 6		5 9	466	
Do.	2	3 0		5 9	104	
Do.	10	2 0		4 6	270	
Ventilators	6	3 0		2 0	86	
Total painting square feet						1,766

Estimate Form--Detail Measurements--cont.

Detail of work.	Number.	Measurements in feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
1	2	3	4	5	6	7
<i>Wood-oiling roof timbers.</i>						
Court room—						
Beams	2	18 0	..	3 6	126	
Joists	13	25 0	..	1 1	352	
Clerks' room—						
Beams	2	16 0	..	3 1	99	
Joists	12	25 6	..	1 1	332	
Private room—						
Joists	12	12 0	..	1 7	228	
Record room—						
Beams	3	16 0	..	2 11 1/2	142	
Joists	12	26 0	..	1 0	312	
Verandah angle—						
Beams	7	9 6	..	1 8	111	
Joists	92	6 6	..	1 0	598	
Do. at angles ..	56	5 3	..	1 0	294	
Total square feet for main building ..						2,594
Record racks (6' 0" x 2' 6" x 9' 11")—						
Uprights	6	10 0	..	1 0	60	
Horizontal pieces ..	28	2 9	..	0 10	64	
Ends and cross pieces ..	21	2 0	..	0 10	35	
Horizontal pieces for shelves ..	42	2 9	..	0 8	77	
Total for one rack ..					236	
Total for six racks ..						1,416
Record racks (6' 0" x 1' 3" x 9' 11")—						
Uprights	6	10 0	..	1 0	60	
Horizontal pieces ..	28	2 9	..	0 10	64	
Ends and cross pieces ..	21	0 9	..	0 10	13	
Horizontal pieces for shelves ..	14	2 9	..	0 8	27	
Total for one rack ..					164	
Total for three racks ..						492
Total square feet of wood-oiling, three coats ..						4,502
Dais railing					14	Lineal feet.
<i>Punkahs.</i>						
Court room	1	10 0	..	..		
Private room	1	6 0	..	..	16	Lineal feet.
Wooden movable ladder ..					1	

Estimate Form--Abstract.

Quantity.	Description of work.	Rate.	Per.	Amount.	Total.
1	2	3	4	5	6
		RS. A. P.		RS.	RS.
8,974 c. ft.	Excavation for foundations ..	4 10 0	1,000 c. ft.	41	..
7,994 "	Concrete in foundations with broken clinker bricks ..	14 0 0	100 "	1,119	..
2,534 "	Brickwork in foundations and basement with stock bricks ..	20 0 0	..	507	..
6,739 "	Brickwork in superstructure with stock bricks ..	22 0 0	..	1,483	..
1,475 "	Brickwork in parapets, cornice, &c., ..	24 0 0	..	354	..
574 "	Archwork	25 0 0	..	144	..
21 "	Stone slabs dressed under beams ..	2 0 0	Cubic foot.	42	..
3,821 "	Earthfilling in basement ..	3 0 0	1,000 c. ft.	11	..
371 "	Teakwood, wrought, and put up ..	3 8 0	Cubic foot.	1,299	..
99 "	Do. for record racks ..	4 0 0	..	396	..

Estimate Form--Abstract--cont.

Quantity.	Description of work.	Rate.	Per.	Amount.	Total.
1	2	3	4	5	6
		RS. A. P.		RS.	RS.
175 sq. ft.	Venetian and panel doors with iron fittings ..	1 1 0	Sq. foot.	186	..
106 "	Panel doors	0 14 0	..	93	..
252 "	Venetian windows	1 1 0	..	268	..
78 "	Do. with iron bars	1 12 0	..	128	..
26 "	Ventilators with glazed shutters ..	1 0 0	..	26	..
1,551 "	Cuddapah slabs for cornice including fixing, complete ..	25 0 0	100 sq. ft.	388	..
3,033 "	Terrace roofing with brick on edge 3" concrete and 3 courses of flat tiles plastered and polished on top and ceiling ..	25 0 0	..	758	..
2,934 "	Flooring with Cuddapah slabs 2" thick on a 4" bed of concrete pointed with tar and asphalte ..	22 0 0	..	645	..
5,417 sq. ft.	Plastering interior with chunam, 2 coats, polished ..	2 8 0	..	135	..
7,864 "	Pointing exterior black with tar and asphalte ..	3 0 0	..	236	..
1,766 "	Painting doors and windows with 3 coats oak paint ..	2 5 0	..	41	..
4,502 "	Wood-oiling roof timbers, 3 coats ..	0 15 0	..	42	..
14 L. ft.	Wooden railing for dais including fixing and varnishing, complete ..	1 8 0	L. foot	21	..
16 "	Punkahs, complete, including wheel, &c. ..	1 8 0	..	24	..
1 "	Wooden movable ladder	16 0 0	each	16	..
	Total				8,385
	Petty supervision	2 8 0	cent.	..	210
	Contingencies	5 0 0	cent.	..	420
	Grand total of estimate				9,015

19TH FEBRUARY 1895, No. 427 W., PUBLIC WORKS.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following papers:—

From H. IRWIN, Esq., C.I.E., Consulting Architect to the Government of Madras, to the Chief Engineer, Public Works Department, dated Chépák, 3rd November 1894, No. 2301.

With reference to G.O., No. 1937 W., dated the 4th August 1894, I have the honour to submit a standard design with schedule of quantities for a Stationary Sub-Magistrate's office with terraced roofing. The plan has been approved by the Board of Revenue.

2. The design with tiled roofing is under preparation.

G.O., dated 15th December 1894, Mis. No. 4941, Revenue.

Read—endorsement of the Public Works Department, dated 28th November 1894, No. 3811 C.

Order—dated 15th December 1894, Mis. No. 4941, Revenue.

The standard design for a Stationary Sub-Magistrate's office is approved.

(True Extract.)

(Signed) R. C. C. CARR,
Under Secretary to Government.

ORDER—dated 19th February 1895, No. 427 W., Public Works.

The type design, with schedule of quantities, for a Stationary Sub-Magistrate's office with terraced roofing is circulated to officers of the Public Works Department.

(True Extract.)

C. A. Munisawmy

Under Secy. to Govt., P.W.D.

To all Superintending Engineers.
„ the Consulting Architect to Government.
„ the Revenue Department.
„ the Judicial „

Exd. C. A. Munisawmy.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1895} Madras.
PUBLIC WORKS.

Dated February, 19th.

Recd. 11.4.95
Re 20 12/14

Encl.

G.O., 19th Feb. 1895, No. 427 W.

SECRET
11. APR. 1895
GOVERNMENT OF MADRAS

FEBRUARY.

Stationary Sub-Magistrate's
Office

The type design for a — with terraced
roofing, circulated to officers of the Public
Works Department.

2094-30-8-94
2094.30-8-94 mis.

Order 22 April 1895, No. 822.
mis

Com. to the Inspectors
General of Police & Prisons, in contin-
uation of p. 27 30 Aug. 1894, n.s.
2094, Tull, mis.
22.4.95

To the Secy. of Police & Prisons
25c
22/4/95
DESPATCHED
27 APR 95
IN M.S.

in given for copying
in copied
in examined
in signed

189

AGAIN G.O., No.
189

DATED

CURRENT No.

ENCLOSURES TO O. No.

ORDER OF GOVERNMENT

LETTER OF GOVERNMENT

STATEMENT WITH DETTO.

PAPERS NOT FILED UP, BEING MEANT FOR DESPATCH
IN ORIGINAL.

N.B.—

A = Copy in full.
B = Not to be copied.
P = Copy abstract only.
Q = Copy heading only.