INDEXED.

Local & Munl. (1897) Department.

MISCELLANEOUS.

G.O., No. 102 M

DATED 27-1-97

DESPATCHED

[Despatch Abstract.]

Loan

Drawing the attention of the Munl. Council, Ellore, to the remarks of the Sanitary Commr. in the order quoted, regarding the adoption of urgent sanitary measures, before taking into consideration the question of a — for the construction of a market for the munlty.

✓

BACK PAPERS.

G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.

FURTHER PAPERS.

G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.
C. O. 1631 M/97							

Construction of a market, Ellore Municipality.

[5]
500—27-5-95.

LOCAL AND MUNICIPAL DEPARTMENT.

Papers to be read in Proceedings:—

Again G.O., dated 189 , No.

Current No. 2990m of 1896, dated 31st October from the Chairman, M.C. Ellore
Current No. 3339m of 1896, dated 7th December from the Do

Misc.

Order. No. 102 M. Misc. dt. 27-1-97

The Municipal Council's attention of the is again drawn to the remarks of the Sanitary Commissioner in para. 2 of his letters No. 1303, dated 7th August 1895 and No. 289, dated 14th February 1896, The Govt. desires to be informed ~~and it is requested~~ ~~to state~~ what action the Council ~~I~~ propose to take to remedy the defects ~~is~~ by the S.C. pointed out before taking ~~it can be~~ into consdn. the question of ~~permitted to raise~~ a loan for the construction of a market.

(From orders)

flagged A

flagged B

PR
25/1/97

To the Chairman, M.C. Ellore.

DFO

Ous 28/1/97

til
the
water

Construction of a market, Ellore municipality.

Current No. S. 2990 & 3339. M.

From

The Chairman, Municipal Council, Ellore.

2990th of 31st October Chairman, M.C. Ellore
3339th of 7th December Do.

Read

FOR ORDERS.

With the first of the letters read above, the Chairman, Municipal Council, Ellore submitted an application for a loan of Rs.25,000 for the ~~contribution~~ Construction of a market with plans and estimates for the work. On being asked whether these plans and estimates had been approved by the Sanitary Board he now states in the second letter that they were presumed to have had its approval as they had been received from the Engineer, Sanitary Board.

× Flag. A.

2. In para.2 of his letter No.1303 dated 7th August 1895 (in G.O.No.1369 × M dated 19th July 1895) the Sanitary Commissioner stated that the construction of a market, for which the council had then applied to the Sanitary Engineer for a standard plan, might well be put off until other urgent needs such as reforming the existing modes of conservancy and water

supply

FOR ORDERS.

Local & Munl. (1896) Department.

CURRENT No. 2990 M

CHIEF SECRETARY
5 NOV. 1896
GOVERNMENT OF MADRAS

From The Chairman
Municipal Council. Ellore

Reference. ~~Order~~ 1329 / 18/11/96

The Chairman is requested to state whether the approval of the Sanitary Board has been obtained to the plans + Estimates of the proposed market as required in G.O. No. 1283 M. of 3rd August 1896.

V.R.
14/11/96

No. 452

Dated 31-10-96

Received 5-11-96

Registered 5-11-96

Enclosures 4

Spare copies

SUBJECT.

Submitting an application for a loan of Rs 25000 from Govt for the Construction of a market, together with the plans and Estimates.

Copy to desp.
16/11

To
The Chairman, M.C. Ellore.

Desp. 18/11/96

9/11

9/11/11

16/11

BACK PAPERS.

G.O.	No.	Department.	Date.
fo	684	F.D	10-10-96
	1798	L	18-9-96
fo	1283	[illegible]	3-8-96
fo	472	[illegible]	19-3-96

FURTHER PAPERS.

G.O.	No.	Department.	Date.

Extract from the Proceedings of the Municipal Council, Ellore dated the 21st October 1896.

VI ,, Read draft letter and application for market loan.

Approved

(True Extract)

Chairman

1/2991 Nov 96

under G.O. dated 8th February

APPENDIX.

D.

Ellore

Application of the ~~Vániyambádi~~ Municipal Council for a Loan from Governme
of the Local Authorities Loans Act, 1879.

The work or works for the construction or repair of which the loan is required and an estimate of the cost thereof.	The amount which it is proposed to borrow.	The fund or funds on the security of which it is proposed to borrow.	The law or laws under which the said fund or funds is or are levied, received or held.	The period for which the loan is required, the number and amount of the instalments, if any, in which it is proposed that the loan shall be taken, the dates proposed for receiving such instalments, and the instalments, if any, in which it is proposed to repay the loan.	A detail account of revenue an expenditur of local authority for the three last preceding years.	N
~~Construction of a suspension bridge over the Pálár.~~ ~~Rs. 23,400.~~ Construction of a market Rs 22000	~~Rs. 13,800~~ Rs 25000	Ellore ~~Vániyambádi~~ Municipal fund.	The District Municipalities Act IV of 1884 (Madras).	(1) The loan is required for a period of ~~thirty years.~~ ten years.. (2) It is proposed to be taken in ~~one~~ five instalment~~, in March 1896,~~ of Rs ~~50,~~ 5,000 each, and repaid with interest at ~~4½~~ 4½ per cent. in ~~thirty~~ ten equal annual instalments ~~of Rs. 822.~~	Attached herewith.	1st ja 1st ju

---

3. This Sum is to be b
the Security of the
~~and taxes~~ of the Ellore

4. The ~~Loan~~ Law under which
fund is levied
~~rates and taxes are im~~
~~Collected~~ is the Madra
Municipalities Act IV of

5. 1st April 1897. 1st J
1st October, 1st Janu
1st April 1898 at Rs
each date.

6. The loan is required f
of 10 years. It is pr
be repaid with int.
per Cent by 10 equal

7. A detailed accou
income and expendi
Municipal funds

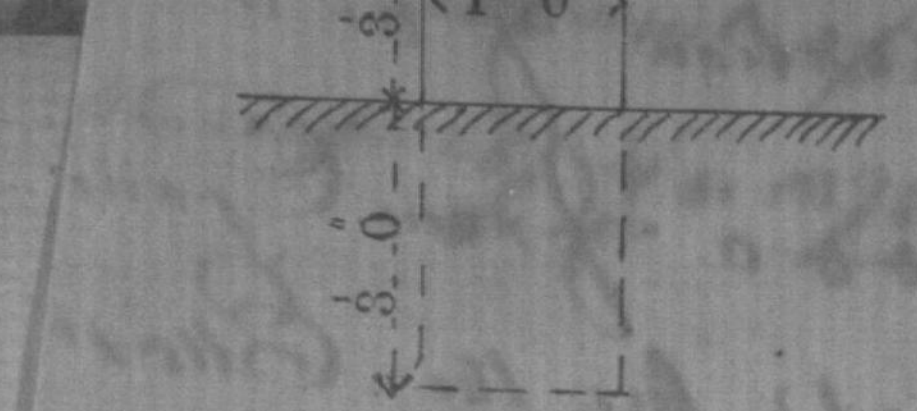

the anchoring chamber will be protected with rail fences consisting of old iron rails fixed in stone uprights.

(Signed) J. HANNAN,
Superintending Engineer, IV Circle.

No. 166-C.

Forwarded to the Local and Municipal Department with reference to G.O., is. No. 900 M., dated 29th May 1895, and in continuation of this office No. 2529-C., ated 16th August 1895.

(Signed) D. Mc. NEIL CAMPBELL, Lieut.-Col., R.E.,
Joint Secretary to Government, P.W.D.

10th January 1896.

ORDER—No. 308 M., dated 21st February 1896.

The plan and estimate for Rs. 23,800, forwarded by the Public Works Department, are sanctioned. A grant of Rs. 10,000 from Provincial funds will be made to he municipal council, and the balance of Rs. 13,800 will be advanced as a loan at [illegible] ent. interest repayable in thirty years.

The council should draw the amount of the grant at once, and, as it is advisable loan should also be advanced in the current year, an application in the

---

under G.O. dated 8th February 1
Local and Municipal.

of the Ellore municipa

Application for a

Rs 25,000 from Go
~~under sec~~ 5 of the Local
~~required~~ by the Ello
Loan Act.

1. The loan is required fo
~~as~~ the Construction of a
estimated to cost Rs 22,0

2. It is proposed to bo
Rs 25,000.

3. This Sum is to be b
the Security of the
~~and taxes~~ of the Ellore

4. The ~~loan~~ Law under whic
~~rates and taxes are im~~ fund is levied
~~Collected~~ is the Madras
Municipalities Act IV of

5. 1st April 1897. 1st J
1st October, 1st Janu
1st April 1898 at Rs
each date.

6. The loan is required fo
of 10 years. It is pr
be repaid with int.
per Cent by 10 equal

7. A detailed accou
income and expendit
Municipal funds

3/2990 M

2/2990

three years is given below.

Detailed account of the income and Expenditure of the Erode Municipality for 1893-94; 1894-95 and 1895-96:—

	Actuals 1893-94	Actuals 1894-95	Actuals 1895-96. in round figures
Receipts.			
Balance brought forward	3042	6902	5990
Tax on Arts	3340	4019	3872
Tax on Buildings and Lands	6615	8452	7113
Tax on Vehicles and Animals	1064	987	1037
Tax on Carts	1830	1778	1870
Tolls	6209	7010	7890
Realization under Special Acts	14	30	35
Rent of lands, buildings &c and Sale pro of lands &c.	298	294	202
Convey Receipts	.	192	2
Revenue from Educational Institutions	80	158	1455
ow Medical Institution	5	.	25
Markets & Slaughter Houses	1488	1485	2145
Fees	1184	1030	1098
ther Fees	425	418	527
under Municipal and other Acts	698	715	62~~4~~5
nts and Contributions from Govt.	128	47	4
— do — from Local Funds	2667	1660	2915
coveries for Services to Private Parties	760	779	773
Miscellaneous	70	38	~~17~~ 24
dvances Recovered	100	~~62~~	~~301~~ 35
Total	30,017	~~35996~~ 35653	~~37895~~ 637
Charges.			
t I.			
New Works.			
Communications	547	1832	~~737~~ 587
Buildings	107	~~1760~~ 1110	3 4687
Drainage	.	.	.
Water Supply	.	.	98
Carried Forward	654	3592	5522

	1893-94	1894-95	1
Brought Forward	654	3592	55
Grant I Continued.			
Repairs.			
Communications	1657	~~3526~~ 3791	~~38~~ 35
Buildings	488	457	2
Drainage	803	644	7
Water Supply	86	146	6
Establishment	536	814	8
Tools and plant and other Stores	54	10~~7~~8	7
Total	4278	~~9286~~ 8902	11.
Grant II.			
Training Schools	28	.	
Municipal Schools			
On the Salary System	.	771	14
On Salary Result System	748	538	8
Salary Grants	442	383	
Result Grants	718	943	330
Inspection	192	209	203
Miscellaneous	117	145	
Total	2245	2989	
Grant III			
Hospitals and Dispensaries	4217	4439	
Contributions	149	238	
Vaccination	385	541	
Registration of Births and Deaths	154	133	
Conservancy road cleaning &c.	6806	~~6610~~ 811	
Total	11,711	~~11961~~ [illegible]	
Grant IV.			
Lighting	1249	1786 5	
Market and Slaughter Houses	66	77	
Choultries	.	.	
Travellers Bungalows	86	90	
Avenues	.	.	
Public Garden, Survey of Land Fee and other Charges	942	~~1404~~ 1257	
Total	2343	~~3357~~ 3189	

	1893-96	1894-95	1895-96.
Grant V.			
Supervision and management	2310	2107	~~2408~~ 2509
Advances Recoverable.	88	~~387~~ 185	~~272~~ 1502
Refunds.	..	3	..
Pension and Gratuity	140	29	..
Balance.	6902	5990	4301
Grand Total C.	30,017	~~35994~~ 36056	37~~895~~ 637

There are no existing Prior Charges upon the funds of this Municipality.

Municipal Office

3973

4242

C. Sitaramayya.
Chairman

GOVERNMENT OF MADRAS

3 / 2990 [illegible]

DESIGN FOR A MARKET

nclosure to letter No. 2004 of 1895

20/1/95

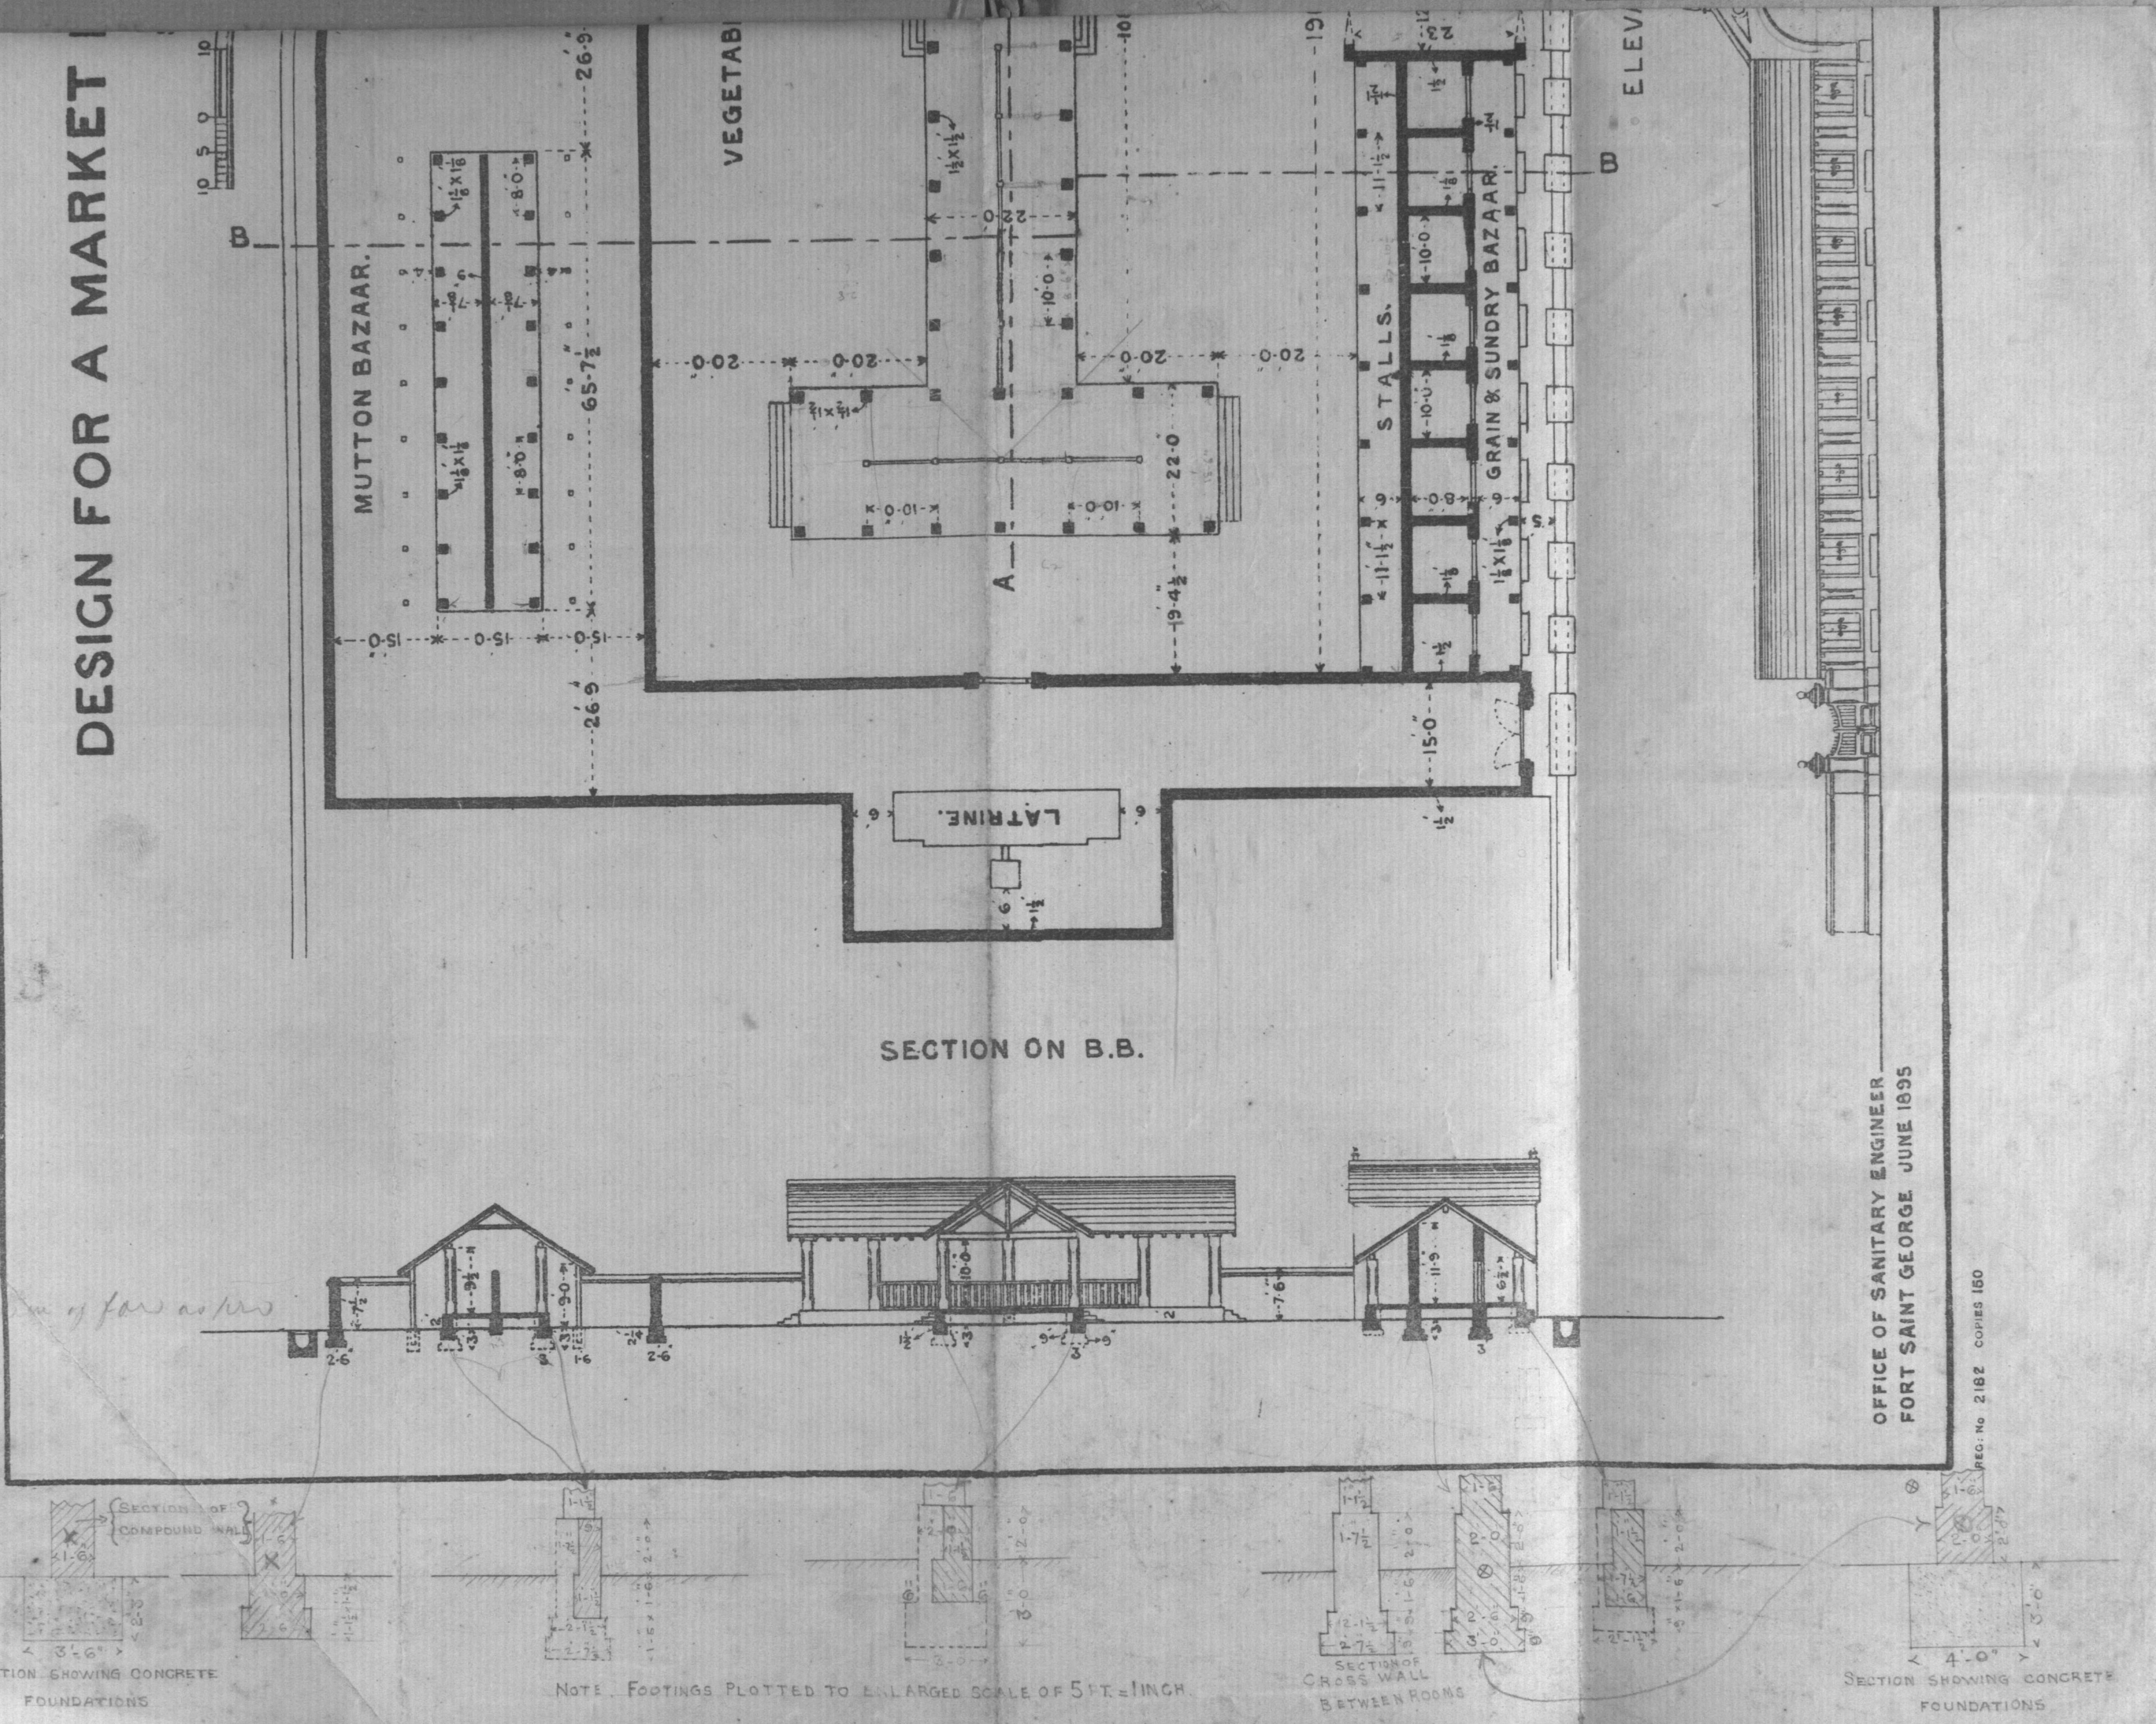

NOTE. FOOTINGS PLOTTED TO ENLARGED SCALE OF 5 FT. = 1 INCH.

OFFICE OF SANITARY ENGINEER
FORT SAINT GEORGE JUNE 1895

REG. No 2162 COPIES 150

No. 14

FOR ABOUT 30,000 PEOPLE.

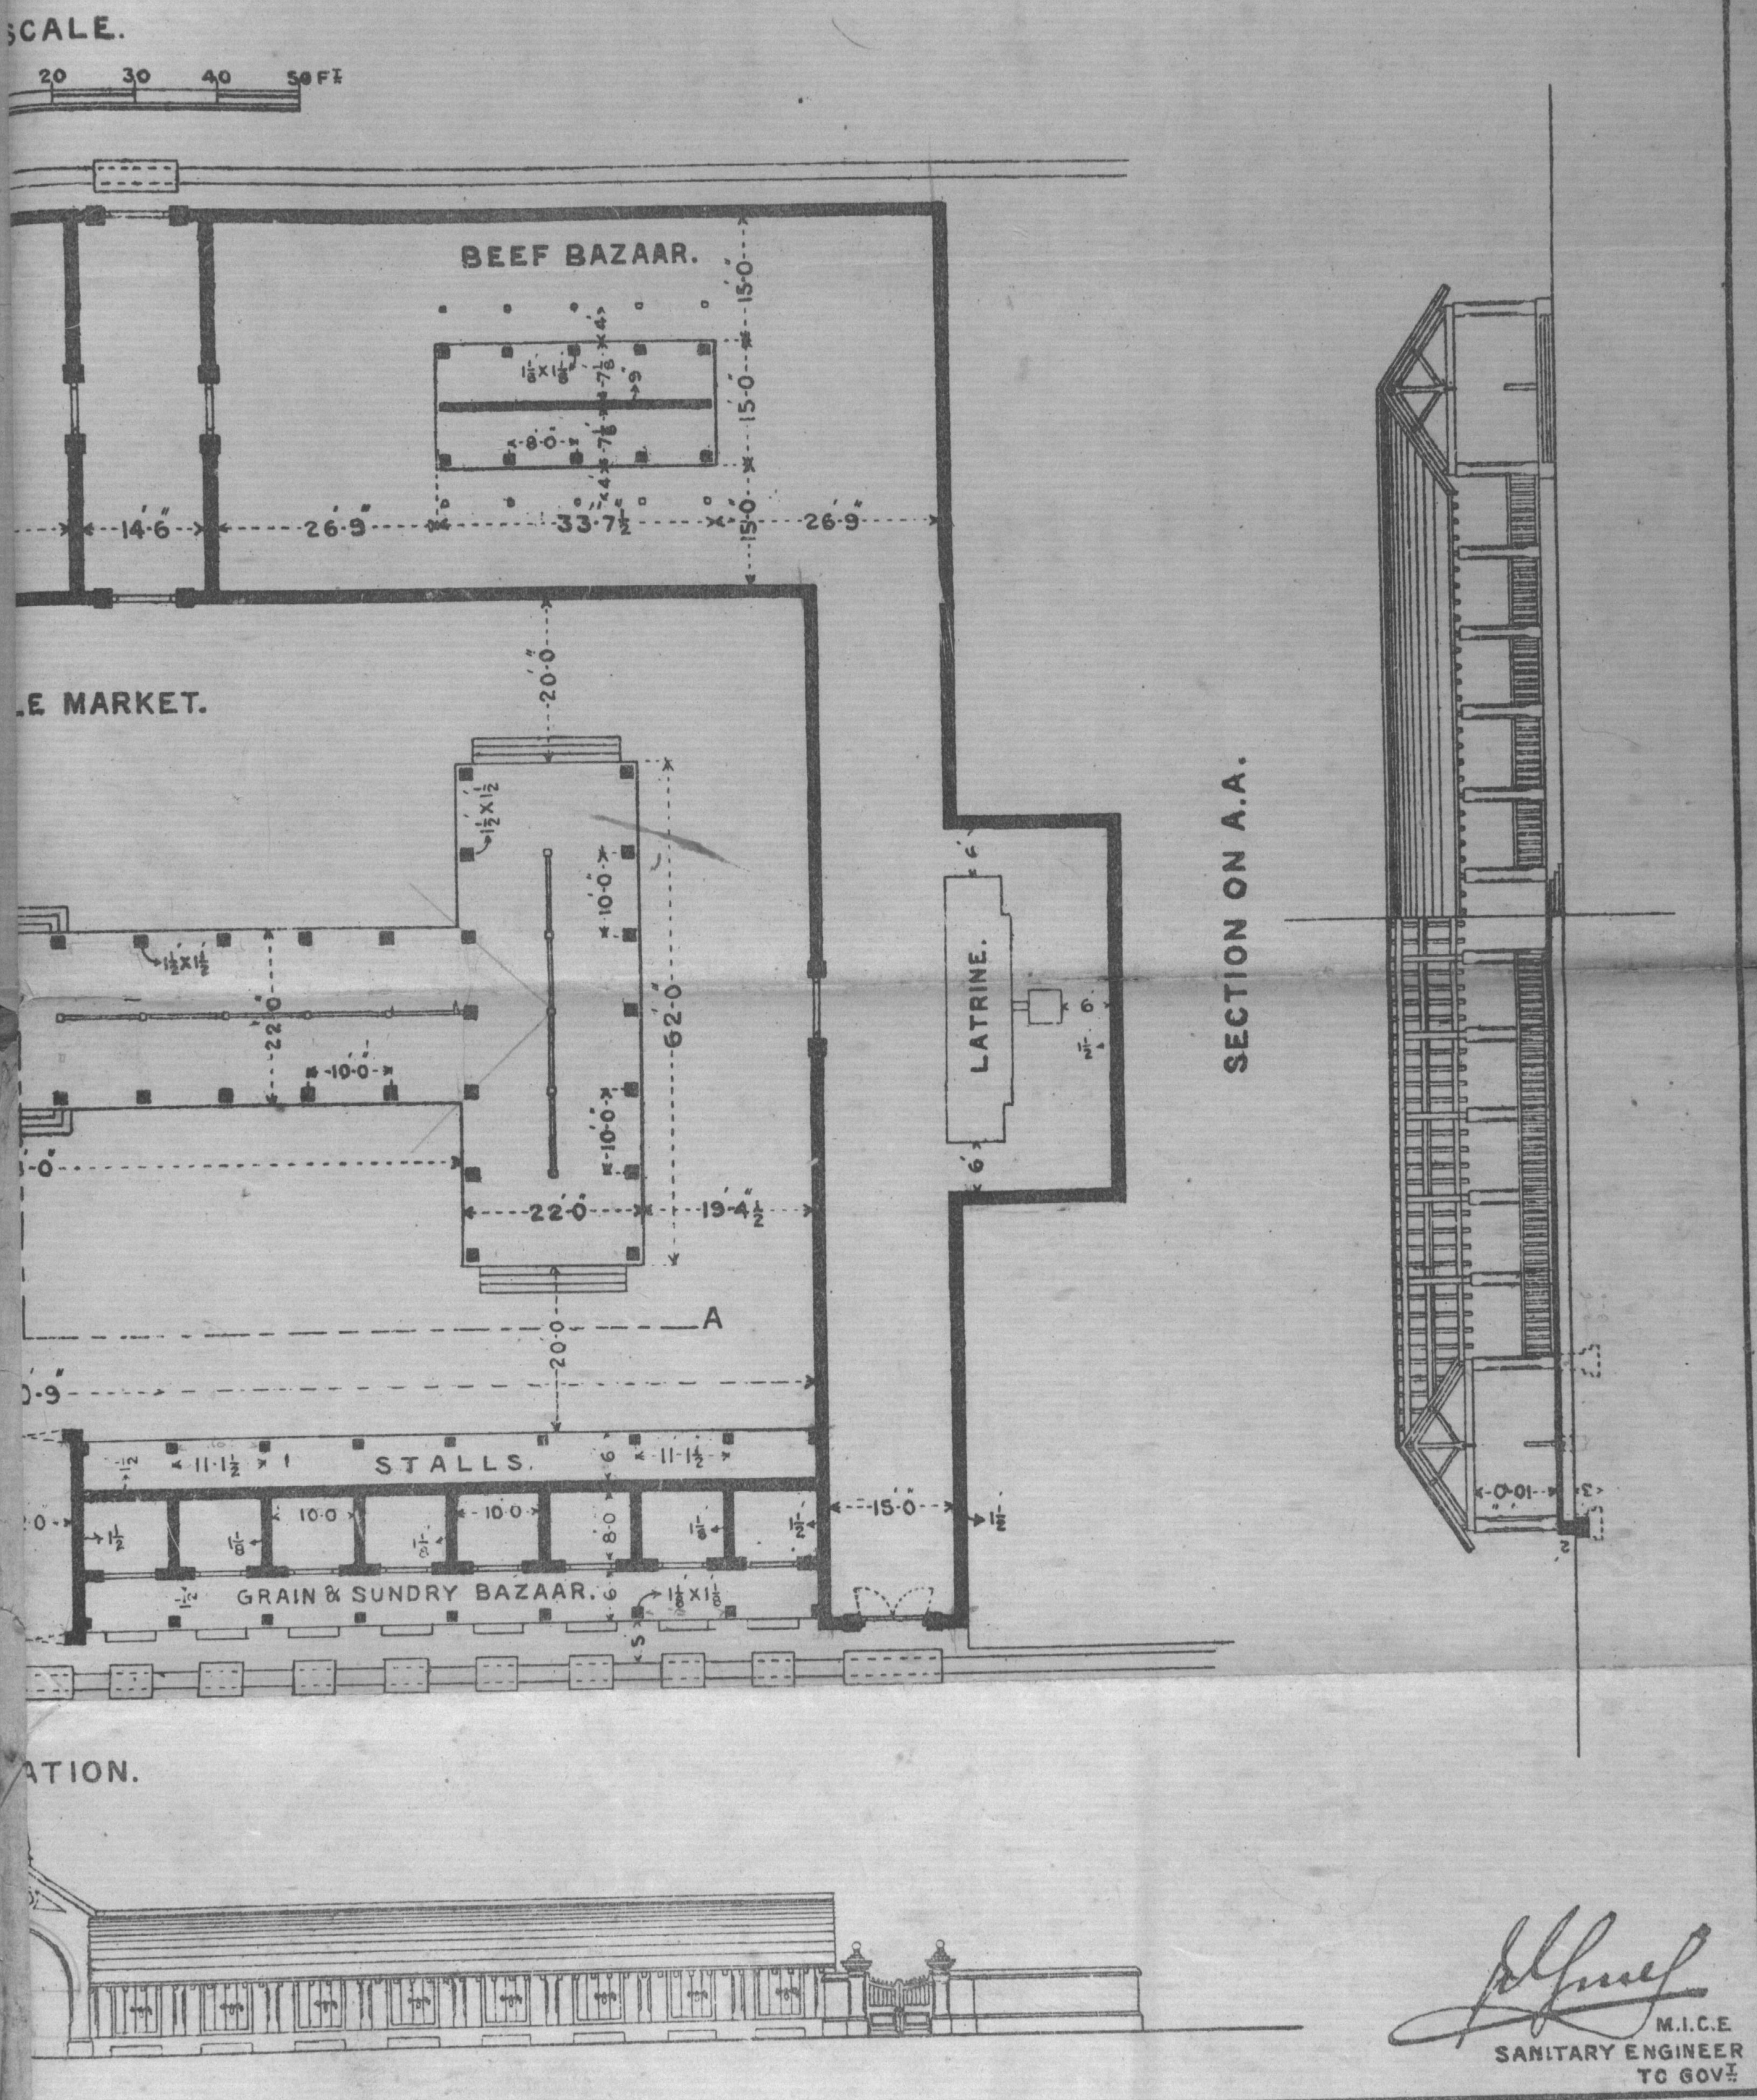

M.I.C.E
SANITARY ENGINEER
TO GOVT.

PHOTO-ZINCO., SURVEY OFFICE, MADRAS,
1895

Market Plan.

Plan.

S. E. 15 500—21-6-95.

GOVERNMENT OF MADRAS.

SANITARY ENGINEER'S DEPARTMENT.

Detailed Estimate No.

Work :— For the Construction of a Market at Ellore

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total quantity of each Description of Work.
		L.	B.	D.		
Vegetable Market						
Earthwork						
Excavating foundation for pillars in the centre ~~hall~~ stall	20	3'-0"	3'-0"	3'-0"	540	
—do— do Side stalls	28	3'-0"	3'-0"	3'-0"	756	
—do— do for retaining walls between pillars in the centre stall	1	154'-0"	1'-6"	1'-6"	347	
—do— do Side Stalls	2	104'-3"	1'-6"	1'-6"	~~469~~ 468	
—do steps in the centre stall	2	~~12'-6"~~ 13'-0"	3'-6"	1'-0"	~~88~~ 78	
—do— do side stalls	4	~~18'-7½"~~ 19'-6"	3'-6"	1'-0"	~~261~~ 234	
Filling in basement between pillars of centre stall	22	8'-6"	~~0'-6¾"~~ 10¾	1'-6"	~~158~~ 231	
Centre of do	1	108'-6"	18'-7½"	1'-6"	~~3031~~ 2929	
Between pillars of side stalls	20	8'-6"	~~0'-6¾"~~ 10¾	1'-6"	~~143~~ 210	
do do at centre	4	8'-6"	~~1'-6"~~ 9	1'-6"	~~76~~ 84	
Centre of side stalls	2	58'-6"	18'-7½"	1'-6"	~~3276~~ 3132	
Between pillars at ends	4	18'-7½"	~~0'-6¾"~~ 10¾	1'-6"	~~63~~ 95	
Side walls for seats	2×2	50'-0"	1'-1½"	~~4'-6"~~ 2-0	~~1012~~ 450	
Total Earthwork in c. feet						~~10220~~ 9554 or 10.000 units
Concrete Work						
Under posts in the centre and side stalls	20	1'-6"	1'-6"	1'-6"	67	
~~Total Concrete Work in c. feet~~						~~67~~
Floor between pillars of centre and side stalls	42	8-0	0 10½	0-6	147	
	4	18-0	0-10½	0-6	32	
Floor of Centre of Centre Stall	1	112-0	18-0	0-6	1008	
Do of Do of Side Do—	2	58-0	18-0	0-6	1044	
Total Concrete C ft					2298	or 23.00 units

Detail of Work.	Number.	MEASUREMENTS IN FEET.			Area or Contents.	Total quantity of each Description of work.
		L.	B.	D.		
Brick Work						
Foundations						
Pillars in the centre and side stalls	48	2'-6"	2'-6"	3'-0"	900	
Side walls for seats	2×2	50'-0"	1'-1½"	4'-6"	1012	
Do at sides	4	7'-9"	1'-1½"	4'-6"	156	
Retaining walls between pillars	42	7'-~~7½~~ 6"	1'-6"	1'-6"	~~721~~ 709	
Do do at ends of side stalls	4	17'-~~7½~~ 6"	1'-6"	1'-6"	~~249~~ 158	
Steps to centre stall	2	13'-6"	3'-6"	1'-0"	95	
Do to side stalls	4	19'-~~7½~~ 6"	3'-6"	1'-0"	~~275~~ 273	
Basement						
Pillars in the centre & side stalls	48	2'-0"	2'-0"	2'-0"	384	
Retaining walls between pillars	42	8'-0"	1'-1½"	2'-0"	756	
Do do at ends of side stalls	4	18'-0"	1'-1½"	2'-0"	162	
Steps to centre stall	2	11'-2"	3'-0"	1'-0"	67	
Do to side stalls	4	18'-6"	3'-0"	1'-0"	222	
Superstructure						
Pillars in the centre and side stalls	48	1'-6"	1'-6"	10'-0"	1080	
Total brick work in c. feet						~~6079~~ 5974 Units or 59.7
Plastering						
Pillars all round	48	6'-0"	"	10'-0"	2880	
Basement all round	1	508'-0"	"	2'-0"	1016	
~~Sides~~ tops and ends of steps to centre stall	2	~~12'-0"~~ 43-6	"	1'-0"	~~24~~ 87	
Do to side stalls	4	~~6-0"~~ 61-6	"	1'-0"	246	
Walls all round the seats	2	123'-0"	"	1'-0"	246	
Total Plastering in Sqrs						~~4190~~ 4475 Units or 44.80
Plastering with Portland Cement ½" thick.						
~~Flooring~~						
~~Between pillars of centre stall~~	22	8'-6"	0'-6¾"	"	~~105~~	
Centre of centre ~~do~~ stall	1	108'-0"	~~18'-7½"~~ 22-0"	"	~~2021~~ 2376	
Carried over					~~2126~~ 2376	

Detail of Work.	Number.	MEASUREMENTS IN FEET.			Area or Contents.	Total quantity of each Description of work.
		L.	B.	D.		
Brought forward					~~2126~~ 2376	
~~Between pillars of side stalls~~	20	8'-6"	0'-6¾"	"	~~96~~	
~~Do do at centre~~	4	8'-6"	1'-6"	"	~~51~~	
Centre of side stalls	2 ~~2~~	62-0 ~~58'-6"~~	22-0 ~~18'-7½"~~	"	2728 ~~2179~~ Sq. ft 5104	
~~Between pillars at ends~~	4	18'-7½"	0'-6¾"	"	~~42~~	
Deduct for Pillars	48	1-6	1-6		108	
Net Total flooring in Sq. feet						~~4494~~ 4996 Units or 50.00
Roofing						
Centre stall front & rear	2	117'-6"	15'-6"	"	3642	
Front of side stalls	2	65'-0"	15'-6"	"	2015	
Rear of do	4	27'-0"	15'-6"	"	1674	
Total Roofing in Sqr						73.31 Units or 73.30
Wood Work						
King posts	26	7'-0"	0'-4"	0'-4½"	23	
Principal Rafters	52	12¼'-0 3"	0'-4"	0'-6¼"	111	
Common rafters 2¼ feet apart including jack rafters	214	15'-0"	0'-~~3~~ 2½	0'-~~6"~~ 4¼	~~406~~ 237	
Valley rafters	4	19'-0"	0'-3"	0'-6"	10	
Tie beams	26	21'-6"	0'-4"	0'-~~7¼~~ 6¾"	~~113~~ 105	
Struts	52	5¾'-0 9"	0'-4"	0'-4½"	38	
Ridge piece along centre stall	1	130'-0"	0'-3½"	0'-8"	~~25~~ 22	
Do along side stalls	2	65'-0"	0'-3½"	0'-8"	~~25~~ 22	
Purlins and pole plate	~~4~~ 1	~~195'-0"~~ 800-0	0'-~~4"~~ 3½"	0'-7"	~~152~~ 136	
Pillar plates	48	1'-0"	1'-0"	0'-2"	8	
Posts to the centre and side stalls	20	5'-0"	0'-4"	0'-4"	11	
Side posts along centre stall	24	3'-0"	0'-3"	0'-3"	4½	
Longitudinal Top and Bottom frame for raised platform	2	100'	3"	3"	12½	
Carried over					~~421~~ 740	

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total quantity of each Description of Work.
		L.	B.	D.		
Brought forward					~~934~~ 740	
Top and Bottom frame across between each seat	12	22'	3"	3"	16½	
Top and Bottom frame to the wooden railings in the side stall	2	~~40'~~ 80	3"	3"	~~5~~ 10	
Rails do (uprights)	2×40	1½"	1½"	3½	4	
Planks between frames in centre raised platform	1	100	½"	4'	17	
Planks between frames across seats	2×12	5	½"	3½'	17½	
Total C. feet of Teak wood						~~994~~ 805 Cft.
Painting						
Railings for the raised platform longitudinal	2	100	.	5'	1000	
do sides of each seat	2×12	10'	4'	"	960	
Railings to side stall	2	40	3	"	240	
Total painting Sq. feet						2200 or Sqrs 22
Iron work for Trusses — L.S.						
~~Gr[illegible] and Sundry bazaars~~						
Excavation						
Front and rear walls of main rooms	2×2	~~87 7/8~~ 92-4½	3'-0"	3'-0"	~~3164~~ 3326	
Cross walls	2×7	6'-6"	2'-7½"	3'-0"	~~698~~ 717	
End walls	2×2	6'-6"	3'-0"	3'-0"	234	
Verandah pillars	2×16	2'-1½"	2'-1½"	2'-3"	~~213~~ 325	
Retaining walls between pillars	2×16	~~9'-0"~~ 8-6	1'-6"	1'-6"	~~648~~ 612	
Verandah end walls	2×4	~~6'-0"~~ 4-6	3'-0"	3'-0"	~~432~~ 324	
Front and rear walls of the gate	2	~~18'-0"~~ 16-6	3'-0"	3'-0"	~~324~~ 297	
Total excavation						~~5713~~ 5835 or 5.800 Units

S. E. / 15 500—21-6-95.

GOVERNMENT OF MADRAS.

SANITARY ENGINEER'S DEPARTMENT.

Detailed Estimate No.

Work :—

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total quantity of each Description of Work.
		L.	B.	D.		
Filling in basement						
Rooms	16	~~10'-0"~~ 9-6	~~8'-0"~~ 7-6	1'-6"	~~1920~~ 1710	
Front and rear verandahs	2×2	87 ~~7/8~~ 4½	4'-~~7½"~~ 1½"	1'-6"	~~3879~~ 2163	
Between pillars	2×16	9'-6"	0'-6"	1'-6"	228	
Total filling in C. feet						~~6027~~ 4101 or 4.100 Units
Concrete in mortar						
Floor of rooms	2×8	9-6	7-6	0-6	570	
Front and rear verandahs	2×2	87-4½	4-1½	0-6	721	
Between pillars	2×16	9-6	0-6	0-6	76	
Total Concrete in Cft						1367 or 13.70 units
Brickwork						
Footings						
Foundation & basement						
Front and rear walls	2×2	92'-1½"	2'-9"	1'-6"	1520	
End walls	2×2	18'-9"	2'-9"	1'-6"	309	
Cross walls	2×7	6'-9"	2'-4½"	1'-6"	336	
Verandah pillars	2×16	2'-1½"	2'-1½"	0'-9"	108	
Retaining walls between pillars	2×16	9'-~~0"~~ 6	1'-6"	1'-6"	~~648~~ 684	
Front and rear walls of gate	2	16-3	2-9	1-6	134	
Above footings up to ground level—						
Front and rear walls	2×2	91-4½	2-0	1-6	1097	
End walls	2×2	7-6	2-0	1-6	90	
Cross walls	2×7	7-6	1-7½	1-6	256	
Verandah pillars	2×16	1-7½	1-7½	1-6	127	
Front and rear walls of gate	2	15-6	2-0	1-6	93	
				C.ft	4754	
Deduct for						
Excess taken under front & rear walls of gate in foundation	2	9-1½	2-4½	3-0	130	
				C.ft	130	

S.E. 15 500—21-6-95.

GOVERNMENT OF MADRAS.

SANITARY ENGINEER'S DEPARTMENT.

Detailed Estimate No.

Work :—

uantity of each
ption of Work.

		B.F.			4624
Basement					
Front and rear walls	2x2	9'-10½"	2'-0"	2'-0"	~~1470~~ 1462
End walls	2x2	~~18'-6"~~ 16-3	2'-0"	2'-0"	~~296~~ 260
Cross walls	2x7	7'-6"	1'-7½"	2'-0"	341
Verandah pillars	2x16	1'-7½"	1'-7½"	2'-0"	169
Retaining walls between pillars	2x16	9'-6"	1'-7½"	2'-0"	~~588~~ 684
Front and rear walls of gate	2	~~16'-3"~~ 15-6	~~2'-9"~~ 2-0	~~1'-6"~~ 2-0	~~134~~ 124
~~Do Do~~	~~2~~	~~15'-6"~~	~~2'-0"~~	~~3'-6"~~	~~217~~
Steps	2x8	6'-0"	1'-0"	1'-6"	144
		Carried over			6288

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total quantity of each Description of work.
		L.	B.	D.		
Brought forward					~~6280~~ 7808	
Superstructure						
Front and rear walls	2x2	87'-10½"	1'-6"	11'-3"	5931	
End walls	2	11 8'-0"	1'-6"	11'-3"	~~270~~ 371	
Cross walls	2x7	8'-0"	1'-1½"	11'-9"	1480	
Verandah side walls	2x2	6'-0"	1-6"	8'-7½"	310	
Pillars	2x16	1'-1½"	1-1½"	6'-6"	263	
Gable of cross walls	2x7	9'-6"	1'-1½"	3'-2"/2	237	
do end walls	2	11'-0"	1'-6"	3'-8"/2	61	
Side walls of gate	2	23'-0"	1'-6"	15'-0"	1035	
Front walls of do	2	15'-0"	1'-6"	15'-0"	675	
do gables	2	15'-0"	1'-6"	5'-0"/2	113	
Total Brick work					~~16655~~ 18284	
Deducted for						
Doors	2x8	6'-0"	1'-6"	6'-0"	864	
Openings up to spring line	2	10'-0"	1'-6"	8'-0"	240	
do above	2	area 46	1'-6"	"	138	
Flat archwork over doors	16	7-0	1-6	1-1½	188	
Segmental archwork	2	19-6	1-6	1-1½	66	
Total deduction					~~1242~~ 1497	
Total Brick work less deductions c. feet						~~15413~~ 16787 or 167.90 units
Archwork as per above deducted cons cft					255	or 2.60 units
Plastering						
Rooms inside	2x8	36'-0"	"	11'-9"	6768	
do outside	2x2	87'-10½"	"	10'-9	3779	
Gable of cross wall both sides & end walls insides	2x16	8'-0"	"	1'-6"	384	
do end walls outside	2x2	11'-0"	"	1'-10"	~~48~~ 81	
Verandah pillars all round	2x16	4'-6"	"	6'-6"	936	
Verandah side walls both inside & outside	2x8	6'-0"	"	9'-6"	~~864~~ 912	
Steps	2x8	8'-0'	"	0'-6"	64	
Basement all round	2x2	87'x10½"	"	2'-0"	703	
Carried over					~~13546~~ 13627	

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total quantity of each Description of work.
		L	B.	D.		
Brought forward					~~13546~~ 13627	
Side walls of gate both sides	2x2	13/2=6½	"	8'-0"	208	
Front and rear wall of gate	2x2	12-0 ~~10'-0"~~	"	17'-0"	~~340~~ 816	
Sides and soffits of arch	2	34-0	1-6	"	102	
Gable wall both sides	2x2	15'-0"	"	2'-6"	150	
sides and soffits of doors	2x8	18-0	1-6	"	432	
Total Plastering					~~14244~~ 15335	
Deducted for						
Doors both sides	2x16	6'-0"	"	6'-0"	~~1132~~ 1152	
(Gate) opening up to spring line	2x2	10'-0"	"	8'-0"	320	
do above spring line	2x2	6'-3"	"	7'-0"	175	
Total Plastering					~~1627~~ 1647	
Total Plastering less deduction sqrs						~~12617~~ 13688 or 136.90 units
Plaster ~~Flooring~~ with Portland Cement ½" thick						
Rooms	2x8	10'-0"	8'-0"	"	1280	
Front and rear verandahs	2x2	87'-10½"	6-0" ~~4'-7½"~~	" Sq.ft	~~1625~~ 2109	
					3389	
~~do between pillars~~	~~2x16~~	~~10'-0"~~	~~0'-3"~~	"	80	
Deduct for pillars	2x16	1-1½	1-1½	Sq ft	41	
~~Passage~~	~~1~~	~~23'-0"~~	~~12'-0"~~	"	~~276~~	
~~do gate~~	~~2~~	~~10'-0"~~	~~1'-6"~~	"	30	
Net Total ~~flooring~~ plastering in Sq. feet					3348	~~3291~~ 33.50 units
Roofing						
Front and rear	2x2	89'-4½"	"	16'-8"	~~590~~ 5720	
do Passage	2	28'-6"	"	11'-0"	627	
Total Roofing in Sq. feet						~~1217~~ 6347 or 63.50 units
Wood work						
Bressummers over verandah pillars	2x2	89'-4½"	0'-4"	0'-6"	60	
Wall plates plaster along side walls	2x2	89'-4½"	0'-3"	0'-3" ~~4"~~	~~30~~ 22	
Ridge piece	2	89'-4½"	0'-3 5"	0'-8 7½"	~~47~~ 30	
Carried over					~~137~~ 112	

Detail of Work.	Number.	Measurements in Feet. L.	B.	D.	Area or Contents.	Total quantity of each Description of Work.
Brought forward					112 ~~137~~	
Common rafters	2x80	15'-6"	2¼ 0'-3	0'-4¼"	183 ~~206~~	
Planks for doors	2x8x6	1'-0"	0'-1"	6'-0"	48	
Frames at top sides and bottom	2x8	27'-4"	0'-4"	0'-6"	73	
Ridge piece for passage	1	25-0	0-3	0-8	4	
Wall plate to passage rafters	2	25-0	0-3	0-3	3	
Common rafters over passage	2x12	10'-0"	2½ 0'-3"	0'-4¼"	18 ~~20~~	
Pillar plates	2x16	1-0	1-0	0-2	5	
Total woodwork C.feet						446 ~~484~~ C.ft
Mutton Stalls						
Excavation						
Verandah to wooden pillars	18	1'-6"	1'-6"	3'-0"	122	
Do centre pillars	18	2-7½ ~~3'-0"~~	2-7½ ~~3'-0"~~	3'-0"	372 ~~486~~	
Wall at centre	1	65'-7½"	1½ 1'-6"	1'-0"	74 ~~98~~	
Retaining walls between pillars	2x8	4½ 5'-0"	1½ 1'-6"	1'-6"	145 ~~180~~	
Do at sides	2	9-6 ~~8'-10½"~~	1½ 1'-6"	1'-6"	32 ~~40~~	
Total excavation in c.feet						~~745~~ 926 or ·750 Units
Filling in						
Platform level	1	63'-4½"	10 11'-6"	1'-6"	998 ~~1093~~	
Between pillars	16	4" 6'-10½	10½ 0'-3"	1'-6"	134 ~~42~~	
Total filling in c. feet						2 1135 or 1·100 Units
Concrete in mortar						
Between pillars	16	6-4½	0-10½	0-6	45	
Centre wall	2	64-1½	5-3	0-6	337	
Total Concrete C.ft						382 or 3·80 Units
Brickwork Foundation						
Under wooden post	18	1'-6"	1'-6"	3'-0"	122	
Centre pillars	18	2-4½"	2-4½"	1-6	152	
	18	1-7½	1-7½"	1'-6"	71 ~~54~~	
Retaining walls between pillars	16	6'-4½"	1'-1½"	1'-6"	172	
Do at sides	2	10-6 ~~11'-9"~~	1'-1½"	1'-6"	35 ~~40~~	
Centre wall	1	65'-7½"	1'-1½"	3'-0"	74 ~~221~~	
Basement						
Centre Pillars	18	1-7½ ~~2'-0"~~	1-7½ ~~2'-0"~~	2'-0"	95 ~~144~~	
Retaining walls between pillars	16	4½ 6'-10½	0'-9"	2'-0"	153 ~~165~~	
Do. at sides	2	10-6	0-9	2-6	32	
~~Carried over~~					~~915~~	
Centre wall	1	65-7½	1-1½	2-0	148	
Carried over					1054	

S.E. 15 500—21-6-95.

GOVERNMENT OF MADRAS.

SANITARY ENGINEER'S DEPARTMENT.

Detailed Estimate No.

Work :—

Detail of Work.	Number.	Measurements in Feet. L.	B.	D.	Area or Contents.	Total quantity of each Description of Work.
Brought forward					1054 ~~915~~	
Superstructure						
Centre pillars	18	1'-1½"	1'-1½"	9'-6"	215	
Do wall	1	65'-7½"	1½" 0'-9"	6'-0"	3 295	
Total Brick work in c. feet						1562 ~~1425~~ or 15·60 Units
Plastering						
Basement all round	1	161'-3"	"	2'-0"	323	
Pillars	18	4'-6"	"	9'-6"	770	
Centre wall both sides and top	1	10½ 65'-7½"	"	12'-9"	840 ~~836~~	
Plastering with Portland Cement ½" thick Total Plastering in sq. feet						1933 ~~1929~~ or 19·30 Units
Flooring	2	65-7½	7-1½	"	935 Sqft	
~~Between pillars~~	~~16~~	~~6'-10½"~~	~~0'-3"~~	"	~~27½~~	
Deduct for pillars	18	1-1½"	1-1½	"	23	
~~Centre portions~~	~~2~~	~~65'-7½~~	~~5'-9"~~	"	~~754 11/16~~	
plastering						
Net Total flooring in sq. feet						912 ~~782~~ or 9·10 Units
Roofing						
Front and rear	2	68'-7½"	18'-0"	"	2470½	
Total Roofing in sq. feet						2471 or 24·70 Units
Woodwork						
Bressummers over centre pillars	2	68-1½ 65'-7½"	0'-4"	0'-5"	19 ~~18 1/16~~	
Common rafters	66	16'-6"	2¼ 0'-4"	4½ 0'-3"	80 ~~90 3/4~~	
Collar pieces	33	8'-0"	2 0'-4"	4 0'-2"	14 2/3	
Bressummer over verandah wooden post	2	68-1½ 65'-7½	3 0'-4"	4 0'-3"	11 1/3 ~~10 15/16~~	
Verandah posts outside	18	0'-4"	0'-4"	12'-0"	24	
Pillar plates	18	1-0	1-0	0-2	3	
Total woodwork in c. feet						152 ~~158½~~ C.ft

Detail of Work.	Number.	Measurements in Feet. L.	B.	D.	Area or Contents.	Total quantity of each Description of work.
Beef stalls						
Excavation						
Verandah pillars	10	1'-6"	1'-6"	3'-0"	67½	
Centre pillars	10	2-7½ ~~3'-0"~~	2-7½ ~~3'-0"~~	3'-0"	207 ~~270~~	
Do Wall	1	33'-7½"	1½ 1'-6"	1'-0"	38 ~~50 7/16~~	
Retaining walls between pillars	8	4½ 5'-0"	1½ 1'-6"	1'-6"	73 90	
Do at sides	2	9-6 ~~8'-10½"~~	1½ 1'-6"	1'-6"	32 39 15/16	
Total excavation in c. feet						417½ ~~517~~ or ·420 Units
Filling in						
Platform level	1	31'-4½"	10-6 ~~11'-6"~~	1'-6"	494 ~~541 7/32~~	
Between pillars	8	4½ 6'-10½"	0-10½ ~~1'-3"~~	1'-6"	67 ~~20 5/8~~	
Total filling in c. feet						562 or ·560 Units
Concrete in mortar						
Between pillars	8	6-4½	0-10½	0-6	22	
Centre walls	2	32-1½	5-3	0-6	169	
Total Concrete in						Cft 191 or 1.90 units
Brickwork						
Foundation						
Under wooden post	10	1'-6"	1'-6"	3'-0"	67½	
Centre pillars	10 10	2-4½ 1'-7½"	2-4½ 1'-7½"	1-6 1'-6"	85 39 39/64	
Retaining walls between pillars	8	4½ 6'-10½"	1'-1½"	1'-6"	86 ~~92 13/16~~	
Do at sides	2	10-6 ~~11'-9"~~	1'-1½"	1'-6"	35 ~~39 21/32~~	
Centre wall	1	33-7½"	1 1'-1½"	3'-0"	38 ~~113 31/64~~	
Basement						
Centre pillars	10	1-7½ ~~2'-0"~~	1-7½ ~~2'-0"~~	2'-0"	53 ~~80~~	
Retaining wall between pillars	10	4½" ~~6'-10½"~~	0'-9"	2'-0"	96 ~~103 1/8~~	
Do at sides	2	10-6	0-9	2-0	32	
Centre wall	1	33-7½	1-1½	2-0	76	
Superstructure						
Centre pillars	10	1'-1½"	1'-1½"	9'-6"	120 15/64	
Do wall	1	1½" 33'-7½"	0'-9"	6'-0"	149 ~~151 1/16~~	
Total brickwork in c. feet						877⅓ ~~671~~ or 8.80 Units
Plastering						
Basement all round	1	97'-3"	"	2'-0"	194½	
Pillars	10	4'-6"	"	9'-6"	427½	
Centre wall	1	10½ 33'-7½	"	12'-9"	2 439	
Total Plastering in Sq. feet						1054 ~~1061~~ or 10.50 Units

---

Detail of Work.	Number.	Measurements in Feet. L	B.	D.	Area or Contents.	Total quantity of each Description of work.
Plastering with Portland cement ½" thick.						
Flooring	2	33-7½	7-1½	"	479	
~~Between pillars~~	~~8~~	~~6'-10½"~~	~~0'-3"~~	" Sq. ft	13 3/4	
Deduct for pillars	10	1-1½	1-1½	"	13	
~~Centre portions~~	~~2~~	~~33'-7½"~~	~~5'-9"~~	" Sq. ft	386 11/16	
Net Total ~~flooring~~ Plastering in sq. feet						466 ~~399~~ or 4.70 Units
Roofing						
Front & rear	2	36 ~~33'-7½"~~	18'-0"	"	1318½ ~~1210½~~	
Total roofing in sq feet						1319 ~~1211~~ or sqrs 13.20 ~~12.11~~
Woodwork						
Bressummers over centre pillars	2	36-1½" ~~33'-7½"~~	0'-4"	0'-5"	10 ~~9~~ 49/144	
Common rafters	34	16'-6"	2¾ 0'-4"	4 0'-3"	41 ~~77 3/4~~	
Collar pieces	17	8'-0"	2 0'-4"	4 0'-2"	7½	
Bressummers over verandah wooden posts	2	36-1½ ~~33'-7½"~~	3 0'-4"	4 0'-3"	6 ~~5 29/48~~	
Verandah posts	10	0'-4"	0'-4"	12'-0"	13⅓	
Total wood work in c. feet						77 5/6 ~~113 1/3~~ or 78 Cft
Compound walls						
Excavation						
For inner wall	1	429-9 ~~431'-9"~~	2'-6"	2'-3"	2417 ~~2427~~	
do outer wall	1	651-9 ~~648'-9"~~	2'-6"	2'-3"	3666 ~~3649~~	
do Partition walls	2	44 ~~45'-0"~~	2'-6"	2'-3"	495 ~~506~~	
Total excavation in c. feet						6578 ~~6582~~ or 6.500 Units
Brick work						
Foundation						
For inner wall	1	430 ~~431'-0"~~	2'-3"	2'-3"	77 ~~2182~~	
do outer wall	1	652 ~~648'-0"~~	2'-3"	2'-3"	3301 ~~3282~~	
do Partition walls	2	44-3 ~~45'-0"~~	2'-3"	2'-3"	448 ~~455~~	
Superstructure						
For inner wall	1	9 430'-6"	1'-6"	6'-6"	4200 ~~4192~~	
For outer wall	1	652-9 ~~648'-0"~~	1'-6"	6'-6"	64 ~~6318~~	
For Partition walls	2	45'-0"	1'-6"	6'-6"	878 ~~817~~	
do coping	1	1173-6 ~~1168'~~	1'-6"	1'-0"	1760 ~~1752~~	
Total Brick work in c. feet					19128 ~~18998~~	

Carried over

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total quantity of each Description of Work.
		L.	B.	D.		
Deduct for			Sq. ft		19128	
Door ways	8	8'-0"	1'-6"	7'-6"	720	
Total deduction c. feet					720	
Total brickworks less deduction c. feet						~~18278~~ 18408 or 184.00 Units
Plastering						
Wall, inside, outside and top		~~1104~~ 1109-6	"	17'-0"	~~18768~~ 18862	
Total Plastering in Sqrs						18$\overset{8}{7}$.68
Drain						
Excavation						
Front and rear	2	227'-0"	4'-0"	4'-0"	7264	
Total excavation in c. feet						7264 or 7.300 Units
Brickwork						
Same quantity as per excavation					7264	
Deduct						
Open space of drain	2	227	area 2.25	.	1021	
Total deduction in c. feet					1021	
Total brick work ~~in~~ less deduction						6243 C. ft. 62.4 Units
Plastering						
Inside the drain	2	227	"	5'-0"	2270	
Total Plastering in Sqrs						22.7
Slab stones over drain opposite to grain bazaars	16	5'-0"	4'-0"	(0'-3")	320	
In front of gate ways	3	12'-0"	4'-0"	(0'-3")	144	
In rear gate ways	1	10'-0"	4'-0"	(0'-3")	40	
Total slab stones in Sq feet						504

95-500.

Abstract of Detailed Estimate No.   , dated   , for the construction of a Vegetable Market at Ellore

Quantity.	Description of Work.	Rate.			Per	Amount.			Total.		
		RS.	A.	P.		RS	A.	P.	RS.	A.	P.
	Vegetable Market										
10.220	Units C. ft of Earthwork, Excavation and filling in	3	7	6	1000 Cft	34	0	-			
~~67~~ 23.00	Do of Concrete broken stone in ~~chunam~~ mortar	14	0	0	100 Cft	322	0	0			
~~6079~~ 59.70	Do Brick work in ~~chunam~~ mortar	24	0	0	do	1433	"	"			
~~41.90~~ 44.80	Sqrs of Plastering with ~~chunam~~ mortar 2 coats	2	8	0	100 Sft.	112	"	"			
~~4494~~ 50.00	Do Plastering the floor ~~Sq. ft of flooring with concrete 6" thick well rammed and plastered with portland cement~~ ½" thick	6	0	0	do	300	"	"			
73.30	Sqr of tiled roofing with Mangalore tiles including teak reepers	14	0	0	do	1026	"	"			
~~994~~ 805	C. ft Jungle wood wrought & fixed	1	12	0	Cft	1409	"	"			
22.00	Units of Painting with two coats of wood oiling	1	8	0	100 Sft	33	"	"			
	Iron work for trusses	-	-	-	-	60	"	"			
	Grain & Sundry Bazaars										
~~5713~~ 5.800	Units C. ft of Earthwork excavation	2	14	3	1000 Cft.	17	"	"			
~~6027~~ 4.100	Do filling in	"	9	3	do	2	"	"			
13.70	Do of Concrete in mortar	14	"	"	100 Cft	192	"	"			
~~15413~~ 167.90	Do Brickwork in ~~chunam~~ mortar	24	"	"	do	4030	"	"			
2.60	Do Bricks arch work	28	"	"	do.	73	"	"			
~~126.17~~ 136.90	Sqrs. Plastering with ~~chunam~~ mortar 2 coats	2	8	"	100 Sft.	342	"	"			
~~3291~~ 33.50	Do Plastering the floor ~~Sq. ft Flooring with concrete 6" thick well rammed & plastered with portland cement~~ ½" thick	6	"	"	do	201	"	"			
~~12.17~~ 63.50	Sqr. Tiled roofing with Mangalore tiles including teak reepers	14	"	"	do.	889	"	"			
~~484~~ 446	C. ft Jungle wood wrought & fixed	1	12	0	Cft.	781	"	"			
						11256	"	"			
	Grand Total of Estimate										

Office of Sanitary Engineer to Government,
Fort St. George, 25th Oct 1895.

pr Sanitary Engineer to Government.

S. E. 18 20-5-95-500.

Abstract of Detailed Estimate No. , dated , for the construction of a Vegetable Market at Ellore

Quantity.	Description of Work.	Rate. RS.	A.	P.	Per	Amount RS	A.	P.	TOTAL. RS.	A.	P
						11256	0	0			
	Mutton Stalls										
·750 ~~926~~	Units ~~C.ft~~ of Earthwork excavation	2	14	3	1000 Cft	2	0	0			
4·100 ~~1135~~	do Filling in	"	9	3	do	1	"	"			
3·80	Do Concrete in mortar	14	0	0	100 Cft	53	"	"			
15·60 ~~1425~~	do Brickwork in ~~Chunam~~ mortar	24	0	0	do	374	"	"			
30 19·29	Sqrs Plastering with ~~Chunam~~ mortar	2	8	0	100 Sqft	48	"	"			
9·10 ~~782~~	Do of Plastering the floor ~~Sq. ft Flooring with concrete 6" thick well rammed & plastered~~ with portland cement	6	0	0	do	55	"	0			
24·70	Sqrs Tiled roofing with Mangalore ½" thick tiles including teak reepers &c.	14	0	0	do	346	–	–			
152 ~~158½~~	C.ft jungle wood wrought & put up	1	12	0	Cft	266	–	–			
	Beef Stalls										
·420 ~~617~~	Units ~~C.ft~~ Earthwork excavation	2	14	3	1000 Cft	1	"	"			
·562	do Filling in	0	9	3	do.	"	"	"			
1·90	Do Concrete in mortar	14	0	0	100 Cft	27	"	"			
8·80 ~~671~~	do Brickwork in ~~chunam~~ mortar	24	0	0	do	211	–	"			
10·50 ~~1061~~	Sqrs Plastering with ~~chunam~~ mortar two coats	2	8	0	100 Sqft	26	"	"			
4·70 ~~399~~	Do of Plastering the floor ~~Sq. ft Flooring with concrete 6" thick well rammed & plastered~~ with portland cement	6	0	0	do.	28	"	"			
13·20 ~~1211~~	Sqrs Tiled roofing with Mangalore ½" thick tiles including teak reepers	14	0	0	do	185	"	"			
78 ~~113⅓~~	C.ft jungle wood wrought & fixed	1	12	0	Cft	137	"	"			
						13016					

Grand Total of Estimate

Office of Sanitary Engineer to Government,
Fort St. George, 25 Oct 1895.

Sanitary Engineer to Government.

Office.

S. E./18 20-5-95-500.

Abstract of Detailed Estimate No. , dated , for the construction of a Vegetable Market at Ellore

Quantity.	Description of Work.	Rate.			Per	Amount			TOTAL.		
		RS.	A.	P.		RS	A.	P.	RS.	A.	P.
						13016	0	0			
	Compound Wall										
6.500 Units ~~6582~~	C. ft of Excavation	2	14	3	1000 Cft.	19	"	"			
184.00 ~~18278~~	Do Brickwork in chunam mortar	24	0	0	100 Cft	4416	"	"			
188.	Sqrs Plastering with chunam mortar 2 coats	2	8	"	100 Sqft	472	"	"			
	Drain										
7.300 Units ~~7264~~	C. ft of Excavation	2	14	3	1000 Cft	21	"	"			
6243	Do Brickwork in chunam mortar	24	0	0	100 Cft.	1498	"	"			
22.70	Sqrs Plastering with chunam mortar 2 coats	2	8	0	100 Sqft.	57	"	"			
504	Sq. ft Slab stones	20	0	0	-do-	101	"	"			
8	Wooden Gates	20	"	"	Each	160	"	"			
2	Latrines as per standard design No. 7	400	"	"	Each	800	"	"			
	Petty Supervision —					600					
	Contingencies —					840					
									22,000		

J C Lawrence
Superintending Engineer
1st Circle.

Grand Total of Estimate Rs. 22,000 " "

Chd
A.P.
12/8/96

14/8/96

OFFICE OF SANITARY ENGINEER TO GOVERNMENT,
Fort St. George, 25 Oct 1895.

pr Sanitary Engineer to Government.

Constructing a Market
at Ellore.
Amount of Estimate Rs 22,000

29 JUN. 93

4/2990 M of 96

Ellore Municipal Office.

Dated the 31st October 1896.
Despatched

Local & Municipal Dept.
CU[illegible] 2990 M

No. 452

FROM,

M-R-Ry.

C. SITARAMAYYA PANTULU GARU;
CHAIRMAN,
MUNICIPAL COUNCIL, ELLORE.

To,

The Chief Secretary to Government
Fort Saint George
Madras.

Sir,

With reference to G. O. D/ 3-8-96 No. 1283 M. Mis;
I have the honor to Submit the enclosed application
for a loan of Rs 25,000 for the construction of Municipal
market for the Ellore Town. I may state here that the
Actuals for 1895-96 were adopted from the Draft Admi-
-nistration report which is before Government for approval.

2. As the Land acquisition statement cannot be Submitted
until the loan application has been Sanctioned,
— I request that you will be pleased to place the
Same before Government for early orders.

3. An extract from the proceedings of the Council
dated 21-10-96 together with plans* and estimates* duly
approved is herewith Submitted.

* Please kindly return.

4. As the Administration report is received on 23-10-96,
Correct figures are now adopted in the Application.

I have the honor to be
Sir,
Your most obedient servent

C. Sitaramayya.
Chairman.

From

The Chairman

Municipal Council

Ellore.

To

Dated

Despatched

Received

Encls:

No.

Subject.

Reference.

Local & Munl. (1896) Department.

3339/M

CURRENT No. ~~525~~

AAS

Order.

Recorded

[illegible]

From

The Chairman

Municipal Council

Ellore

LOCAL & MUNICIPAL DEPARTMENT * SECRETARY TO GOVERNMENT * 15. DEC. 1896

No. 525

Dated 7—12—96

Received 16-12-96

Registered 16-12-96

Enclosures 1

Spare copies

SUBJECT:

Informing that ~~I thought it~~ it was considered to be unnecessary to obtain sanction of the Sanitary Board for the plans & Estimates of market as they were seen by the Board only.

6/1 a 14/1

11k 16/12

BACK PAPERS.

G.O.	No.	Department.	Date.
Memo	1329/96.		
Go	1629	M	23-9-96
Go	1698	L	18-9-96
Go	684	Financial	10-10-96
Go	1283	M	3-8-96
Go	472	M	19-3-96
Go	1678	M	17-9-96

~~FURTHER~~ PAPERS.

G.O.	No.	Department.	Date.
Go	926	M	20-7-94
Go	322	L	8-2-89

Dated Municipal Office.

Despatched 5 . . 96

LOCAL & MUNICIPAL DEPT.
CURRENT No. 3339 M

No. 525 FROM,

M-R-Ry.

C. SITARAMAYYA PANTULU GARU;
CHAIRMAN,
MUNICIPAL COUNCIL, ELLORE.

To,

The Secretary to Government
Local and Municipal Department.

Sir.

With reference to your memo No. 1329/18-11-96 and reminder thereon No. 1457/4-12-96, I have the honor to inform you that, as the plans & Estimates for the construction of market referred to therein were forwarded to this office by the Engineer, Sanitary Board, it was considered unnecessary to obtain sanction of the Sanitary Board on the presumption that they might have been approved of by the Board before they were sent to this office

I have the honor to be
Sir,
Your most obedient servent

Chairman, dep.

FROM

The Chairman

Municipal Council

Ellore.

To

Dated

Despatched

Received

Encls:

No.

Reference.

Subject.

---

e Referencer.

190

te returned.	Initials of attender.
08	

1-4-08
15-3-96

FROM

Municipal Council
Ellore.

No.

AGAIN G.O., No.
189

DATED

given for copying
copied
examined

189

Paper taken out of the Records from the charge of the Referencer.

~~Press~~
Miscellaneous
Routine
No. 602, dated 27-1-97 190 .

Date taken out.	For what purpose.			Initials of clerk taking the paper or of attender.	Date returned.	Initials of attender.
	Department.	C. No.	Year.			
15/3/06	M	305	06		6-1-08	
1-4-08	M	1493	08		28/10/08	