

[L. & M.]
[1/10/99-5-4-10.]

Local & Munl. (1899) Department.

MISCELLANEOUS.

G.O., No. 1538 L

DATED 7-8-99.

INDEXED. DEPARTMENT

[Despatch Abstract.]

Anmarudai Shitteri Tank

Communicating to the District Board
North Arcot, L.D. P.W.D. sanctioning the execution
by the Public Works Dept. of the contribu-
tion work of improving the —, in the
North Arcot District.

BACK PAPERS.


G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.

FURTHER PAPERS.

G.O.	No.	Department.	Date.	G.O.	No.	Department.	Date.

IRRIGATION.

Government {1899} of Madras. PUBLIC WORKS.

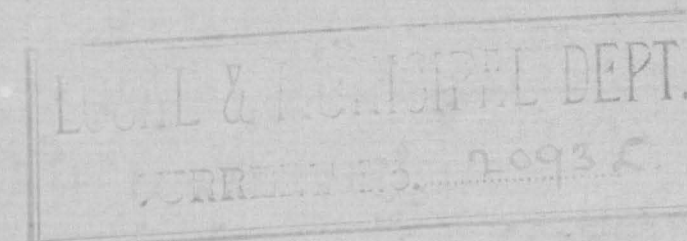

Recd. 25 JUL 1899 }
Regd. 25 } 1899.

Enclosures

Spare copies

G.O., No. 591 I., 14th July 1899.

2/21/99
order 10 153 82nd
7.8.99
Communicated to the District
Board, North Arcot.

JULY.

28/7/99

28/7/99

or Sec.
To the Dist & Bd N. Arcot
supd 28/7/99

Anmarudai Chitteri Tank

The execution by the Public Works Department of the contribution work of improving the —, in the North Arcot district, sanctioned.

27/7/99

No. 591 I., 14TH JULY 1899.

GOVERNMENT OF MADRAS.
PUBLIC WORKS DEPARTMENT.

Irrigation.

READ—the following paper :—

From A. H. GARRETT, Esq., Superintending Engineer, IV Circle, to the Chief Engineer for Irrigation, dated Coimbatore, 17th June 1899, No. 145/I.

I have the honour to submit, herewith, for sanction of Government as a contribution work, the plans and estimates, amounting in all to Rs. 1,400, for repairs and improvements to Annarudai Chitteri tank in Wandiwash taluk, North Arcot district, and to state that the Local Fund District Board is prepared to pay its share of contribution, viz., Rs. 300,* for the portion of the road which carries the Arni-Wandiwash road.

* For earthwork	...	...	...	Rs.
„ vented weir	...	...	...	100
				200
				300
				—

ENCLOSURE.

Report on estimate for repairing Annarudai Chitteri tank.

This tank is situated to right of the road from Arni to Wandiwash at the 30 $\frac{1}{4}$ mile and part of the bund carries the road.

It was almost ruined by the late floods, which came over the low bund at the right flank and washed the whole bank nearly away. It is to be repaired under this estimate.

It was at first proposed to raise the bund to 3 feet above the H.F.L. of the river, but as these floods occur at very long periods (14 years) from one another, it was thought better to risk another breach than go to the expense (about Rs. 3,200 in all) of raising it out of reach of floods. Besides, it is intended to make arrangements at the anicut which will make such damage almost impossible.

Surplus.—The tank has no surplus escape and has no catchment but its own waterspread and a few acres above it; an escape into the river above the road will be dangerous should the river rise to even normal floods; so it is proposed to provide a culvert where the present H.L. sluice is making up 9 $\frac{3}{4}$ feet of escape which will be ample provision.

Sluices.—There is an H.L. sluice with sill 6 inches below F.T.L., which is hardly worth keeping. If such a vent is wanted, it can be provided in making the escape without increasing the cost.

The low level sluice is in good order. Work to be carried out in strict accordance with standard specifications.

5th January 1899.

(Signed) S. AINLEY,
Sub-Engineer.

ORDER—No. 591 I., dated 14th July 1899.

The execution by the Public Works Department of the work referred to is sanctioned.

(True Extract.)

J. H. M.
Under Secretary to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.

- „ Superintending Engineer, IV Circle, with seven enclosures.
- „ Examiner, Public Works Accounts.
- „ Local and Municipal Department.

Exd. T. K. Narayana Aiyangar.

When given for copying _____
When copied _____ 189
When examined _____
When signed _____

READ AGAIN G.O., No. _____, DATED _____
189 .

CURRENT No.

ENCLOSURES TO G. No.

ORDER OF GOVERNMENT

LETTER OF GOVERNMENT.

STATEMENT WITH DITTO.

PAPERS NOT FILED UP, BEING MEANT FOR DESPATCH
IN ORIGINAL.

N.B.—

- A = Copy in full.
- B = Not to be copied.
- P = Copy abstract only.
- Q = Copy heading only.