

(1) Number of pages _____

(2) Date of repair _____

(3) Initials of the Referencer _____

MADRAS RECORD OFFICE.

Government of Madras.

Public Works DEPARTMENT.

G.O. No. 28	Press ~~Mis.~~
61-62	
Dated 6-1-	18 64.

Not to be folded or roughly handled

*Proceedings of the Madras Government, Public Works Department,
6th January 1864.*

No. 61. Read the following letter from Lieutenant-Colonel A. J. M. BOILEAU, R. E.,
Superintending Engineer, 4th Division, to Colonel C. A. ORR, R. E., Secretary
to Government, Public Works Department, dated Madras, 17th December 1863,
No. 4,098 :—
Sir,

1. In September 1855 an Estimate amounting to
Rupees 3,353 was sanctioned by Government for the restora-
tion of the Malapedu Tank in the Madras District, and
Rupees 2,884 had been expended thereon, when the general
stoppage of Public Works took place. It is now proposed to complete the work, but as the
balance Rupees 466 of the original Estimate is not sufficient for the purpose, the accompanying
Estimate Rupees 1,820 has been prepared by the Range Officer.

2. The work has been approved of by the present Acting Collector, and I have the honor
to request that it may be sanctioned for entry in the Budget for 1864-65, provision for the same
having been made in the lists forwarded from this Office on the 31st October 1863.

No. 62. ORDER THEREON, 6th January 1864, No. 28.

The Superintending Engineer, 4th Division, should have
explained fully the causes of the great difference* between the
unexpended balance† of the Estimate sanctioned in Extract
Minutes of Consultation No. 577, dated 24th September 1855, for the restoration of the Malapedu
Tank and the amount‡ of that now submitted; but as the
Government is aware of the considerable increase of rates that
has taken place during the past few years, and allows for the deterioration to which an
unfinished work is liable, authority is granted for the entry in the Budget of 1864-65 of the
estimated cost (Rupees 1,820) / of completing the Tank.
(True Extract.)

(Signed) CHARLES A. ORR, Colonel, R. E.,
Secretary to Government.


To the Superintending Engineer, 4th Division.

„ Accountant General.
„ Controller and Auditor of Public Works Accounts.

Exd. S. T. Augustin.

*Received of Mr. J. W. Hunt
the sum of \$100.00
for the purchase of land*

Recd 28 Sept 1862

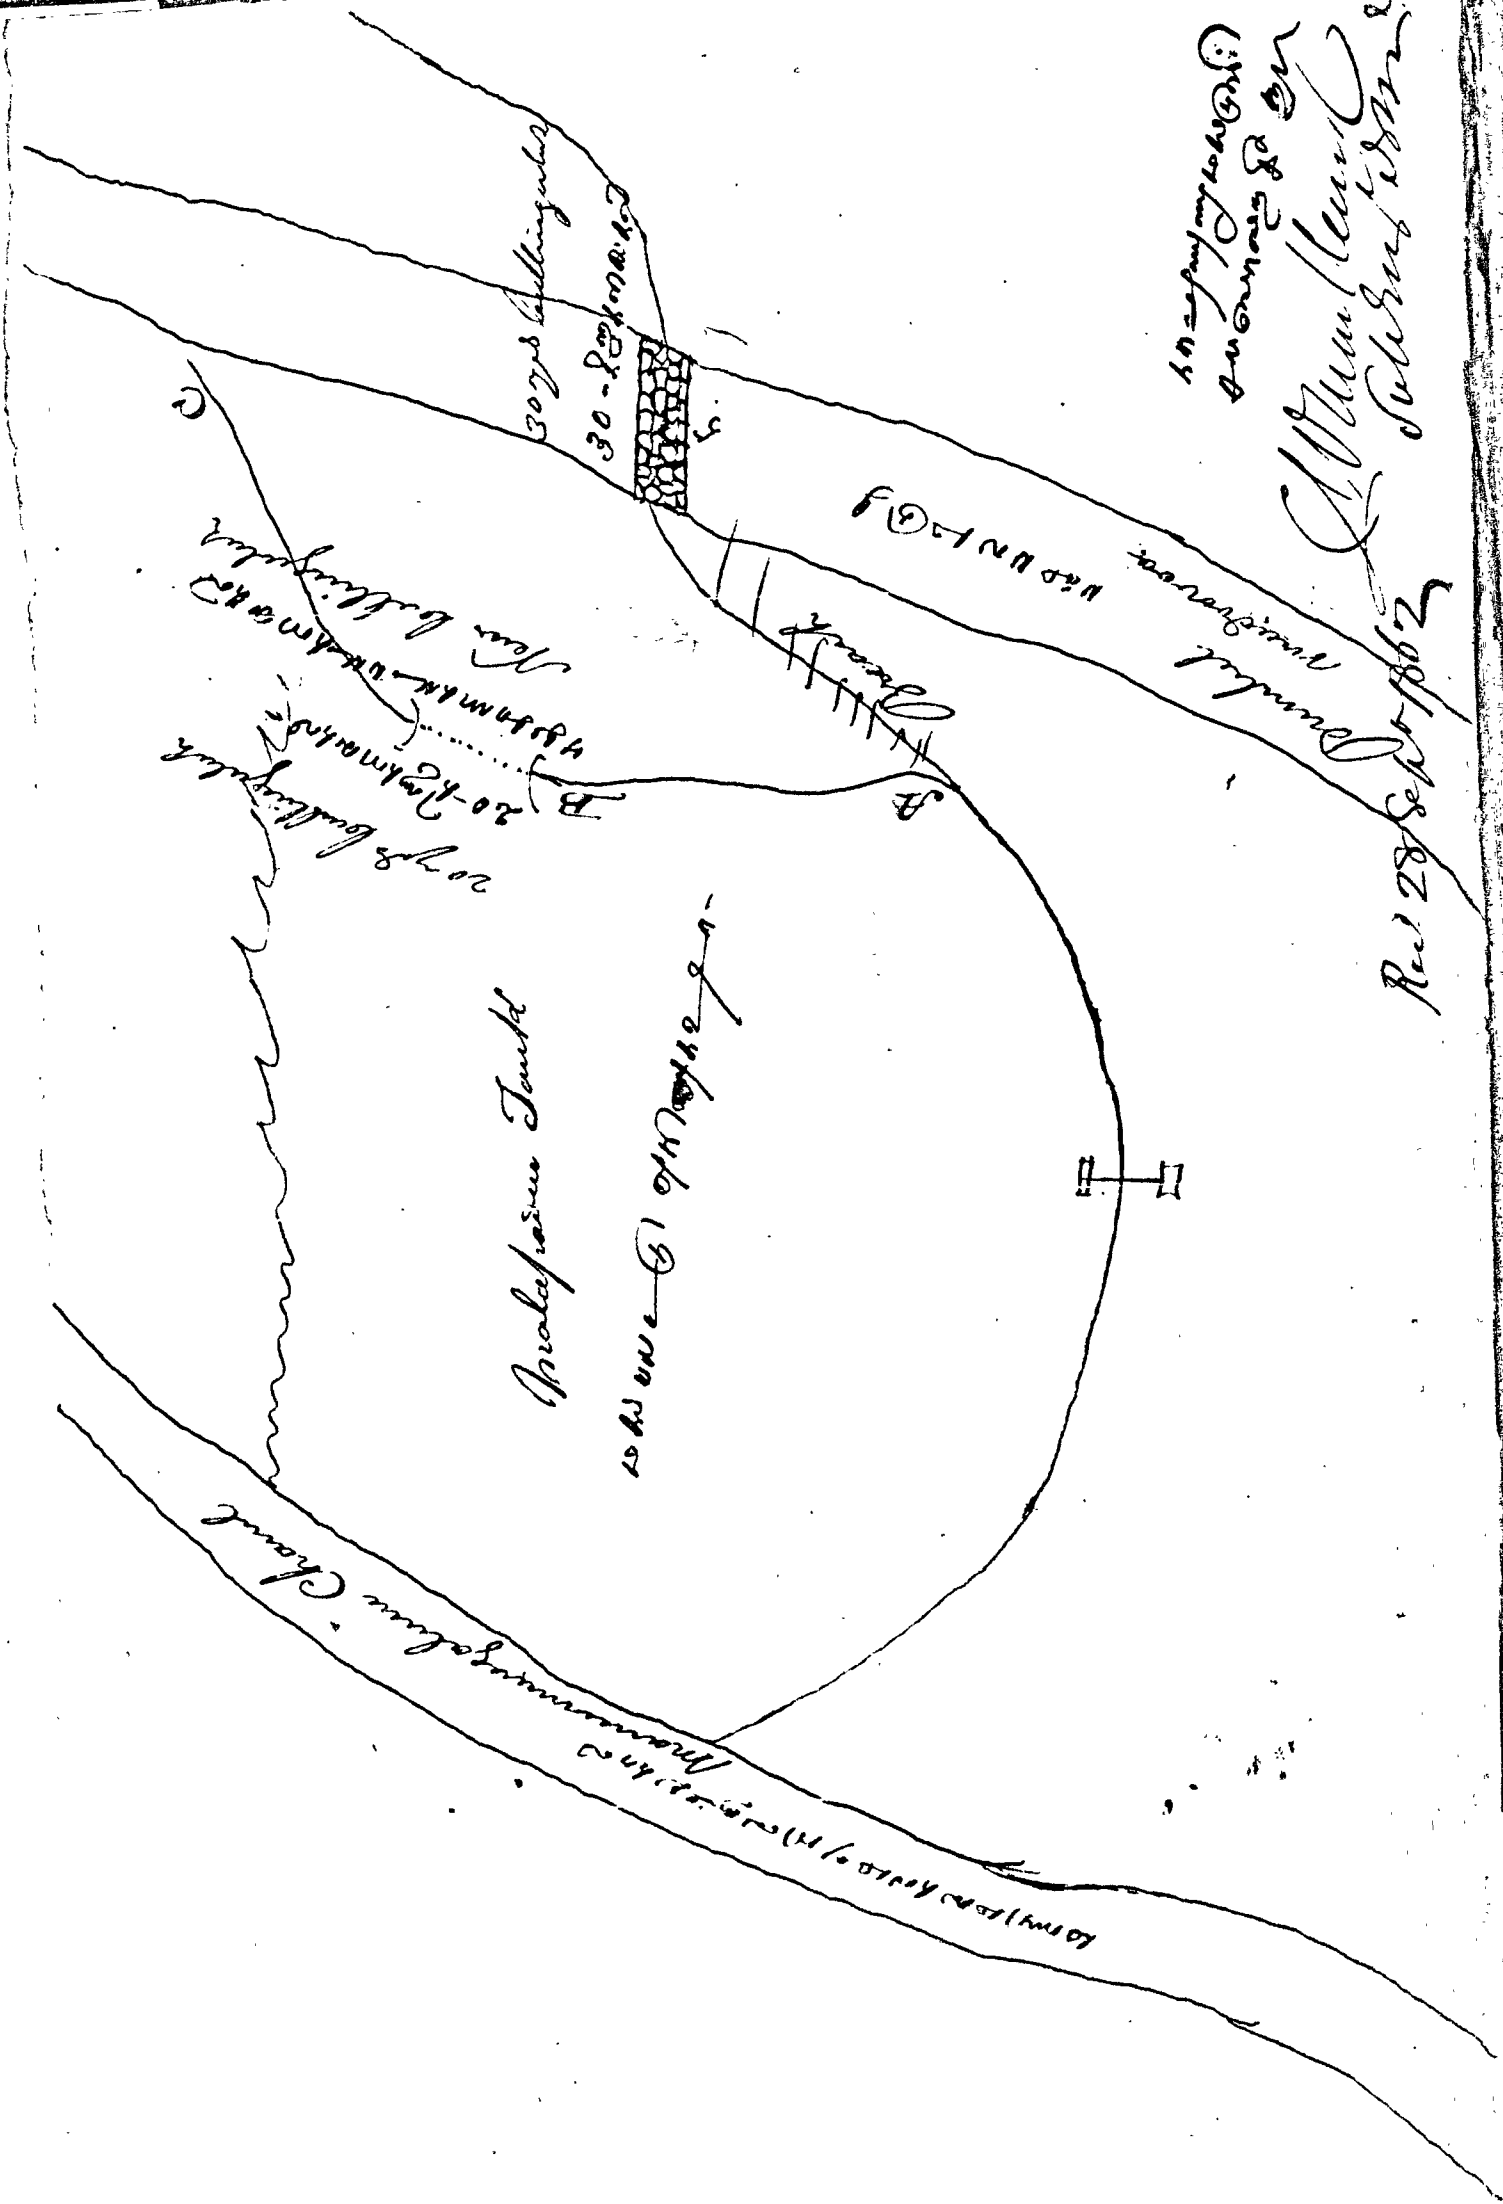

1882/83
Malapadu Tank

REVENUE IRRIGATION

(NEW WORK.)

ABSTRACT of Estimate No.

of 186 -6

DISTRICT *Madras*

TALOOK *Gonjeeveram*

VILLAGE *Malapadu*

WORK *Completing the Malapadu ruined Tank.*

Quantities.	Description of Work.	Rate.			Amount.	Amount of each part.
		Rs.	A.	P.	Rupees.	Rupees.
7271.	bc. yds. of Earth work of bc. yard	"	1	6	682	
21320	sq. yds. of Turfing, of sq. yard	"	"	3	333	
60.	bc. yds. of Rough stone Revetment of cubic yard	"	1	"	15	
165	bc. yds. of New Rough stone Revetment of cubic yard	1	"	"	165	1195.
282	bc. yds. of Rough stone in chumman? of cubic yard	2	"	"	564	
21	Upright stones 1 1/2 feet long each	2	"	"	42	
	Sandries	"	"	"	19.	625
Total Estimate Rupees						1820

Sup. Engr. office 4th Div. }
Madras.
17th Decem 1863

Arman Lieut. Col. R.
Sup. Engineer 4th Division

[illegible]

6707 V 1863 Dyne

Enclosure

In a

From

The Sup^r Engineer
4th Division

9

The Secretary to Government.
D. D. W

Dated

Received. *707 B 288/1*
N.C.

Abstract Estimate for
Completing the Mala-
pedu Tank in the Dis-
trict of Madras Amount-
ing to Rupees-1820.

completing the Tank.
Chepauk
Jan 1864
C.B.

9

•

+ RP 1, 66

* R. 1826

gku

The sup. Geny. & Co. completing the bank.
 1862 coll. sent to the bank.

No 1863 Dyke
 House of Commons
 The Supr. Engrs H^{ch}

To The Secretary to Govt.
 P. W. L.

Dated 17th Decr
 Recd 18th 1863

82 No 4098
 28th - 6th January/64
 Forwards Estimate
 Rs 1820 for completing
 the work connected with
 the restoration of the
 Malipadu Tank in the
 Madras Dist^{ct} and request
 that the same may be
 entered in the Budget
 List of 1864/65.
 With Ans^{rs} & Order

No 61. 82