

(1) Number of pages 8

(2) Date of repair 14-4-44

(3) Initials of the Referencer _____

MADRAS RECORD OFFICE.

Government of Madras.

Public Works DEPARTMENT.

G.O. No. 2565	Press
461-02	Mis.
Dated 28-10-1870.	

Not to be folded or roughly handled

*Proceedings of the Madras Government, Public Works Department,
28th October 1870.*

No. 401. Read the following letter from the Executive Engineer in charge of the 6th Division, to the Secretary to Government, Public Works Department, dated Tanjore, 1st October 1870, No. 562 :—

I HAVE the honour to forward plan and abstract estimate of Rupees 314 for
1 Plan. throwing out a verandah on the west side
1 Abstract Estimate. of the present building of the Moonsiff's

Court at Mannargudy, and for converting it into two rooms, one measuring 8 feet by 8 feet, for securing attached property, and the other an additional record-room measuring 21 feet by 8 feet; the want of this accommodation is very much needed, and in token of his approval the Civil Judge has countersigned the estimate. If sanctioned, funds can be provided for the work from the allotment for "Minor New Works, Civil Buildings."

No. 402. ORDER THEREON, 28th October 1870, No. 2,565.

CIVIL WORKS, No. 43.

SANCTIONED, funds being provided
from the source indicated in this letter.

(True Extract.)

Civil Building 6th Division Minor New Work
Tanore District
Nannarendy Talug or No. 5 Range
Abstract Estimate No. 11 of 1870-71.

Work For throwing out a verandah on the
 North side of the Municipals Court house and
 converting it into two rooms

Quantity	Description of Charges	Rate	Amount	Amount of each part.
1150 $\frac{7}{8}$	Cft. of Brick in Chunanu — at . 2 .		143 13 9	
804 $\frac{1}{4}$	Supl. ft. of Plastering with Chunanu at . 2 .		16 1 4	
45 $\frac{1}{2}$	Cft. of Country wood wrought and put up at . 18 .		6 10 .	
420	Suplft. of Roofing with Palmyrah rafters reapers. nails flat and pan tiles and Chunanu borders — at . 20 .		84 " .	
2	Country wood doors with framed Iron works complete 6' x 3' each — at . 10 .		20 " .	
1	Do. — Do. Windows with frame wooden bars Iron works complete 5' x 3' — at . 7 .		7 " .	
75 $\frac{3}{8}$	Cft. of Brick work in Chunanu for columns — at . 26 .		11 8 1	
81 $\frac{3}{4}$	Suplft. of Plastering with Chunanu — at . 2 .		1 10 2	
265	Do. of Roofing Thatched shed with Bamboos rafters reapers Kicks and with Velut. grass — at . 3 .		7 15 2	
2	Cft. of Country wood wrought and put up at . 18 .		3 " .	
1	Couple with Palmyrah wood —		" 12 "	
	Sundries, Contingencies and Excavation —		11 9 6	

Total Estimate Rupees — 314 . .

Supr Engrs Office 6th Divn
 Tanore 10th August 1870.

Signed / R. E. Khan
 Supervisor D.P.W.

M. K. Thani
 Asst. Civil & Supt. Engrs

W. F. Wake
 Captain R. E.
 Super. Engineer 6th Divn.

No. 562

Superintendent
Bangalore 1st October 1870.

From, Captain P. Montgomerie R.E.
Executive Engineer in charge


To, Colonel C. C. A. Orr R.E.
Secretary to Government P.W.D.

Sir, I have the honor to forward Plan
and abstract Estimate of Rs. 314
for throwing out a Veranda on the west
side of the present building of the
Munsiff's Court at Manargudy and for
converting it into two rooms one measuring
8' x 8' for securing attached property
and the other an additional record
room measuring 21' x 8' the want of this
accommodation is very much needed
and in token of his approval the
Civil Judge has countersigned
the Estimate. If sanctioned
funds can be provided for the
work from the allotment for
Minor New Works Civil
Buildings

Office No. 3901/70

"Buildings".

I have the honor to be
Your most Obedt. Servt.
Wm. H. Allen Capt. U.S.
Executive Engineer in Charge.

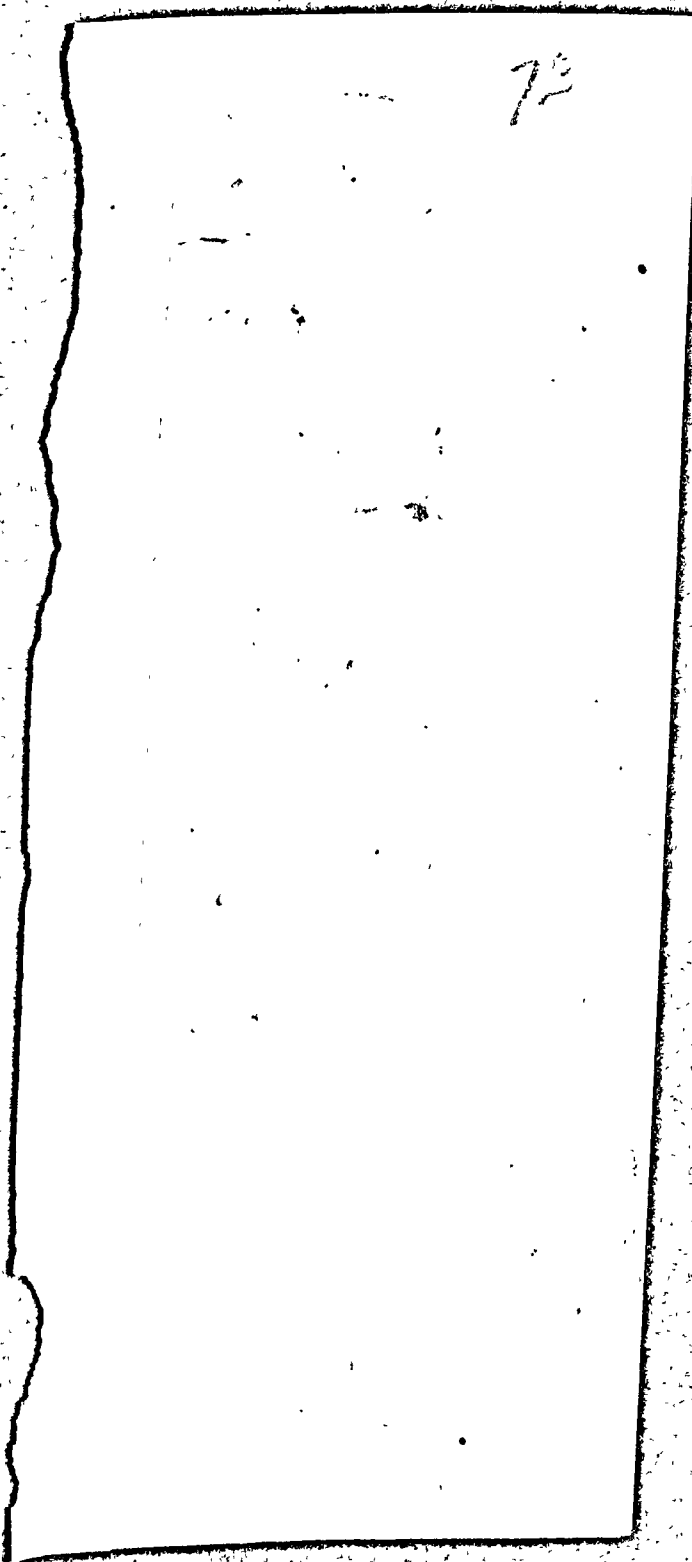

72

Confidential Key 28, 1900

W.H.A.

N

in this letter.

28° 25' 56" N

For the same reason, being no
indicated from the source in the
in this letter.

28° 25' 56" N

Mr 1670 Wells

June 11, 1890

The Corporation of the

in charge - C. B. B.

to the Secretary to the

United States

June 31, 1890

No 28, 1900

28° 25' 56" N

For the same reason, being no

indicated from the source in the

in this letter.

For the same reason, being no

indicated from the source in the

in this letter.

Ct 3901
Govt. of 1870: 30th Dec.

PUBLIC WORKS.

To the Superintendent Engineer
1st Division

Dated

Recd.

2

G. O. 28th Oct. 1870. No 2565.

Nos. 409 402

Rooms. The estimate of Rs. 314
for adding two rooms to the
District Magistrate's Court
House at Managady in
the Tanjore District, sanc-
tioned.