M.R.O. 1—77,606—8-6-37.

(1) Number of pages _____

(2) Date of repair _____

(3) Initials of the Referencer _____

# MADRAS RECORD OFFICE.

---

## Government of Madras.

Public DEPARTMENT.

G.O. No. 2945 Press ~~Mis.~~
380-381.

Dated 21- 11- 1871.

***Not to be folded or roughly handled***

*Proceedings of the Madras Government, Public Works Department, 21st November 1871.*

No. 380. Read the following letter from the Superintending Engineer, 8th Division, to the Secretary to Government, Public Works Department, dated Madura, 3rd November 1871, No. 2,817:—

I HAVE the honour to submit, for the sanction of Government, a plan, specification report, and estimate of Rupees 180, for constructing a temporary thatched building at Pereacolum, Madura District, for the use of the Tahsildar and his office, and to report that the Tahsildar's present Cutcherry is in such a dilapidated condition that it is impossible to put it in good order except at a very great expense, which will not now be necessary, as the construction of a new Cutcherry at that place has been sanctioned in G. O., No. 1,803, dated 7th July 1871.

1 Plan.
1 Estimate.
1 Specification Report.

2. I therefore recommend that the small outlay now required to provide the temporary accommodation which is indispensably necessary may be authorized from the current year's grant of Rupees 400, in the Provincial Budget, under "Minor New Works, Civil Buildings," for the Madura District.

---

No. 381. ORDER THEREON, 21st November 1871, No. 2,945.

CIVIL WORKS, No. 22. — SANCTIONED.

(True Extract.)

Colonel, R.E.,
*Secretary to Government.*

To the Superintending Engineer, 8th Division, with Specification.
" Controller of Public Works Accounts.
" Judicial Department.

Exd. S. T. Augustin.

# Govt. of [1871] Madras

## PUBLIC WORKS.

*To*

THE SUPERINTENDING ENGINEER,

8TH DIVISION.

&c., &c., &c.

*Dated November 21st,*

*Read.* *Encl.*

*G. O., 21st November 1871, No. 2,945.*

**NOVEMBER**

**Nos. 380-381**

*Building.*—The plan and estimate constructing a temporary building for use of the Tahsildar's Cutcherry at Pe: colum, Madura District, sanctioned.

No. 2817

Superintg. Engrs. Office 8th Div.
Madura 3rd November/71

From

Lieutt. Col. R. A. Roberts R.E.
Superintg. Engineer 8th Div.

To

Colonel J. Carpendale R.E.
Secretary to Govt. P.W.D.

Sir,

Enclosures—3.
1. Plan
1. Estimate
1. Specification Report.

I have the honor to submit for the sanction of Government, a Plan, Specification Report, & Estimate of Rupees 180, for constructing a temporary thatched building at Peracolom, Madura District, for the use of the Tahsildar & his Office, & to report that the Tahsildar's present Cutcherry is in such a delapidated condition that it is impossible to put it in good order except at a very great expense, which will not now be necessary as the construction of a new Cutcherry at that place has

has been sanctioned in G. O. No. 1803 dated 7th July 1871.

2. I therefore recommend that the small outlay now required to provide the temporary accomodation which is indispensably necessary may be authorized from the current years grant of Rs. 400 in the Provincial Budget, under "Minor New Works Civil Buildings" for the Madura District.

I have the honor to be,
Sir,
Your most Obedient Servt.
Richd. Robertson Lieut. Col. R.E.
Superintending Engineer
8th Division

New Works. 63

Civil Buildings

Detailed Estimate No 1 of 1871/72

District Madura Taluk Periacolum.

Work—Constructing thatched temporary Court House proposed to be built for the Tahsildar at Periacolum.

| Particulars of work. | Measurements in detail and inches | | | Contents. |
|---|---|---|---|---|
| | Length | Breadth or thickness | Depth or Height | |
| | | | | |
| Foundation to walls of the Building | 118 | 2½ | 2 | 590 |
| Basement to ——— Do | 118 | 2 | 2 | 472 |
| Walls above | 118 | 1½ | 8 | 1416 |
| Total Cubic feet | | | | 2478 |
| Deduct for 1 Doorway | 4 | 1½ | 6 | 36 |
| Do on account of tile in cross Coubwork | 77 | 1½ | 3 | 346½ |
| Do for 3 Posts | 1¾ | 12 | " | 98 |
| Total Deduction C. feet | | | | 479½ |
| Remaining C feet Rud work | | | | 2003½ |
| Or Cubic Yards | | | | 74¼ |
| Steps including foundation | 8 | 5 | 1½ | 55 |
| Total Cubic yards Rough stone in Rud. | | | | 1¾ |
| Plastering basement & steps outside | 126 | 2 | " | 252 |
| Do ——— over Cubs | 15 | 3 | " | 30 |
| Do ——— walls Exterior | 124 | 5 | " | 620 |
| Do ——— do Interior | 112 | 5 | " | 560 |
| Total Plastering Sq. feet | | | | 1462 |
| Deduct for 1 Doorway | 4 | 6 | " | 24 |
| Total deduction Sq feet | | | | 24 |
| Remaining Plastering with Rud Sq feet | | | | 1438 |
| Or Squared | | | | 143 |

Flooring building ____ 46 | 10 | a | 460

Total Flooring with felling in Mud ____ 460

Do Square ____ 4 60/100

Roofing ____ 73½ | 10½ | ____ | 771 3/4

Do ____ 1/3 | 4 | 5a | 357 3/4

____ 33½ | 10½ |

Total Thatched Roofing Square feet ____ 1175½

Do Square ____ 11 3/4

## Wood work

Tali plates two feet in walls ____ 127 | 1/3 | 1/4 | 10 7/12

2 Diagonal beams in the centre of Hall ____ 36 | 1/3 | 5/12 | 5

1 do beam in the Hall ____ 13 | 1/3 | 5/12 | 129/36

2 Uprights ____ 12 | 1/4 | 1/3 | 1

1 Ridge pole ____ 6 | 1/4 | 1/4 | 3/8

Total Jumale wood Cubic feet ____ 18 55/72

1 Sedaca Do ____ " | " | " | 6

10 Jaikgle wood posts each 1 foot Diam.r and 12 feet high ____ 10

Silk Cotton Coir work overhead ____ 77 | " | 3 | 231

Do Do Thatch do. ____ 39 | " | 2½ | 117½

Square feet of Silk Cotton Coir in Chunam 348½

---

New Work. 15


Civil Building

Estimate Chunam &c &c 1871/72.

District Madura Talook Periacolum

Work ____ Constructing Spacious Temporary Court House for the Collector for the Talook at Periacolum ____

| Quantity | Description of Work | Rate | Chunam | Total |
|---|---|---|---|---|
| 74 3/4 | C.ft of Mud work ____ | 0 4 0 | 18 | 9 0 |
| 1/3 | Do of Raw Stone in mud ____ | 1 4 0 | 1 | 10 8 |
| 14 1/3 | Square of Flooring with Mud, Cowdung and white washing over ____ | 0 a 10 0 | 8 | 5 4 |
| 4 60/100 | Square of Flooring with Country Broken and earthen Chatties Straight of 6 inches and new Cadjan ____ | 2 4 0 | 16 | 5 7 |
| 11 3/4 | Square of Roofing with Jungle wood Couples Coir Twine Bamboo, reeds and Bamboo mats, grass &c complete | 5 " " | 58 | 12 0 |
| 18 55/72 | Cubic feet of Country wrought wood | 0 2 0 | 4 | 1 8 |
| 1 | Sedacal Door with Frame, hinges &c complete 4 x 3½ | 12 " " | 12 | " " |
| 350 | Square feet of Coir Cotton silk | 0 1 a | 21 | 14 0 |
| 10 | Jumale wood posts 1 foot diameter and 12 feet high ____ | 1 4 a | 12 | 8 0 |
| | Carried Over ____ | | 158 | 119 |

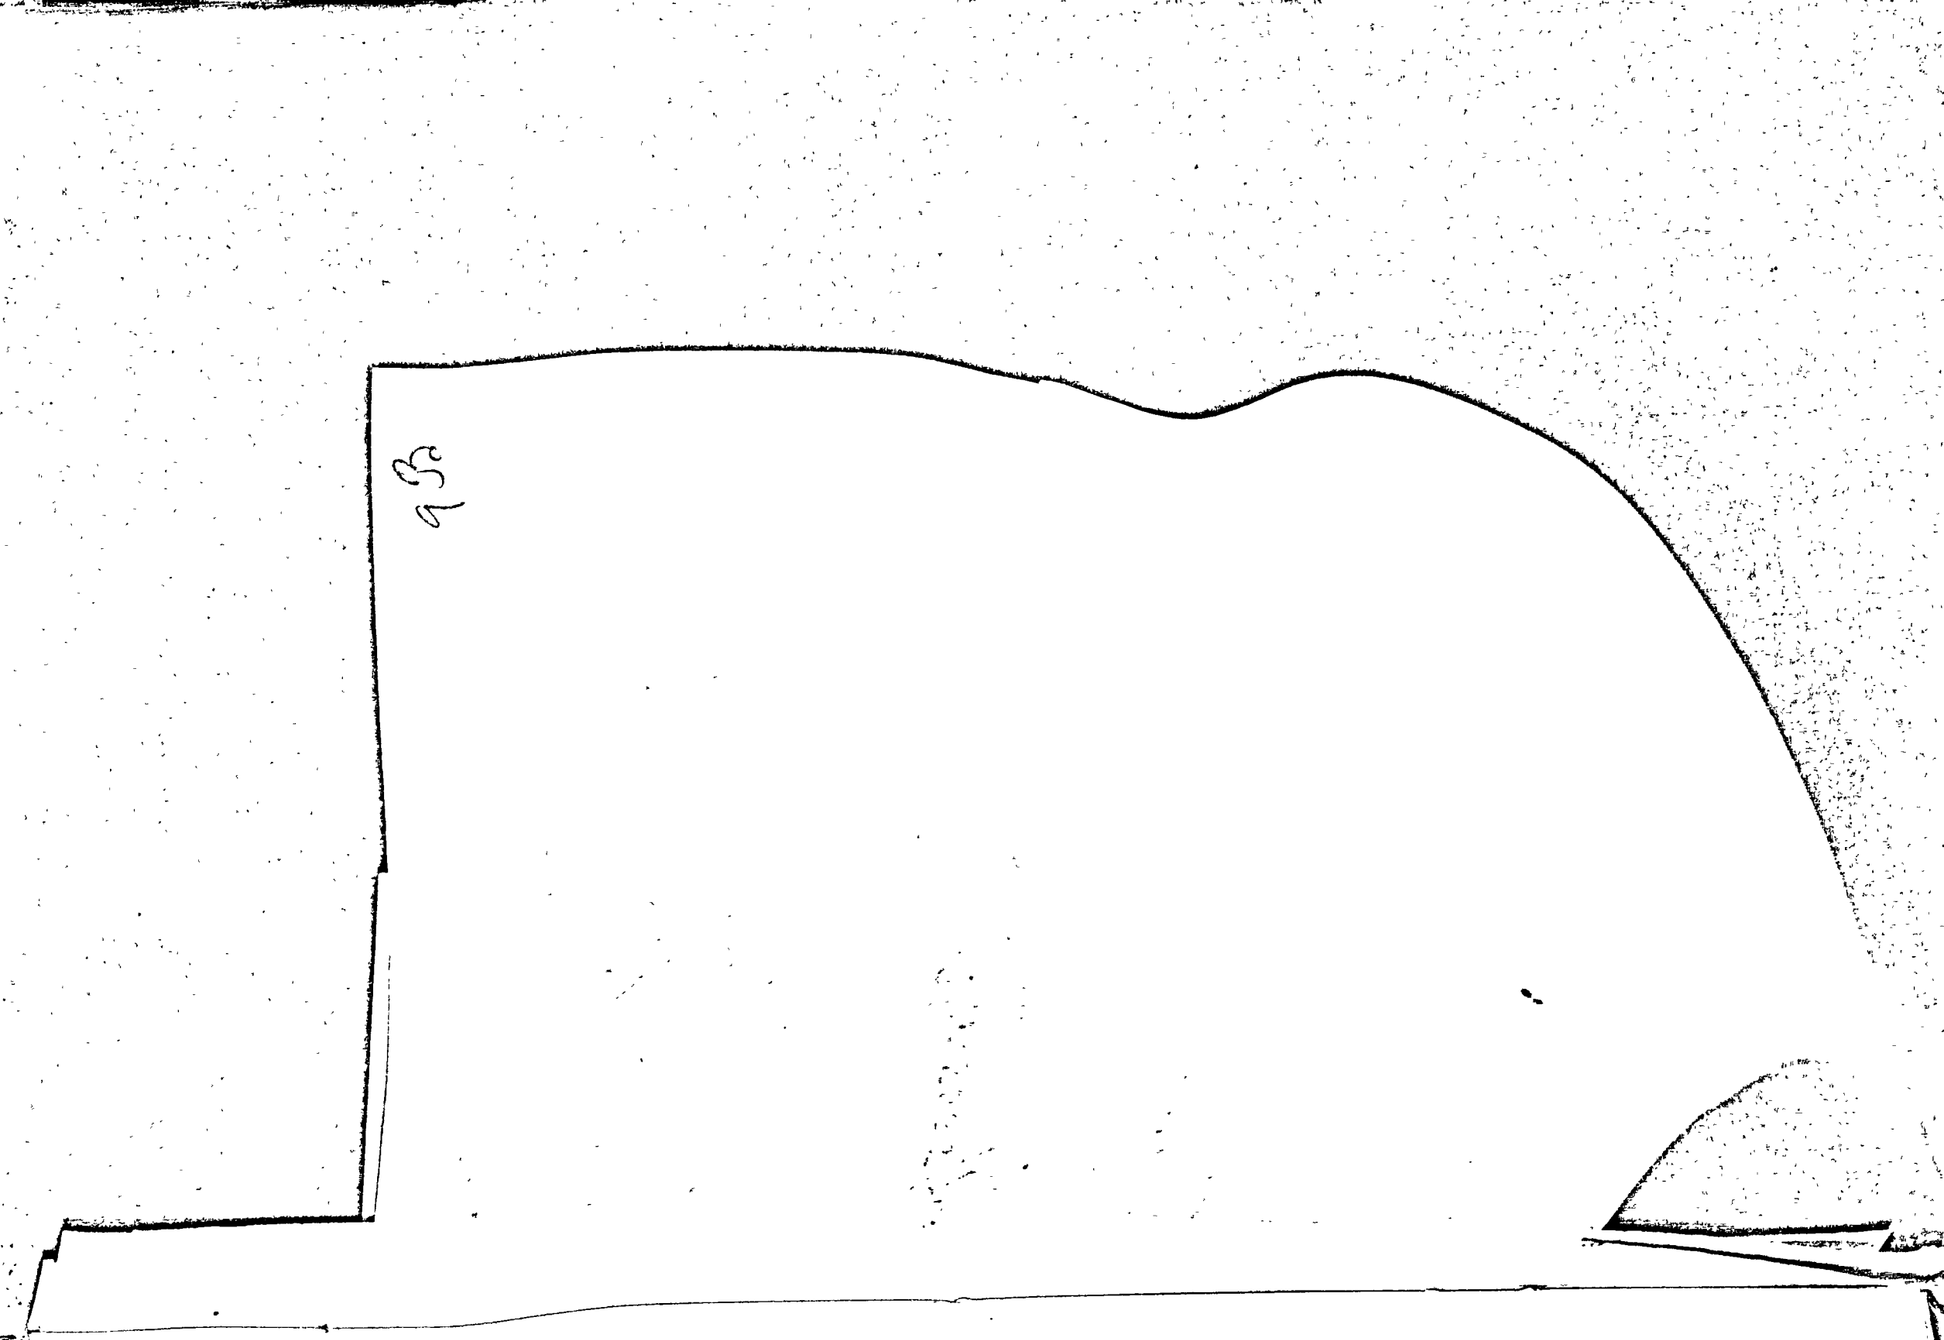


Brought forward. ..... Rs. N.P.

Excavation & Earthwork ..... " "

Sundries and Contingencies ..... " "

Total Estimate Rupees ..... 180 "

Madras
26-9-71

Approved
Superintending Engineer 3rd Circle

Executive Engineer
N. Arcot Division

No 140 of 1871-72

Estimate for construction
a thatched temporary Court
house for the Tahsildar
at Peraceolam Rs 180

Enclosure No 2.
In a letter from
the Supg Engr
& Do dated 3
November 1871
No 2817

P. W. 5335/71
Bom. 2 Nov 71 L No 350.

Estimate for
constructing a
temporary build
=ing for the use of
the Tahsildars
Cutcherry at
Peracoolum

Public Works 1871 Department
No. 2617

Dated 3rd } Strembitsky
Received 8th }

From The Supt. Engineer
8th Div.

To The Secretary to Govt.
P. W. D.

Encls 3

Submits for the sanction of Govt. Plan & Estimate of Rs. 180 for constructing a temporary building for the use of the Tahsildar's Cutcherry at Peregaulem.

No. 2945 - 21 Nov 71

Rec'd 25th Nov. 71 No. 105 126

Rs. 180

Copy of Despatch from Executive Engineer, Kistna Division, No. 2945, dated 21st November 1871.

Rec'd 25th Nov. 1871

Govt of Madras.

PUBLIC WORKS.

To the Superintending Engr
S.E. Division

21 Nov 1871 No. 2945

Nos. 382 & 381

Buildings - Plans & estimate for constructing a temporary building for the use of the Labourers Cutcherry at Peraeolum Madura Dt. sanctioned