

(1) Number of pages_____

(2) Date of repair_____

(3) Initials of the Referencer_____

MADRAS RECORD OFFICE.

Government of Madras.

Public works **DEPARTMENT.**

G.O. No.	167	Press
334-335		~~Mis.~~
Dated	18-1-	1873.

Not to be folded or roughly handled

*Proceedings of the Madras Government, Public Works Department,
18th January 1873.*

No. 334. Read the following letter from the District Engineer, Coimbatore, to the Secretary to Government, Public Works Department, dated 11th December 1872, No. 215:—

I HAVE the honour to forward, for the sanction of Government, a revised estimate of Rupees 6,120 with a comparative statement for completing the Subsidary Jail of Collegal and altering the

1 Estimate.

1 Comparative Statement.

latrines thereof (completed on the old design) according to the new design approved of by Government. The original estimate sanctioned for this work in G. O., No. 391 of 6th February 1869 amounted to Rupees 5,550.

2. The net excess of Rupees 570 over the original estimate is chiefly owing to the following causes:—

I.—Alteration of latrines completed on the old design.

II.—Additional wooden battens along the ridge ventilators since found necessary by the Magistrate to prevent prisoners from escaping.

III.—Deterioration of the buildings consequent on the long time they remained in abeyance.

IV.—Insufficiency of rates originally allowed for asphalting, wood work, etc.,

3. The Range Officer anticipated the completion of the work within 500 Rupees, and as it was within the limit of the allotment up to which the Superintending Engineer could authorize the completion of the work, no specific assignment of funds was hitherto applied for in the current year, but now as this limit has been exceeded, I have the honour to request (if funds are not otherwise available) a transfer of Rupees 570 from the assignment of Rupees 3,500, allotted in G. O., No. 1,767, of 25th July 1872, for constructing a Range Office at Collegal to allow of the item noticed in G. O., No. 200 of 25th November 1872, being adjusted.

No. 335. ORDER THEREON, 18th January 1873, No. 167.

CIVIL WORKS, No. 15.

THE revised estimate of Rupees 6,120 is sanctioned. Before approving of the transfer recommended in this letter, His Excellency the Governor in Council desires to be informed whether it is proposed on the ground that the outlay on the Collegal Range Office will fall short of the grant. If not, other funds are available.

(True Extract.)

Colonel, R.E.,
Secretary to Government.

To the District Engineer, Coimbatore.
.. Controller of Public Works Accounts.

Exd. T. O'Connor,

Quantity	Particulars of work	Original Estimate		Revised Estimate		Increase	Decrease
		Per	Rate	Per	Rate		
	Brought Over	391	8 10	522	2 4	130	9 6
"	Other items as per Original Estimate	620	1 9	620	1 9		
"	Sundries at $7\frac{1}{2}$ per cent	68	5 5	85	11 11	17	6 6
	Total	1080		1228		148	
21 $\frac{1}{2}$	Cy of Brick in Mud	4	86	25	4	100	14
18 $\frac{7}{12}$	Cy of Jungle wood wrought & put up	2	37 5 4	18 $\frac{1}{2}$	2 8	46	7 4
	Batten door with frames &c complete	1	15	15	15	15	
"	Other items as per Original Estimate	253	6 3	253	6 3		
"	Sundries at $7\frac{1}{2}$ per cent	31	4 5	32	2 5	14	
	Total	410		449		39	
74 $\frac{3}{8}$	Cy of Brick in Mud	4	247 8	78	4	312	14 8
18 $\frac{19}{24}$	Cy of Jungle wood wrought & put up	2	37 2 2	18 $\frac{1}{2}$	2 8	46	15 8
311 $\frac{3}{4}$	Sy of Asphalt flooring	20	62 5 7	311 $\frac{3}{4}$	30	93	8 5
"	Honey Comb tile works	1	92	10	19	3 2	19 3 2
"	Other items as per Original Estimate	252	10 2	252	10 2		
"	Sundries at $7\frac{1}{2}$ per cent	50	6 1	54	4 7	3	14 6
	Brick in Chumam	37	5	185		185	
	Plastering with Chumam	12 $\frac{3}{4}$	2	25 8		25 8	
	Flooring with jelly in Chumam	1 $\frac{1}{10}$	1	1 17		1 17	
	Covering stones	8	1	8		8	
	Tarring walls	5 $\frac{1}{2}$	1 8	8 4		8 4	
	Removing seats and drains already built as per Original Estimate			15		15	
	Sundries at 5 per cent			14	8 5	14	8 5
	Total	700		1036		336	
	Sinking well and constructing wooden proper &c	150		150			
	Grand Total Rupees	5550		6120		570	
	Deduct the amount already sanctioned as per Original Estimate in G.O. No. 391 dated 6 th Feb 1869	5550					
	The excess amount requiring sanction			570			

District Eng^r Office
Coimbatore
11th December 1872

[Signature]
for the District Engineer Coimbatore

3378
4-12-72

59
Specification of work to be executed
in removing seats ~~see~~ already built
to the new Jail latrine at Collegal,
and rebuilding them according to the
revised plan, modified to suit the
present building.

1. The present seats to be removed
and rebuilt according to revised plan
Two dry earth stores and two urinary
Cisterns to be built.
2. Urner channels and urinary
D^{rs} to be provided, the whole of the
masonry to be of brick in chunam,
and to be plastered in chunam
with 2 coats. The channels,
troughs and bottoms of Cisterns to
be covered with asphalt.
3. The whole of the work to be
executed as per plan and estimate
Submitted.

Collegal Range Office
27th November 1872

M. Munro
Range Officer

2 3 6 2 Batten door with frames key complete 15 " " each 30 " "
 other items as per the Original Estimate " " " 620 19
 Sundries at 7 1/2 per cent 85 11 11
 Total 1228 "

58 1 1/2 cft of Brick in mud as per Original Estimate
 93 Rebuilding top course of foundation
 67 1/2 cft of Brick in mud or 25 cyards 4 " " cft 100 " "
 18 1/2 cft of jungle wood wrought & put up 2 8 " cft 46 7 4
 1 3 6 1 Batten door with frames key complete 15 " " each 15 " "
 other items as per Original Estimate " " " 255 6 3
 Sundries at 7 1/2 per cent 32 2 5
 Total 449 "

2008 1/4 cft of Brick in mud as per Original Estimate
 100 1/2 Rebuilding top course of foundation
 210 9 1/2 cft or 78 cyards of Brick in mud 4 " " cft 312 " "
 18 1/2 cft of jungle wood wrought & put up 2 8 " cft 46 15 8
 35 1/2 " 4 142 } Honey comb tile work
 12 1/2 " 4 50 }
 192 Sft of Honey comb tile work in Chumam 10 " " Sft 19 3 2
 311 3/4 Sft of asphalt flooring 30 " " Sft 93 8 5
 other items as per Original Estimate
 Sundries at 7 1/2 per cent 54 4 7
 Total amount of the Estimate for the works already executed as per Original plan 778 10 "

37 cys of Brick in Chumam utilizing the old material 5 " " cft 185 " "
 12 3/4 Sft of Plastering with Chumam 2 " " Sft 25 8 " "
 1 1/2 " of flooring with jelly in Chumam 1 " " Sft 1 1 7
 8 Covering stones 3 " " each 8 " "
 5 1/2 Sft of tarring the walls & 1 8 " Sft 8 4 " "
 Removing seats & drains already built on the old plan 15 " "
 Sundries at 5 per cent 14 8 5
 Total for Lathier 1036 " "
 Sinking well and constructing wooden props for as per } 150 " "
 original Estimate }

Grand total of the Revised Estimate 6120 " "
 Deduct the amount of the original Estimate already sanctioned as per G.O. No. 391 dated 8th Feb 1904 5550 " "
 Balance requiring sanction 570 " "

District Engineer's Office
 Coimbatore 11th December 1892
 Sd/- District Engineer Coimbatore

N^o 215

District Engineer's Office
Coimbatore 11 December 1872.

From
The District Engineer
Coimbatore.

To
The Secretary to Government
G. P. W. Madras.

Sir,

I have the honor to forward for the sanction of Government a revised Estimate of Rs. 6120 with a comparative Statement for completing the Subsidiary Jail of Collegal and altering the latrines thereof (completed on the old design) according to the new design approved of by Government. The original estimate sanctioned for this work, in G. O. N^o 391 of 6th February 1869, amounted to Rupees 5550.

The net excess of Rupees 570 over the original estimate, is chiefly owing to the following causes:

- I. Alteration of latrines completed on the old design.
- II. Additional wooden battens along the Ridge ventilators since found necessary by the Magistrate to prevent Prisoners from escaping.
- III. Deterioration of the buildings consequent on the long time they remained in abeyance.
- IV. Insufficiency of rates originally.

Enclosures
1 Estimate
1 Comparative
Statement.

[Faint handwritten notes and signatures, including 'The District Engineer' and 'Coimbatore']

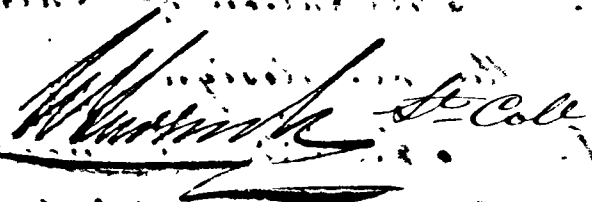
[Faint handwritten signature]

allowed for asphaltting, wood work &c.

The Range Officer anticipated the completion of the work within 500 Rupees and as it was within the limit of the allotment up to which the Supy Engineer could authorize the completion of the work, no specific assignment of funds was hitherto applied for in the current year, but now as this limit has been exceeded I have the honor to request (if funds are not otherwise available) a transfer of Rupees 570 from the assignment of Rupees 3500, allotted in G. O. No 1767 of 25 July 1872 for constructing a Range Office at Colligal, to allow of the item noticed in G. O. No 200 of 25 November 1872 being adjusted.

I have the honor to be,
Sir,

Your most obedt servant,

 W. H. St. Col

For Dist. Supy Coimbatore

True that

1862/72

W

The Revised Statute of 1872 is
 sanctioned. Before approving of the transfer accor-
 -mended in this letter Mr. Secretary the Governor in-
 -quired of the Council whether it is proper
 on the ground that the entry on the College Range
 Office will fall short of the grant. If not, other ways
 are available.

Wm. St. Louis
 Council

Dec 2 21/72

1862/72

Dec 18 72
 Wm. St. Louis
 Council

Dec 18 72
 Wm. St. Louis
 Council

Dec 18 72
 Wm. St. Louis
 Council

Dec 18 72
 Wm. St. Louis
 Council

True

Feb 229
Govt. of 1872 Madras.

PUBLIC WORKS.

To
District Engineer

Dated -

Coimbatore

Recd.

Encl. 2

G. O. 18th Aug 1872. 167

Nos. 334 & 335

Sub Jail at Coimbatore.

Revised Estimate

Rs. 6120 for completing
the sub jail at Coimbatore
altering the latrine
attached to the building
Sanctioned with remarks.