M.R.O. 1—10,006—28-2-50

(1) Number of pages

(2) Date of repair

(3) Initials of the Referencer

MADRAS RECORD OFFICE

Government of Madras

Public works DEPARTMENT

G.O. No. 2173 Press
~~B.P. No.~~ ~~Mis.~~
515/516

Dated 29.8. ~~195~~ 1873

Not to be folded or roughly handled

Proceedings of the Madras Government, Public Works Department,
29th August 1873.

No. 515. Read the following letter from Colonel E. A. FOORD, R.E., Inspecting Engineer for Civil and Military Buildings, to Colonel G. W. WALKER, R.E., Secretary to Government, Public Works Department, dated Chepauk, 13th August 1873, No. 935 :—

I HAVE the honour to submit for the sanction of Government from the current year's grant, under Minor New Works, Military, an estimate of Rupees 117, accompanied by a plan and specification, for certain masonry work required for the General's flag-staff at Bellary; and to state that the plan and estimate have met with the approval of His Excellency the Commander-in-Chief.

1 Plan.
1 Estimate.
1 Specification.

2. The existing masonry pillar for the flag-staff is in a dilapidated state, and its re-construction is necessary to render the staff firm and secure. The work has been undertaken on emergency at the request of the local Military Authorities.

No. 516. ORDER THEREON, 29th August 1873, No. 2,173.

MILITARY WORKS, No. 12.

SANCTIONED.

(True Extract.)

Colonel, R.E.,
Secretary to Government.

To the Inspecting Engineer for Civil and Military Buildings.
,, District Engineer, Bellary.
,, Officiating Controller of Public Works Accounts.
,, Military Department.

Exd. S. T. Austin.

Spare Copies.

"New work" "Military"

ABSTRACT ESTIMATE.

District Bellary Talook Bellary Village Bellary

Work Certain Masonry work required for the General's Flag Staff vide [illegible] Assistt Qr Mr Gl's letter No 1509, dated 1st June 1873.

Quantities.	Description of Work.	Rate.			Per.	Amount.			Amount of each part.		
	Demolishing										
225.	Cft Removing stone in chunam	-	-	3	Cft	3	8	3			
3.	Cyd Rubbish Carted a distance of ¼ miles	-	2	6	Cyd	-	7	6			
8.	Slabs dug up and removed	-	4	-	Cyd	2	-	-			
2.	Cyds Gravel	-	5	-	-	-	10	-			
	Total								6	9	9
	New work										
10.27	Cyds Excavation	-	2	-	Cyd	1	4	6			
0.92	- - Concrete	3	12	-	-	3	7	7			
135	Cft Brick in Chunam	-	4	-	Cft	33	12	-			
1.	Slab (4×4×⅓)	2	-	-	each	2	-	-			
8.	Do (6×1¼×¼)	2	4	-	-	18	-	-			
13.	Lft of Slabs (2¼×⅓)	-	8	-	Lft	6	8	-			
8.	Iron bolts rings nut and washers Complete	5	-	-	each	40	-	-			
30	Sft Plaster 3 Coats	6	-	-	Sqr	1	12	10			
	Total								106	12	11
	Grand Total								113	6	8
	Deduct value of old Materials								2	-	-
	Net value or Balance								111	6	8
	Sundries								5	9	4
	Total Estimate Rupees								117	-	-

Arthur Edgcome Captain R.E.

Bellary 30 July /73

Major

Offg [illegible] Qr Mr Genl Ceded Dts

Colonel R.E.
Inspecting Engineer for
Civil & Mily: Buildings

Brigadr General
Commanding Ceded Dts

Offg Distt Engineer

Bellary Range No 1
Bellary
2d July 1873.

Calculation checked by
Eng. Apprentice

Sub Engineer D.P.W.

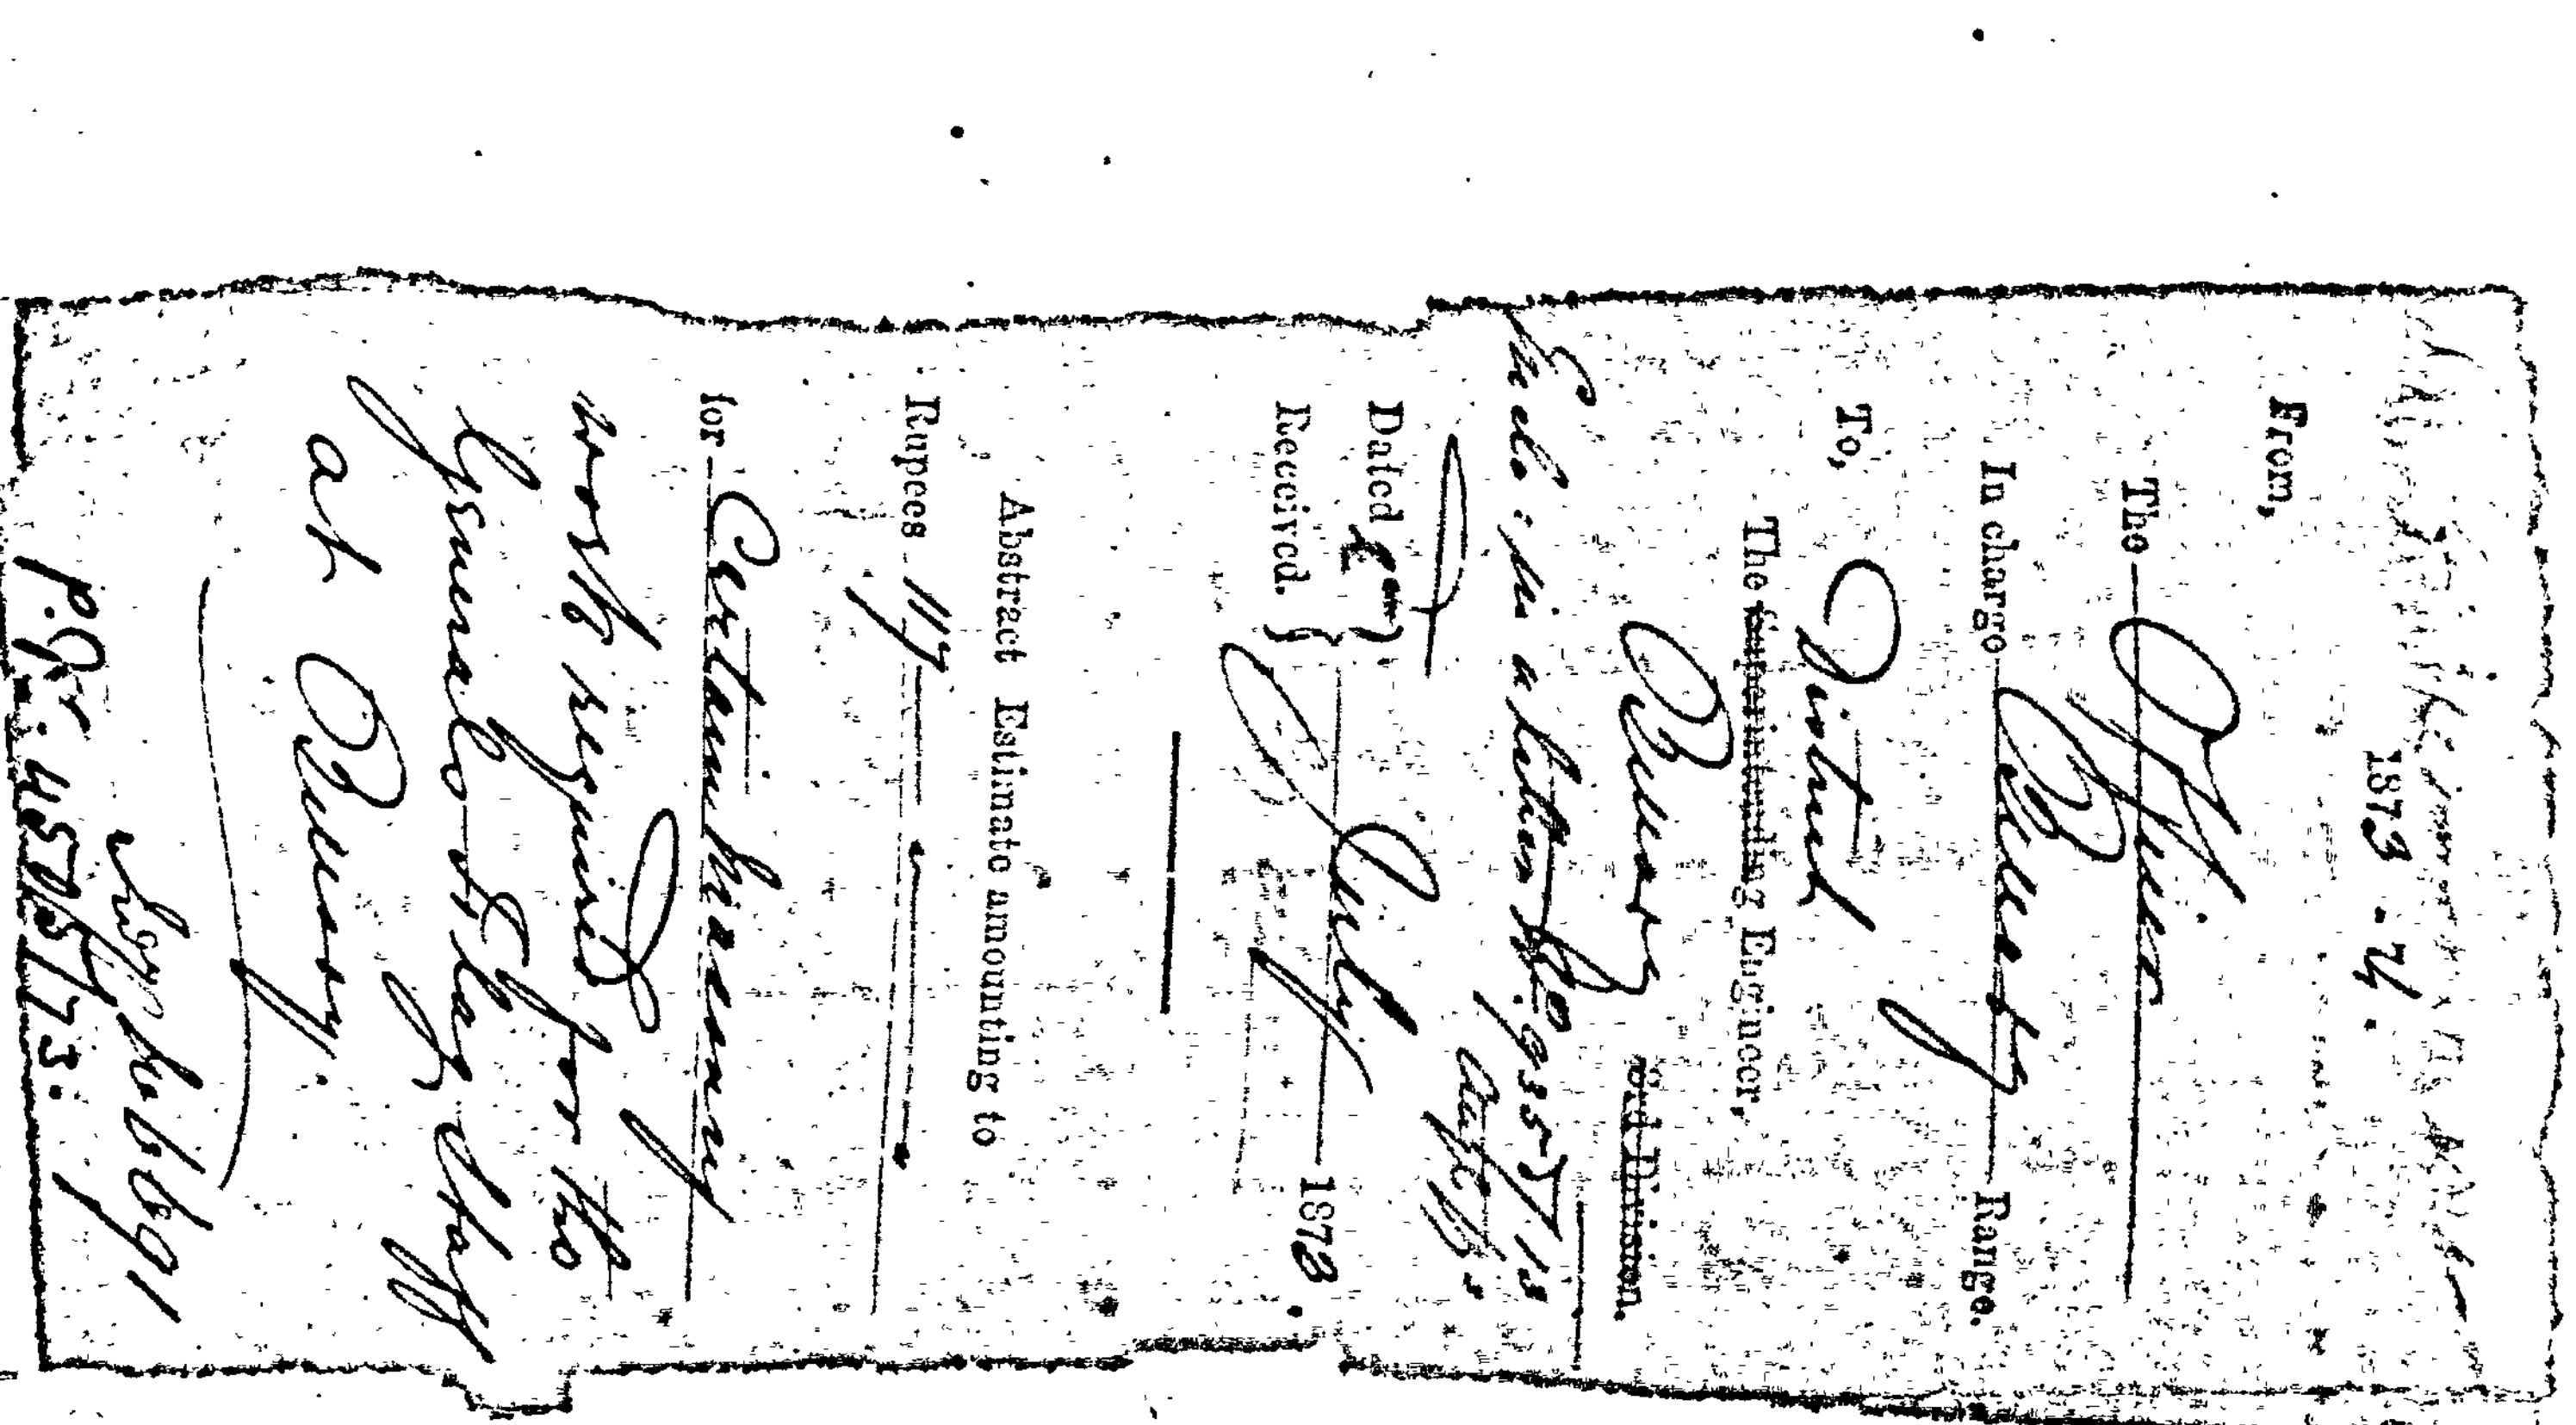

1873-4.

From,

The Officer

In charge Bellary Range.

To,

The ~~Superintending~~ District Engineer,

Bellary ~~3rd Division~~.

[illegible] letter No. 935-7/73

Dated 5th } July 1873.
Received }

Abstract Estimate amounting to

Rupees 117

for Certain necessary works required for the General's Flag Staff at Bellary.

P.R. 4575/73.

Report to accompany the Estimate for removing &c. the General's Flag Staff.

— Amount of Estimate Rupees 117/. —

The old pillar and slabs will be removed, the debris carted away and the ground on which the pillar and slabs stood, will be neatly gravelled.

The new flag staff will be let into the ground to a depth of 4 feet, and will be placed on a square slab (in which a slot will be cut to receive the foot of the staff) resting on 1 foot of concrete; after the staff has been properly fixed by the rigging, brick in chunam 2 feet thick and 5½ feet high, will be built all round it, as shewn in the accompanying sketch; on top of the brick in chunam, slabs 2¼ ft. broad and 4 inches thick will be laid. The part of brick work above ground will be plastered with 3 coats.

Eight slabs (to which bolts and rings for fastening the rigging will be fixed)

will

will set in the ground at proper distances.

The materials are ready, and the work will be Commenced on emergency as soon as the flag staff is prepared by the Ordnance Department.

Wm Jackson

Bussy
2d July 1873.

Sub Engineer D.N.2.

Arthur Edgcome. Captain R.E.
Offg District Engineer

P.R. 4578/73.

Bellary District.

Enclosure in a Letter No. 935 dated 13 Augt./73.

P.W. 4505/73.

Specification Report to accompany the Estimate for removing &c the General's Flag-Staff.

Estimate Rs. 117.

No. 935

Office of the Inspecting Engineer
for Civil and Military Buildings,
Chepauk, 13 August 1873.

From

The Inspecting Engineer,
for Civil and Military Buildings

To

The Secretary to Government
Public Works Department

Enclosures 3.
1 Plan [illegible]
1 Estimate
1 Specification

Sir,

I have the honor to submit for the sanction of Government from the current years' grant under Minor New Works Military, an estimate of Rs. 117, accompanied by a plan and specification, for certain masonry work required for the General's flag staff at Bellary; and to state that the plan and estimate have met with the approval of His Excellency the Commander in Chief.

2. The existing masonry pillar for the flag staff is in a dilapidated state, and its reconstruction is necessary to render the staff firm and secure.

The

The work has been undertaken on emergency at the request of the local Military authorities_

I have the honor to be
Sir.
Your Most Obedient Servant
E. A. Ward Colonel R.E.
Inspecting Engineer for
Civil & Military Buildings

P. W. 1873 Depart.

No. 935

From No. 4505.

The Inspecting Engineer
for Buildings,

To

The Secretary to
Government
P.W.D.

Encls: 3

Dated 13
Recd. 14 Augt. 1873.

Submits for sanction an estimate of Rs. 117. accompanied by plan & specification for certain masonry work required for the General's flag staff at Bellary

L Withan Order

5/6

Sanctioned

No. 2173

Supt. for Buildings
Bellary
Offg. Contr.
Mily. Accts.
/ C 6/9/73

No. 515-516.

C. No. 4505

Govt. of {1873} Madras.

PUBLIC WORKS.

To The Inspecting Engr. for Civil & Military Buildings

Dated

Recd. Encl. 3

G. O. 29 Aug. 1873, 2173.

Nos. 575 & 576

Flag Staff at Bellary

Estimate of Rs. 117 for certain masonry work required for the General's flag staff at Bellary, sanctioned