

(1) Number of pages _____

(2) Date of repair _____

(3) Initials of the Referencer _____

MADRAS RECORD OFFICE

Government of Madras

Public Works DEPARTMENT

G.O. No. 683	(9)	Press
B.P. No.		Mis.
Dated 17.3.		1876.

Not to be folded or roughly handled

*Proceedings of the Madras Government, Public Works Department,
17th March 1876.*

Read the following :—

No. 3 W.

No. 244. *Note by the Chief Engineer for Irrigation.*

THE District Engineer, Cuddapah, forwards, with his letter marginally noted, an estimate in connection with the Ragullah No. 2,304, dated 12th February 1876. Woobrayanu Coontah tank, situated in the Voilpaud Taluq, Madanapully Range.

2. The nature of the work proposed for execution and the heads of account to which it is chargeable are as follow :—

	RS.
Constructing a new Waste Weir	210
Do. do. Sluice	126
Total, Capital, Ordinary, Original Works ..	336
Raising and sectioning the Bund, Revenue Repairs	194
	530

3. The following particulars of this tank are recorded :—

Ayacut area ... 70 Acres.
Assessment ... 302 Rupees.
Average Revenue... 108 „
Highest do. ... 120 „
Expenditure during the previous years. • Not known.

The area of the catchment basin is $1\frac{3}{4}$ square miles; the maximum flood-supply is calculated at 608 cubic feet per second, for discharging which, as surplus, there is a natural escape 45 feet in length which is reported to be insufficient. It is, therefore, proposed to construct a masonry weir, 61 feet in length, on the site of the existing escape. The bund also is reported to be low and weak. The estimate provides for constructing a new weir and a sluice and for raising and sectioning the bund.

FORT ST. GEORGE,
9th March 1876.

(Signed) A. DEC. SCOTT, Major, R.E.,
Dy. Chief Engineer for Irrigation,
for Chief Engineer for Irrigation.

To the Secretary to Government, Public Works Department.

No. 245. ORDER THEREON, 17th March 1876, No. 683.

IRRIGATION, No. 22.

Account.

The following estimate forwarded by the District Engineer, Cuddapah, is sanctioned :—

Raising and sectioning the Bund, constructing a new Waste Weir and a new Sluice.

Capital, Ordinary	Rs. 336
Revenue Repairs	„ 194
	Total Rs. 530

Proceedings of the Madras Government, Public Works Department,
17th March 1876.

2. This sanction has been registered as No. 52 I. of 1875-76.
(True Extract.)

Major-General, R.E.,
Secretary to Government.

To the District Engineer, Cuddapah.
" Collector of
" Examiner of Public Works Accounts.
" Chief Engineer for Irrigation.
" Revenue Department.

I. Form No. 9

OFFICE OF THE CHIEF ENGINEER for Irrigation

For Irrigation, 9 March 1876.

No. 3 W

Note by Chief Engineer for Irrigation.

THE District Engineer, Cuddapah

forwards, with his letter marginally noted, an Estimate in connection

No. 2304
103 12 Feb 76
with the Ragullah Moobrayana fontek Tank situated in the
Vailpand Taluq, Madanapally Range.

2. The nature of the work proposed for execution and the heads of account
to which it is chargeable are as follows:—

Constructing a new waste weir.	Rs. 210.
do. do. sluice.	126
Total Capital Ordinary Original Works Rs. 336	
Raising and sectioning the bund.	
Revenue Repairs.	194
	Rs. 530.

3. The following particulars of the Tank are recorded—

Ayacut area. 70 Acres
Assessment. 302 Rupees.
Average revenue. 18 —
Highest do. 12 —
Expenditure during the previous four years. Not known.

X
5

The area of the catchment basin is $1\frac{3}{4}$ square miles; the maximum flood supply is calculated at 608 cubic feet per second for discharging which, as surplus there is, a natural escape 45 feet in length which is reported to be insufficient. It is, therefore, proposed to construct a masonry weir, 61 feet in length on the site of the existing escape. The bund, also is reported to be low and weak. The estimate provides for, constructing a new weir and a sluice and for raising and sectioning the bund.

Genl. Secy.

Main Rd.

Asst. Chief Engineer for Irrigation
for Chief Engineer for Irrigation

To

The Secretary to Government
Public Works Dept.

Chas.

P. W. 1876 Dept
No 1789

From
The Chief Eng^r
for Irrigation

Dated 9 $\frac{3}{4}$ March 1876
Recd 11 $\frac{3}{4}$
E. Y. No 3 H^r

Note on estimate in
connection with the Nagullah
Wooraganu Comtah Tank
in the Vailpand Taluk
Cuddapah Dist

No 17 March 76 B. W. 244

¹⁸⁷⁶
No 683 Public Works Dept¹⁸⁷⁶

Proceedings of the Madras Government
Under date the 17th March 1876
Read the following

From
The Chief Eng^r for Irrigⁿ (No. 3 W. 49th March 1876)

The following estimate forwarded
by the District Engineer, Cuddapah,
is sanctioned.

Raising and Sectioning the
land, Constructing a new waste
weir and a new sluice.

Capital Ordinary - Rs. 336 - - -
Revenue Repairs - .. 19 1/2 - - -
Total Rupees 530 - - -

2. This sanction has been regis-
tered as No. 1521 of 1875-76.


Ampl.

Ampl.

J. E. Cuddapah
Collector - do -
Ex. P. to A. J. with 7 Orig. Encls.
C. E. for J. with
Rev. Dept

Recd. 25-3-76

Ch. B.

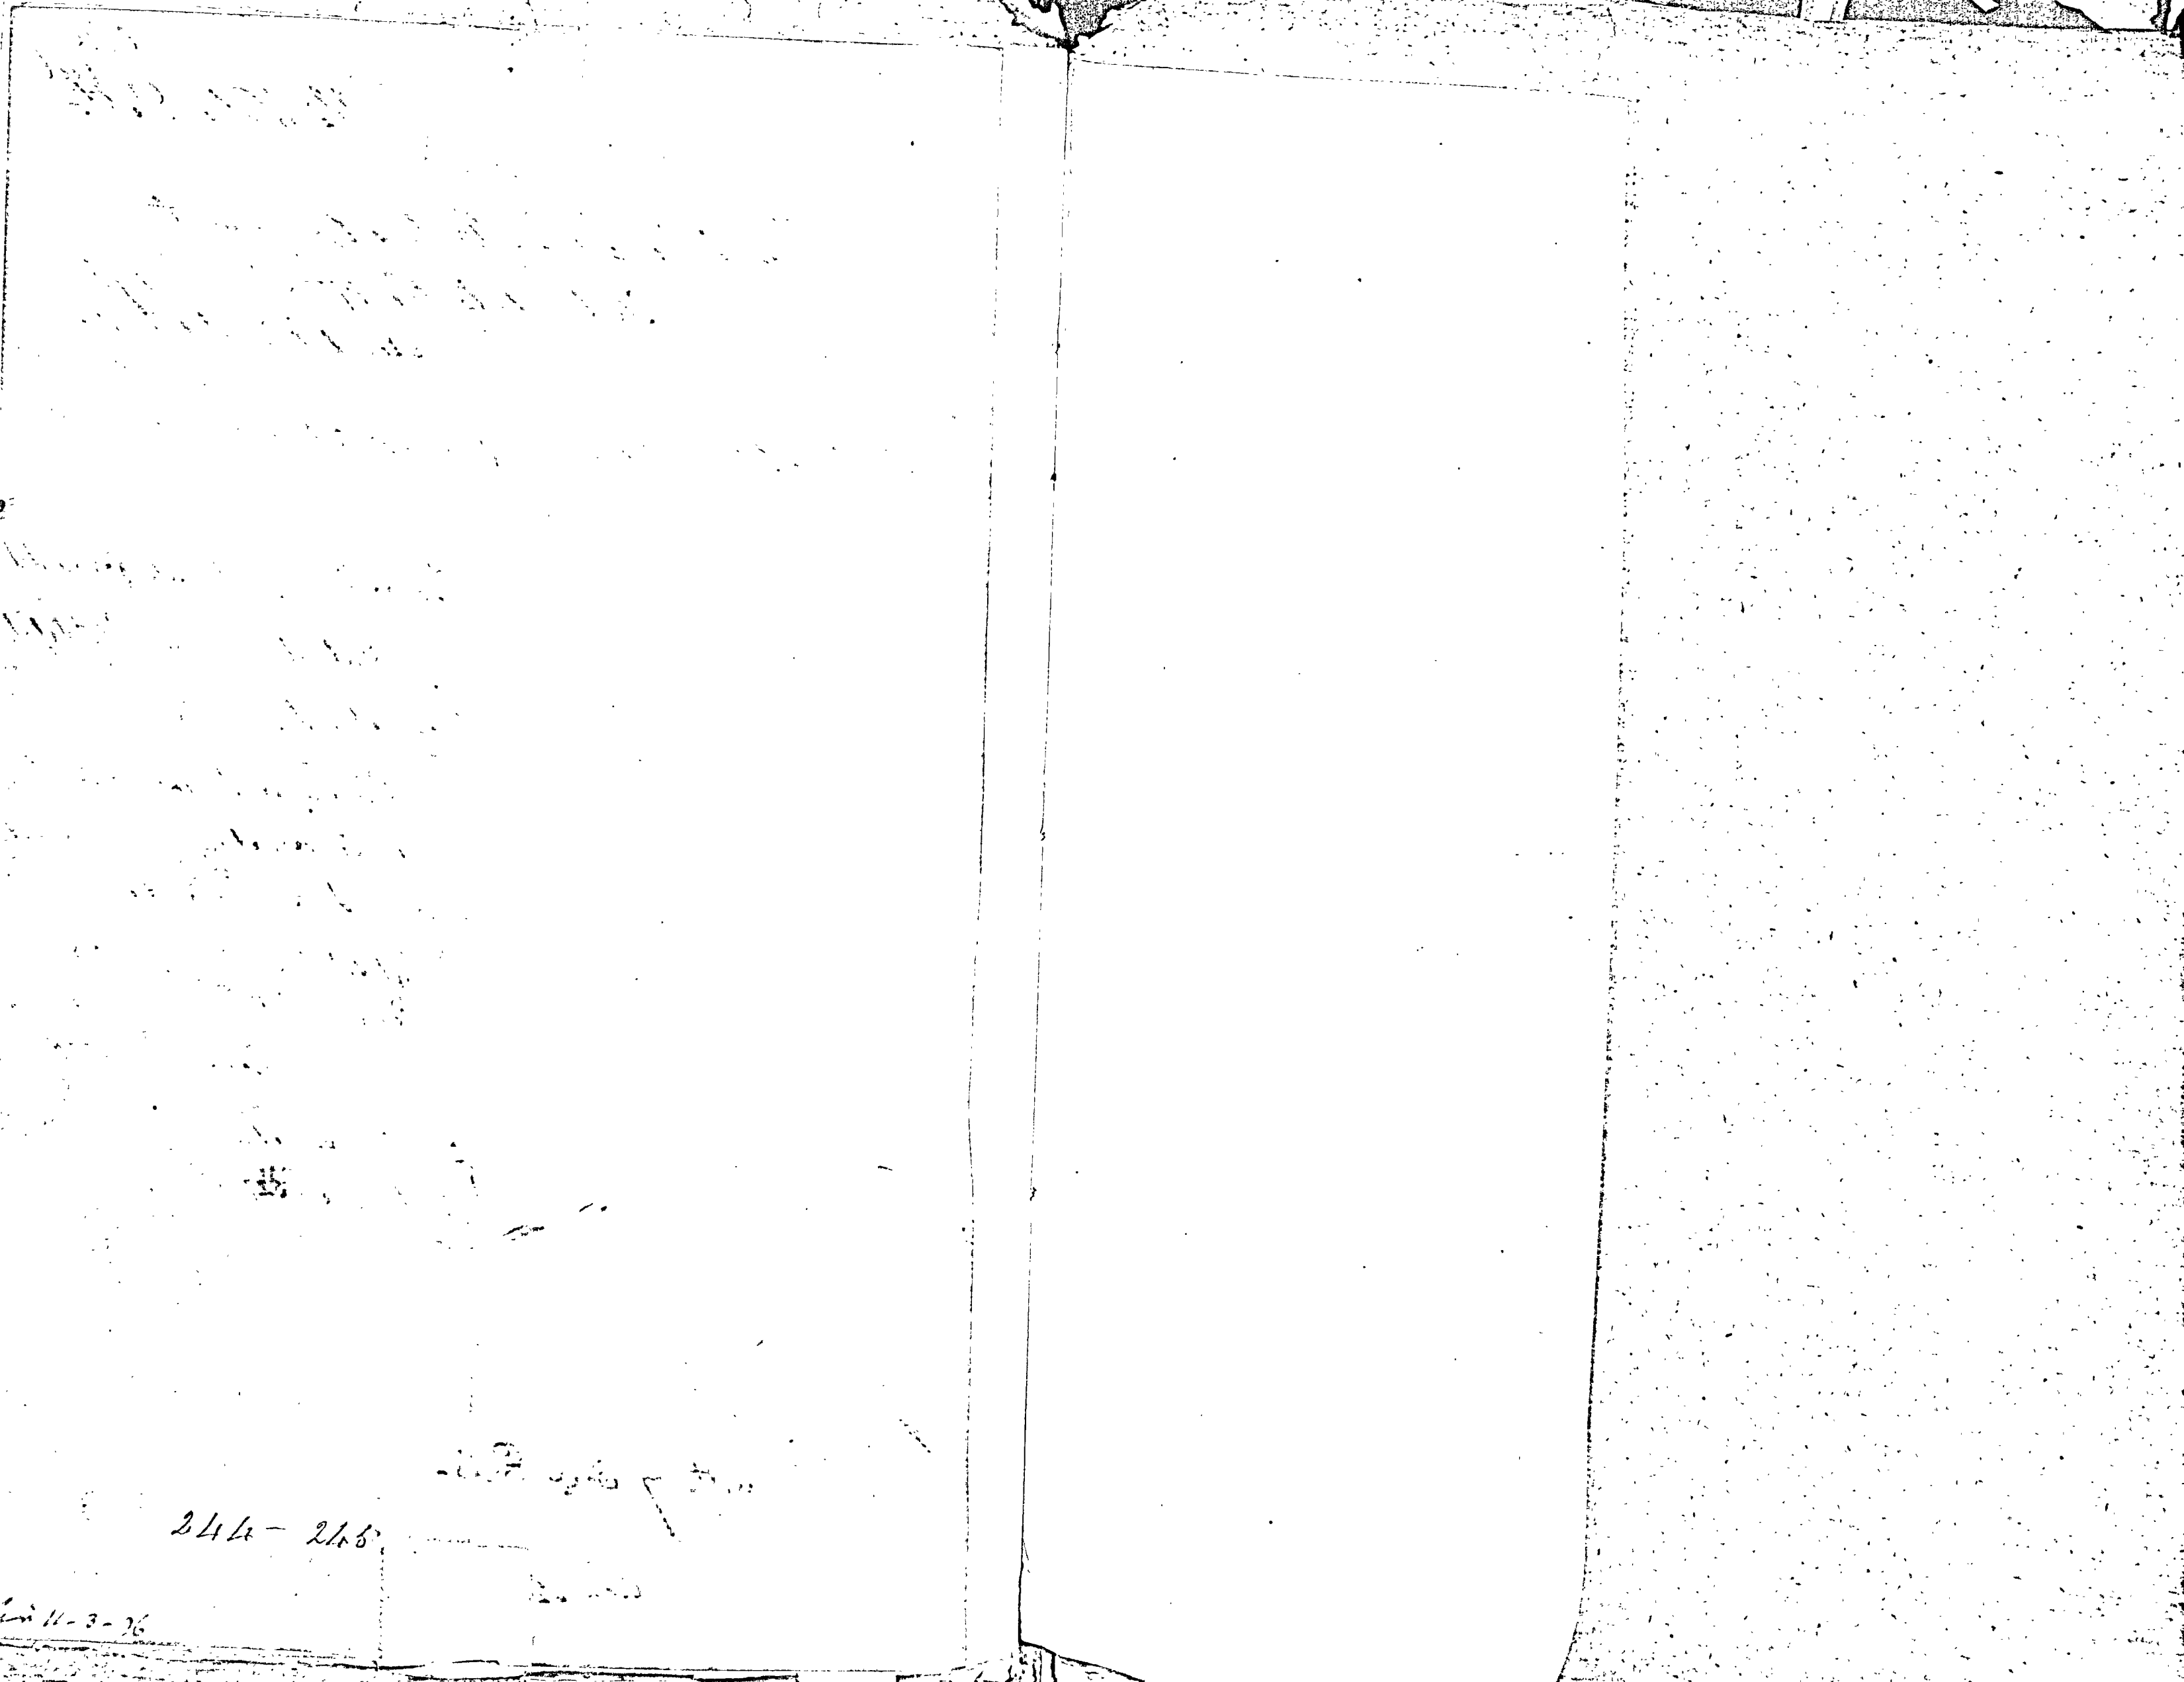

244-245

11-3-76

1878

Sd. of 1876 Madras.
PUBLIC WORKS.

To

The Dy. Engineer
Cuddalore

1873

Dated

Issued

Recd.

Encl.

G. O. 17th March 1873 No. 1183

Nos. 244-245

Pagullah Boobragam

Contd. Tank, Cuddalore

St. - The Estimate
amounting to Rs. 530 for
draining and sectioning the
bund & constructing a
new waste weir & sluice,
to the
undertaken.

244-245

11-3-76