

(1) Number of pages 18
(2) Date of repair 12.8.86
(3) Initials of the Referencer lcm

TAMIL NADU ARCHIVES

GOVERNMENT OF TAMIL NADU

Public Works DEPARTMENT

G.O. No.	2990 W	Press.
B.R. No.		Mis.
Dated	26-7-1878	192.

Not to be folded or roughly handled

W. km.

GOVERNMENT OF MADRAS
PUBLIC WORKS DEPARTMENT.

26th July 1878, No 2,990 W.

Buildings and Roads
Civil Works

Read the following paper —

No 254. From F B PEMBERTON, C E, Officiating District Engineer, South Arcot, to the Chief Engineer, Public Works Department, dated Cuddalore, 29th June 1878, No 143

With reference to G O, No 1,533 W, dated 26th March 1878, I have the honor to submit for the sanction of Government an estimate of Rupees 770 for constructing a wall around the burial-ground at Vannarasapahem near Cuddalore

2. An estimate of Rupees 665 for a wall 4 feet in height was first prepared and forwarded to the Collector for his approval by Major Mead, but Mr. Crumckshank returned the same with an intimation that the wall should be at least 5 feet high, it not more, as people could easily get over a wall 4 feet high. The present estimate provides accordingly for a height of 5 feet, and it has met with the approval of that officer.

3. If the estimate is sanctioned, the work can be carried out from the next year's Reserve or when funds are available

No. 255. ORDER THEREON, 26th July 1878, No. 2,990 W

THE Government, being of opinion that a wall of 4 feet in height, if well covered with broken glass, would be as good a protection as one of 5 feet, ordered the estimate to be reduced accordingly

2. As now revised, it amounts to Rupees 665, and is sanctioned for execution when funds are available

3. This sanction has been registered as Provincial No. 63 B of 1878-79

(True Extract)

(Signed) E A FOORD, Colonel, R E,
Secretary to Govt, P W D

(True Copy)

Major, R E,
Under Secy to Govt, P W D.

To the District Engineer, South Arcot
" Ecclesiastical Department
" Examiner of Public Works Accounts

Trsd T D Ryan
Spare Copies

10172 20/10/1901
C.D. 7001

1. 14. 1901

10172 20/10/1901

10172 20/10/1901

10172 20/10/1901

10172 20/10/1901

10172 20/10/1901

10172 20/10/1901

Specification to accompany the
Estimate for constructing a compound wall
around the Burial ground at Kannarpaliam
Cuddalore Taluk South Arcot District.

Amount of Estimate Rs 770⁶⁵

The compound wall on four sides of the
Burial ground including the gateway and
pillars will be 605 ft in length. The
foundation of the walls will be $1\frac{1}{2}$ ft broad
and $2\frac{1}{2}$ ft deep; the superstructure of the walls
between the intermediate pillars will be $1\frac{1}{2}$ ft
broad and 5 ft high including coping; the pil-
lars being $1\frac{1}{2}$ ft square and $5\frac{1}{4}$ ft high including
caps and built 6 ft apart on foundations of
2 ft square and $2\frac{1}{2}$ ft deep. The foundation
and superstructure of walls and pillars
will consist of brick in clay pointed and
whitewashed. The caps to pillars and
coping to walls will be of brick in mortar
with broken glass at top.

The gateway to the Burial ground

well be 10 ft wide and will be provided with
strong teak wood door complete with all ne-
cessary iron fittings, the foundation of the pil-
lars will be $2\frac{1}{2} \times 2\frac{1}{2} \times 2\frac{1}{2}$ and superstructure -
 $2 \times 2 \times 6$ including cop of brick and clay pointed
and whitewashed.

Great care must be taken that the
joints of the Brick work are raked out to a
depth of not less than $1\frac{1}{2}$ inches before they
are pointed.

J. B. Pemberton
C E

Distt. Engr's Office S. Aust.
Cuddalore 15 June 1878 } Offg. Distt Engr.

Amichand
Collector

South Arcot District
Cuddalore Division
Cuddalore Talook

2220
27/72

Enclosure in letter No. 112 & 13.
Jangp from Dist Engr & sent to
the Collector & sent

Enclosure No. 2 in letter No. 143
229. Jangp from the Dist Engr
& sent to the Dist Engr D.P.W.

Specification to accom-
pany the Estimate for con-
structing a Compound
wall around the Burial
ground at Vannarpaliam.

Amount of Estimate Rs 770.

D P W.
SOUTH ARCOT. No. 143

DISTRICT ENGINEER'S OFFICE.

Camp Cuddalore
Dated 29 June 1878.

FROM
THE DISTRICT ENGINEER,
SOUTH ARCOT.

Buildings
and Roads

TO
THE CHIEF ENGINEER,

D. P. W.

Enclosures

Sir,

1 Plan

1 Estimate

1 Specification

With reference to G. O. No. 1533 W
dated 26th March 1878, I have the
honour to submit for the sanction
of Government, an Estimate
of Rupees (770-0-0) Seven
hundred and seventy for
Constructing a wall around
the Burial ground at Vannar-
paliam near Cuddalore.
2. An Estimate of Rupees 665
for a wall 4 feet in height was
first prepared and forwarded to
the Collector for his approval by
Major Head, but Mr. Cruickshank
returned the same with

an

2790
an intimation that the wall should
be at least 5 feet high, if not more,
as people will easily get over a
wall 4 feet high. The present estimate
provides accordingly for a height of
5 feet, and it has met with the
approval of that Officer.

3. If the estimate is sanctioned
the work can be carried out from
the next year's Reserve, or when
funds are available.

I have the honor to be

Sir,

Your most obedient servant
J. H. B. C. C.,

Offg District Engineer

10. 50

6

I have been thinking
of you very much lately.
I hope you are well.
I am well at present.
I shall be glad to hear
from you soon.

134)

1970

Burial ground at Vanarsa
- wolum near Linddalue
— Submission for the
sanctions of Government
an estimate of Rs 11.0 for
constructing a wall around
the —

To advy 9-7-78
To advy again 24-7-78
Cir 13.7.78

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the

Read the following :—

From,
The District Engineer } (H.C. No. 143 of 27th Jan 1878.)
South Arcot.

The Government are
of opinion that a wall
of four feet in height,
if well covered with
broken glass, would
be as good a protection
as one of five feet.
But as funds are not
likely to be available
for this work, the
Governor in Council
sees no occasion to
sanction

Not to be taken into
from 4 ft. wall. The
Govt. then found it
unavailable. It is not
likely to have the
funds for this purpose
in the future.
J.P.

sanction any estimate
for it -

Wk
12.7.78

Est

D. E. South Arcot
Ecclesiastical Dept.

To acty 9-7-78

To acty again 24-7-78

By Cir 13-7-78 Rd 16-7-78

P. W. D.
13th
Durb
No 2990 W.

Proceedings of the Madras Government
Under date the 25th July 78.
Read the following

From
The Dist Eng. South Arcot (A.E. No 143 d/29 June 1878)

The Government, being
of opinion that a wall of
four feet in height, if well
covered with broken glass, would
be as good a protection as
one of five feet, ordered
the Estimate to be reduced
accordingly.


As now revised, it
amounts to Rs 665, and is
sanctioned for execution
when funds are available.

Dist Eng. South Arcot
Ecclesiastical Dept.

Est. P. W. Dept. No 143 d/29 June 1878

By J. L. Secy 28-7-78 No. 633 of 1878 79

This sanction has been registered as Home 25777

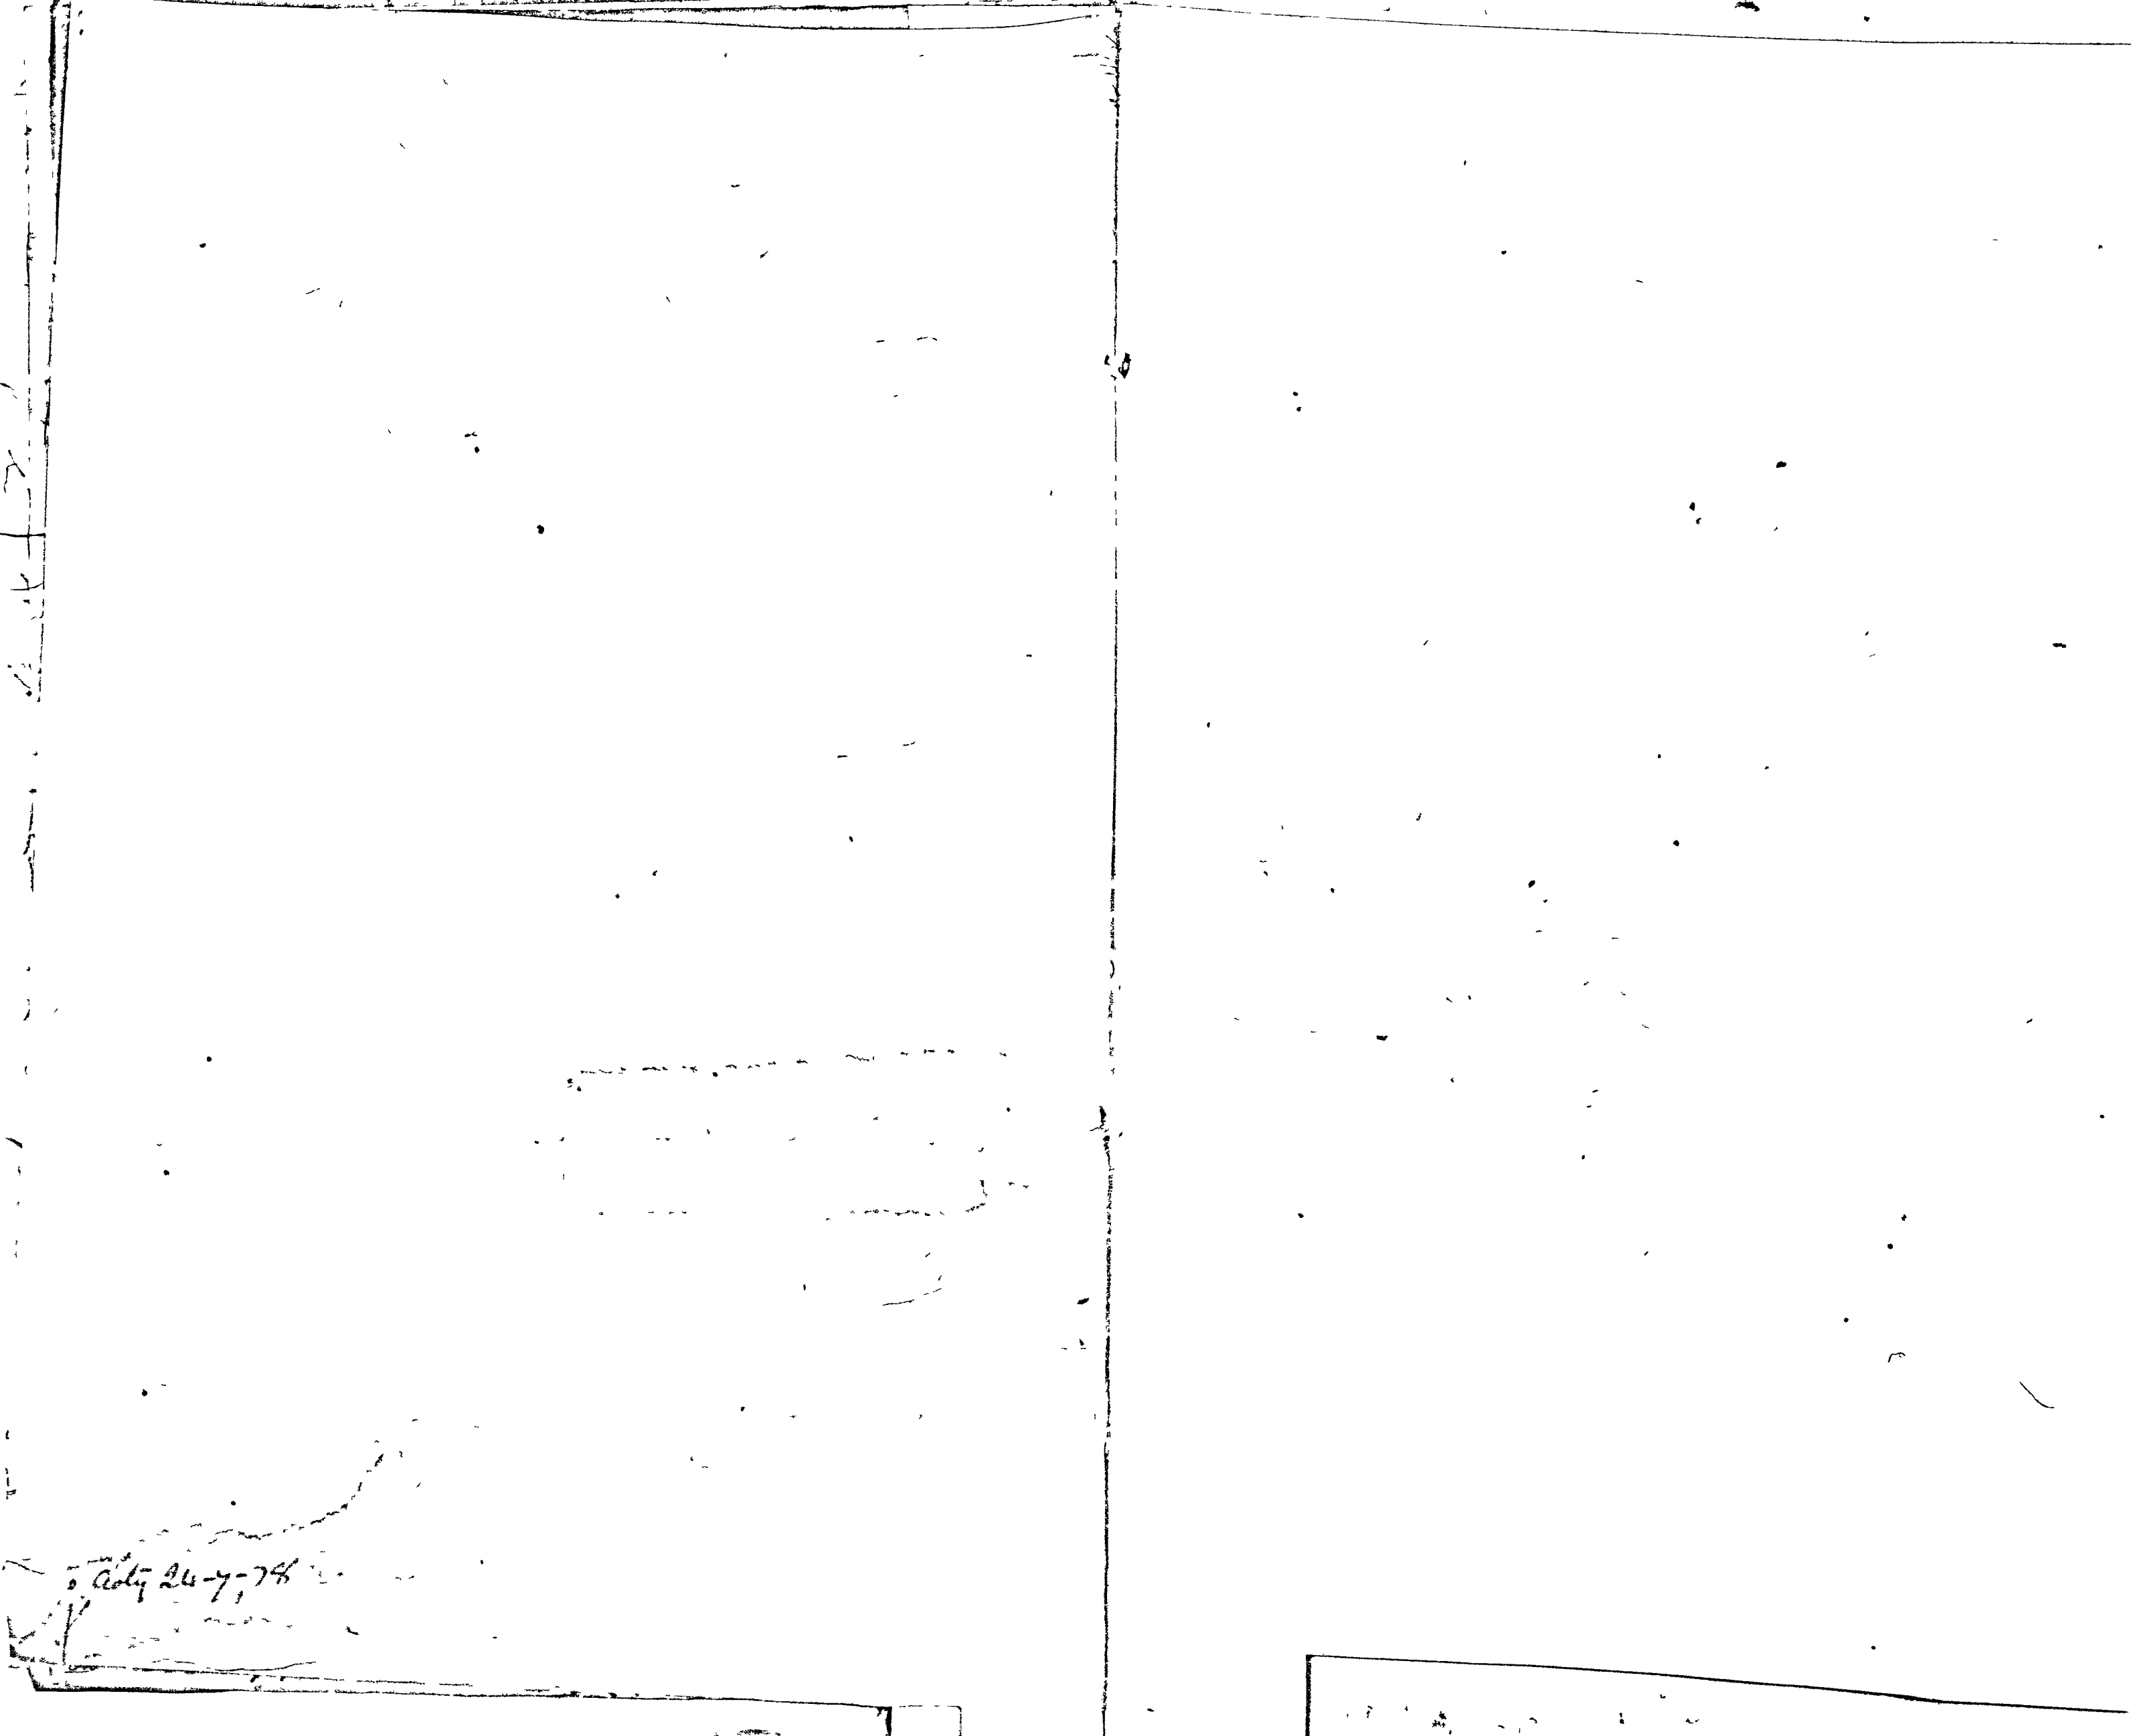

Oct 24-7-74

7330



Est. of (1878) Est.

PUBLIC WORKS

D. R. Hancock

District

Account

No. 1

C. 26th July 1878

Burial Ground at Vannarpani
South Arcot Div: - The revised
estimate of Rs. 665 for
constructing a wall
around the —
sanctioned.

Sanctioned