(1) பக்கங்களின் எண்ணிக்கை 46

(2) புதுக்கித் திருப்பிய நாள் ஆகஸ்ட் 1988

(3) ஆதாரங்குறிப்பவர் சுருக்கொப்பம்

தமிழ்நாடு ஆவணக் காப்பகம்.

தமிழ்நாடு அரசு

பொதுப்பணித் துறை

அரசாணை எண். 2460W
மு. கோப்புத் தாள் எண்.

அச்சகம்
பலவகை

நாள் : 6-10-1884

மடிக்கவோ கண்டபடி கையாளவோ கூடாது

ஆவண. கா-1—18,006—15-6-87.

2460
1

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following letter from Lieutenant-Colonel H. M. VIBART, R.E., Superintending Engineer, III Circle, to the Inspector-General of Registration, Madras, dated Kistnapúram, 2nd September 1884, No. 1074.

With reference to G.O., No. 54 W., dated 10th January 1884, I have the honor to forward, for countersignature and transmission to Government, an estimate, amounting to Rs. 2,183, for constructing a sub-registrar's office at Cumbum, with terraced roof, as per standard design approved of in G.O., No. 120 W., dated 14th January 1882.

2. The site chosen for the sub-registrar's office is on ground near the village of Bestawarpett, the locality recommended by Mr. Glenny for public offices. The Collector observes that the registrar's office should be near the taluk cutcherry, and till a taluk cutcherry is built at Bestawarpett, the erection of a sub-registrar's office would be a mistake.

T. No. 3779.

Submitted for the sanction of Government. It will be some time before funds will be allotted. In the meanwhile, the question of the site on which the office shall be built can be settled. I mentioned in my letter, G. No. 3266, dated the 24th December 1883, that "the best site would be the one chosen by Mr. Glenny for the construction of the several public offices," but if these offices are not to be built within any reasonable time, the proposed new office may be built on some eligible site in the town of Cumbum, as it is of the greatest importance that the records should be lodged and secured in a proper building.

OOTACAMUND,
12th September 1884.

(Signed) G. HAMNETT,
Inspector-General of Registration.

No. 2186, Judicial.

Approved and transferred to the Public Works Department. The office should not be commenced without previously consulting the Inspector-General as to the site.

(By Order.)

OOTACAMUND,
26th September 1884.

(Signed) M. HAMMICK,
Acting Under Secretary.

ORDER—dated 6th October 1884, No. 2460 W., Public Works.

The estimate, amounting to Rs. 2,183, for constructing a sub-registrar's office at Cumbum, in the Kurnool district, is sanctioned for execution when funds are available.

2. The question as to site should be settled by the Superintending Engineer in communication with the Inspector-General of Registration.

3. This sanction has been registered as Provincial No. 165 W. of 1884-85, and classified as Civil Buildings, Original Works.

(True Extract.)

Major, R.E.,
Under Secy. to Govt., P.W.D.

To the Superintending Engineer, III Circle, with four enclosures.
" Examiner, Public Works Accounts.
" Judicial Department.

Exd. E. Fernandez.
Spare Copies

2460
D

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1884} Madras.

PUBLIC WORKS.

Dated October, 6th.

Read.

Encl.

G.O., 6th Oct. 1884, No. 2460 W.

OCTOBER.

Sub-Registrar's Office at Cumbum

Estimate for a —, in the Kurnool district, sanctioned; question of site to be settled by the Superintending Engineer and the Inspector-General of Registration.

2460/3

Estimate of the Cost of constructing a Sub-Registrar's Office with terraced roofing according to Standard Design, Sheet No. 21, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls		99 0	4 6	4 6	2,005	
Partition		21 0	3 8	4 6	347	
Verandah walls		35 9	3 6	4 6	563	
Steps		13 0	3 0	1 0	39	
Cubic feet		...	...	...	2,954	
Earth-filling in Basement.						
Rooms		24 0	21 0	1 6	756	
Platform		12 0	8 6	1 0	102	
Verandah		25 9	5 1½	1 6	198	
Cubic feet		...	...	...	1,056	
Concrete.						
Outer walls		99 0	3 6	1 0	347	
Partition		22 0	2 8	1 0	59	
Verandah walls		36 9	2 6	1 0	92	
Steps		13 0	3 0	1 0	39	
Cubic feet		...	...	...	537	
Brickwork in Foundations.						
Footing course—						
Outer walls		99 0	2 8	1 6	396	
Partition		22 10	1 10	1 6	63	
Verandah wall		37 7	1 6	1 6	85	
Above footing to ground level—						
Outer wall		99 0	2 3	2 0	445	
Partition		23 3	1 6	2 0	70	
Verandah wall		38 0	1 0	2 0	76	
Cubic feet		...	...	...	1,135	
Brickwork in Basement.						
Outer walls		99 0	2 3	2 0	446	
Partition		23 3	1 6	2 0	70	
Verandah wall		38 0	1 0	2 0	76	
Steps		13 0	3 0	0 6	20	
Do.		11 0	2 0	0 6	11	
Do.		9 0	1 0	0 6	5	
					628	
Deduct stone in steps and under posts as per details		...	...	...	29	
Cubic feet		...	...	...	599	

3

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure.						
Outer walls	...	99 0	1 6	12 0	} 2,214	
Partition	...	24 0	1 6	12 0		
Parapet	...	101 0	1 0	0 6		
Do.	...	100 0	0 9	1 0	51	
Do.	...	101 0	1 0	0 4	75	
Binding wall	...	25 0	1 6	0 9	34	
					28	
Deductions—						2,402
Doors	2	4 0	1 6	8 0	96	
Windows	9	3 6	1 6	5 0	236	
Archwork as per details	...	...	...	...	45	
Cubic feet ...	...	...	...	...	...	377
Archwork.						2,025
Segmental arch over doors	2	5 3	1 6	1 0	16	
Do. do. windows ...	4	4 9	1 6	1 0	29	
Cubic feet ...	...	..	...	...	45	
Cut-stone work under Posts and in Steps.						
Under posts	4	1 6	1 6	0 6	5	
Steps	...	39 0	1 3	0 6	24	
Cubic feet ...	...	...	...	...	29	
Teakwood.						
Clerks and Registrar's room joists ...	17	15 6	0 3	0 7½	41	
Record-room joists	17	12 6	0 3	0 6		
Small joists under coping at sides ...	32	2 7½	0 3	0 6	} 39	
Do. do. at angles ...	4	3 6	0 3	0 6		
Waling pieces	2	28 0	0 2	0 6	} 10	
Do.	2	29 6	0 2	0 6		
Verandah posts	4	0 5	0 5	7 4½	5	
Do. breastsummers	3	9 1½	0 5	0 7½	7	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	19	8 0	0 2½	0 3½	9	
Do. wall-plate	1	27 0	0 3	0 5	3	
Do. eave board	...	27 0	0 4	0 ⅔	1	
Cubic feet ...	...	...	...	...	117	
Wrought-iron Work.						
¾" diameter bolts to secure wall-plates.	6	1 9=	10 6	× 1·47	15·43	
¾" hex. nuts and bolt heads for do.	6	...	...	× ·43	2·58	
3" × 3" × ½" washers for do.	6	...	...	× ·31	1·86	
lb. ...	...	..	...	...	19·87	
Say lb. ...	...	...	...	...	...	20
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	4	3 6	...	5 0	70	Do.

2460.
4

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Windows with glazed shutters and frames with ¾" square iron bars for Record-room.	5	3 6	...	5 0	88	Sq. feet.
Terrace roofing	...	30 0	...	28 6	855	Do.
Squares ...	...	...	...	...	...	8·55
Slope terracing for verandah	...	27 0	...	8 0	216	Sq. feet.
Squares ...	...	...	...	...	...	2·16
Flooring with 8-inch square bricks over a levelling course.						
Clerks and Registrar's room	...	24 0	...	12 0	288	
Record-room	...	24 0	...	9 0	216	
Verandah	...	27 9	...	6 6	180	
Door pieces	2	4 0	...	1 6	12	
					696	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	687	
Squares ...	...	...	..	...	...	6·87
Plastering with two coats.						
Interior—						
Clerks and Registrar's room		72 0	...	12 0	864	
Record-room		66 0	...	12 0	792	
Exterior—						
Basement all round		120 3	...	2 4½	286	
Superstructure		105 0	...	12 0	1,260	
Parapet		101 0	...	5 0	505	
Binding wall		25 0	...	3 0	75	
Door jambs	2	20 0	.	1 6	60	
Window jambs	4	17 0	...	1 6	102	
Do.	5	13 6	...	1 6	101	
						4,045
Deductions.						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	9	3 6	...	5 0	315	
						443
Square feet ...	...	...	...	...	...	3,602
Squares ...	...	...	...	...	...	36·02
Plaster cornice exterior.						
Ends of terrace... ... Lineal feet.	...	...	...	...	114	
Wooden railing for Clerks' room... L. ft.	...	...	...	...	12	
Painting doors, windows and exposed woodwork with three coats of Carson's paint.						
Venetian and panel-doors	3	64 0	...	...	192	
Do. windows ...	3	70 0	...	...	210	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting doors, windows and exposed woodwork with three coats of Carson's paint—cont.						
Glazed windows with iron bars ...	2	88 0	...	...	176	
Waling pieces	...	115 0	...	1 2	134	
Verandah posts	4	1 8	...	7 4½	49	
Brackets	6	1 0	...	1 0	6	
Eaves board	...	27 0	...	0 8	18	
Square feet ...	...	...	...	...	785	
Squares ...	...	...	...	...	...	7·85
Wood-oiling three coats.						
Railing	2	12 0	...	3 0	72	
Joists	17	15 6	...	1 6	395	
Do.	17	12 6	...	1 3	266	
Do.	32	2 7½	...	1 2		
Do.	4	3 6	...	1 2	114	
Breastsummers	...	27 0	...	1 8		
Rafters	19	8 0	...	0 9½	45	
Wall-plate	...	27 0	...	0 8	120	
					18	
Square feet ...	...	...	...	...	1,030	
Squares ...	...	...	...	...	...	10·30

ABSTRACT.

Quantity.	Item.	Rate. RS. A. P.	Per	Amount. RS. A. P.
2,954 C. feet.	Excavation for foundations ...	...	1,000 C. feet.	...
1,056 „	Earth-filling in basement ...	...	100 „	...
537 „	Concrete	...	„	...
1,135 „	Brickwork in foundations ...	...	„	...
599 „	Do. in basement	...	„	...
2,025 „	Do. in superstructure ...	...	„	...
45 „	Archwork	...	C. foot.	...
29 „	Cut-stone work	...	„	...
117 „	Teakwood wrought and put up ...	...	lb.	...
20 lb.	Wrought-iron work	...	S. foot.	...
64 S. feet.	Venetian and panel doors with frames.	...	„	...
70 „	Venetian windows with frames ...	...	„	...
88 „	Glazed windows with frames and iron bars for Record-room.	...	Square.	...
8·55 Squares.	Terrace roofing	...	„	...
2·16 „	Slope terracing	...	„	...
6·87 „	Flooring with 8-inch square bricks.	...	„	...
36·02 „	Plastering with two coats... ...	...	L. foot.	...
114 L. feet.	Plaster cornice exterior	...	„	...
12 „	Wooden railing	...	Square.	...
7·85 Squares.	Painting doors and windows and other exposed woodwork with three coats of Carson's oak color.	...		...

ABSTRACT—*cont.*

Quantity.	Item.	Rate. RS. A. P.	Per	Amount. RS. A. P.
0 ·30 Squares.	Wood-oiling roof timbers, &c., with three coats.	...	Square.	...
	Contingencies at 5 per cent. ...	...	...	...
	Total ...	...	...	...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

3460.
5

5

ESTIMATE of the Cost of constructing a Registrar's Office with terraced roofing according to Standard Design, Sheet No. 19, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls		149 0	4 6	4 6	3,017	
Partition		27 0	3 8	4 6	446	
Verandah walls		44 9	3 6	4 6	705	
Steps		15 0	3 0	1 0	45	
Cubic feet					4,213	
Earth-filling in Basement.						
Rooms		30 0	40 0	1 6	1,800	
Platform		11 6	20 0	1 0	230	
Verandah		31 9	7 0	1 6	333	
Cubic feet					2,363	
Concrete—						
Outer walls		149 0	3 6	1 0	522	
Partition		28 0	2 8	1 0	75	
Verandah walls		45 9	2 6	1 0	114	
Steps		15 0	3 0	1 0	45	
Cubic feet					756	
Brickwork in Foundations.						
Footing course—						
Outer walls		149 0	2 8	1 6	596	
Partition		28 10	1 10	1 6	79	
Verandah walls		46 7	1 6	1 6	105	
Above footing to ground level—						
Outer walls		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah walls		47 0	1 0	2 0	94	
Cubic feet					1,633	
Brickwork in Basement.						
Outer walls		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah walls		47 0	1 0	2 0	94	
Steps		15 0	3 0	0 6	23	
Do.		13 0	2 0	0 6	13	
Do.		11 0	1 0	0 6	6	
					895	
Deduct stone in steps and under posts as per details.					33	
Cubic feet					862	

2460. 6

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure.						
Outer walls		149 0	1 6	14 0	3,759	
Partition		30 0	1 6	14 0		
Corbels	8	1 0	0 6	1 6	6	
Parapet		151 0	1 0	0 6	76	
Do.		150 0	0 9	1 0	113	
Do.		151 0	1 0	0 4	50	
Binding wall		31 0	1 6	0 9	35	
						4,039
Deductions—						
Doors	2	4 0	1 6	8 0	96	
Windows	13	3 6	1 6	5 0	341	
Ventilators	7	3 6	1 6	2 3	83	
Archwork as per details					59	
						579
Cubic feet						3,460
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0	59	C. feet.
Do. windows	6	4 9	1 6	1 0		
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps		45 0	1 3	0 6	28	
Slabs under beams	2	3 0	2 0	0 4	4	
Do.	4	2 0	2 0	0 4	5	
Cubic feet					42	
Teakwood.						
Beams	4	22 3	0 10	1 5	105	
Joists	56	12 3	0 3	0 6		
Do.	28	10 9	0 3	0 6	139	
Do. small under coping	42	2 $7\frac{1}{2}$	0 3	0 6		
Do. angle do.	4	3 6	0 3	0 6		
Waling pieces	2	35 3	0 2	0 6	14	
Do.	2	47 0	0 2	0 6		
Verandah posts	4	0 6	0 6	7 $4\frac{1}{2}$	7	
Do. breastsummers	3	11 0	0 6	0 9	12	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	23	9 9	0 3	0 4	19	
Do. wall-plate		33 0	0 $3\frac{1}{2}$	0 5	4	
Do. eave board		33 0	0 $\frac{3}{4}$	0 6	1	
Cubic feet					303	
Wrought-iron work.						
$\frac{3}{4}$" bolts to secure verandah wall-plate.	6	1 9	=10 6	×1·47	15·43	
$\frac{3}{4}$" hex. nuts and heads	6			×·43	2·58	
3" × 3" $\frac{1}{8}$" washers	6			×·31	1·86	
lb					19·87	
Say lb.						

b

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	6	3 6	...	5 0	105	Do.
Windows with glazed shutters and frames and $\frac{3}{4}$" square iron bars for Record-room.	7	3 6	...	5 0	123	Do.
Glazed ventilators	7	3 6	...	2 3	55	Do.
Terrace roofing	...	36 0	...	47 6	1,710	Do.
Squares ...	...	...	...	...	...	17·10
Slope terrace for verandah	...	33 0	...	9 9	322	Sq. feet.
Squares ...	...	...	...	...	...	3·22
Flooring with 8-inch square bricks.						
Rooms	...	40 0	...	30 0	1,200	
Verandah	...	33 9	...	8 0	270	
Door pieces	2	4 0	...	1 6	12	
					1,482	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	1,473	
Squares ...	...	...	...	...	...	14·73
Plastering with two coats.						
Interior	...	...	...	...	...	
Rooms	2	100 0	...	14 0	2,800	
Exterior	...	...	...	...	...	
Basement all round	...	173 3	...	2 4½	411	
Superstructure	...	155 0	...	14 0	2,170	
Parapet	...	151 0	...	5 0	755	
Binding wall	...	31 0	...	3 0	93	
Door jambs	2	20 0	...	1 6	60	
Window do.	6	17 0	...	1 6	153	
Do. do.	7	13 6	...	1 6	142	
Ventilator do.	7	8 0	...	1 6	84	
						6,668
Deductions—						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	13	3 6	...	5 0	455	
Ventilators ... ... 2 ×	7	3 6	...	2 3	110	
						693
Square feet ...	...	...	...	...	...	5,975
Squares...	...	...	...	...	...	59·75
Plaster cornice at ends of terrace...L. feet.	...	...	...	...	166	
Wooden railing for Clerk's room...L. feet.	...	...	...	...	20	

Detailed Quantities.—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting doors, windows and exposed woodwork with three coats of Carson's oak paint.						
Venetian and panel doors	3	64 0	...	...	192	
Do. windows	3	105 0	...	...	315	
Glazed windows with iron bars ...	2	123 0	...	...	246	
Do. ventilators	1	55 0	...	...	55	
Waling pieces	...	164 6	...	1 2	192	
Verandah posts...	4	2 0	..	7 4½	59	
Do. brackets.	6	1 0	...	1 0	6	
Eave Board	0	33 0	...	1 0	33	
					1,098	
Square feet ...	...	...	...	...		
Squares ...	...	...	...	...	...	10·98
Wood-oiling, three coats.						
Railing	2	20 0	...	3 0	120	
Beams	4	23 0	...	3 8	337	
Joists	56	12 3	...	1 3	1,234	
Do.	28	10 9	...	1 3		
Do.	42	2 7½	...	1 2	145	
Do.	4	3 6	...	1 2		
Do.	3	11 0	...	2 0	66	
Breastsummers	23	9 9	...	0 11	206	
Rafters	...	33 0	...	1 1½	37	
Wall-plate						
Square feet ...	...	...	...	...	2,145	
Squares ...	...	...	...	...	21·45	

ABSTRACT.

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
4,213 C. feet ...	Excavation for foundations	...	1,000 C. feet.	...
2,363 „ ...	Earth-filling in basement	...	„	...
756 „ ...	Concrete	...	100 C. feet.	...
1,633 „ ...	Brickwork in foundations	...	„	...
862 „ ...	Do. in basement	...	„	...
3,460 „ ...	Do. in superstructure	...	„	...
59 „ ...	Archwork	...	Cubic foot.	...
42 „ ...	Cut-stone work	...	„	...
303 „ ...	Teakwood wrought and put up ...	...	lb.	...
20 lb. ...	Wrought-iron work	...	Square foot.	...
64 S. feet ...	Venetian and panel doors with frames.	...	„	...
105 „ ...	Venetian windows with frames ...	...		
123 „ ...	Glazed windows with frames and iron bars for Record-room	...	„	...
55 „ ...	Glazed ventilators	...	„	...
17·10 Squares.	Terrace roofing	...	Square.	...
3·22 „ ...	Slope terrace	...	„	...
14·73 „ ...	Flooring with 8-inch square bricks ...	...	„	...
59·75 „ ...	Plastering with two coats	...	„	...
166 Lin feet.	Plaster cornice, exterior	...	L. foot.	...
20 „ ...	Wooden railing	...	„	...

ABSTRACT—*cont.*

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
10·98 Squares.	Painting doors, windows, and exposed woodwork with three coats of Carson's oak paint	...	Square.	
21·45 „ ...	Wood-oiling roof timbers, &c., with 3 coats	...	„	...
	Contingencies at 5 per cent	...	...	...
	Total ...	...	...	...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

2460
8

DEPARTMENT PUBLIC WORKS.

REGISTRAR'S AND SUB-REGISTRAR'S OFFICES WITH TERRACE ROOFING.

Specification of works to be performed in executing the Standard Designs for Registrar's and Sub-Registrar's Offices according to Drawings, Sheets Nos. 19 *and* 21, *signed by the Officiating Consulting Architect on* 16*th September* 1881.

EXCAVATOR.

Clearing site.—Take down any existing building on the site, stacking such materials as it may be desirable to use again.

Excavation.—After the centre lines have been pegged and lined, set out on either side of the lines half the total breadth of the foundations, and excavate to the depth or depths shown on the drawing, or to such depth as the officer in charge of the works may direct.

Slips and Baling.—If slips occur during the progress of the works, clear the material away and bale any water lodging in the trenches from a hole or holes made without the limits of the same.

Ramming.—After the officer in charge of the work has seen that the trenches are the full and proper widths and depths well ram the bottom with heavy beaters for the after reception of the concrete.

BRICKLAYER.

Concrete.—Lay over the full breadth of the trenches about nine inches of concrete as hereinafter specified and well ram with heavy beaters to a thickness of about six inches. After the first layer has consolidated, lay a second and execute as before. The complete concrete should be about twelve inches thick.

Brickwork.—Mark off carefully the centre lines and lay off the thickness of the footing course according to the plan.

The brickwork will be executed in sound material, and care will be taken to insert during the progress of the work the door and window frames, wood-bricks for railing, &c.

The walls will be two bricks thick, about eighteen inches.

Splays.—The openings will be splayed as shown on the plan.

Arching.—The heads of the openings will be covered by segmental arches built in concentric rings clear of the frame. The space between the arch and the top of the frame will be carefully closed in after the brickwork has settled down.

Bond.—The bond should be English if possible.

Stones.—Set the stones under the verandah posts, also those under the beams and fasten properly. All wood supplied by the carpenter.

STONE MASON.


Provide and dress two lines No. 4 stones 1′ 6″×1′ 6″×6″ with mortice holes 2″ square and 2″ deep to receive the verandah posts.

Steps.—Provide and dress two lines, the steps shown on the drawing, tailing each stone not less than three inches.

CARPENTER.


NOTE.—*Vary this clause to suit Registrar's and Sub-Registrar's Offices.*—Supply beams——— × ——— × ——— supply joists ——— × ——— × ——— supply doors, windows and ventilators as shown on the drawing neatly rebated and morticed in a workmanlike manner.

Halve the joists into the beam to the extent of half an inch. The longitudinal joists will project over the wall to the extent of about 13 inches including the waling piece.

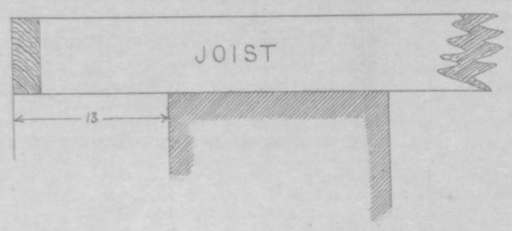

8

small cantilevers will be arranged along the longitudinal walls halved under the joists nearest the wall thus—

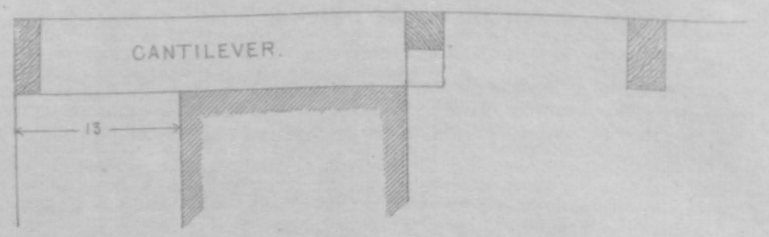

Support all joists and beams during the execution of the terrace and slightly ease the wedges as the work progresses, allow the supports to remain for three weeks after the completion of the terrace.

TERRACE.

Lay over ordinary terrace brick in mortar and finish off in the particular method employed in the district, taking care to make proper slopes for drainage.

FLOORING.

After the surface has been brought up to the proper level lay an even floor of 8-inch square tiles, set diagonally. The tiles will be rubbed on the surface and gauged to fit each other.

PLASTERER.

Plaster the whole of the interior and exterior with two coats of plaster (see Specification Standard Designs for Police Stations, dated 15th January 1881).

MATERIALS.

The bricks will be cast in a mould ——— inches × ——— inches × ——— inches well burnt and free from defects.
The timber will be well seasoned and free from defects.
The lime will be collected at ——— properly burnt and slaked.
The sand will be collected at ———.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

ESTIMATE of the Cost of constructing a Sub-Registrar's Office with tiled roofing according to Standard Design, Sheet No. 22, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls	...	99 0	4 6	4 6	2,005	
Partition	...	21 0	3 8	4 6	347	
Verandah walls	...	35 9	3 6	4 6	563	
Steps	...	13 0	3 0	1 0	39	
Cubic feet ...	...	...	...	...	2,954	
Earth-filling in Basement.						
Rooms	...	24 0	21 0	1 6	756	
Platform	...	12 0	8 6	1 0	102	
Verandah	...	25 9	5 1½	1 6	198	
Cubic feet ...	...	...	...	...	1,056	
Concrete.						
Outer walls	...	99 0	3 6	1 0	347	
Partitions	...	22 0	2 8	1 0	59	
Verandah walls	...	36 9	2 6	1 0	92	
Steps	...	13 0	3 0	1 0	39	
Cubic feet ...	...	...	...	...	537	
Brickwork in Foundations.						
Footing course—						
Outer walls	...	99 0	2 8	1 6	396	
Partition	...	22 10	1 10	1 6	63	
Verandah wall	...	37 7	1 6	1 6	85	
Above footing to ground level—						
Outer walls	...	99 0	2 3	2 0	445	
Partition	...	23 3	1 6	2 0	70	
Verandah wall	...	38 0	1 0	2 0	76	
Cubic feet ...	...	...	...	...	1,135	
Brickwork in Basement.						
Outer walls	...	99 0	2 3	2 0	446	
Partition	...	23 3	1 6	2 0	70	
Verandah wall	...	38 0	1 0	2 0	76	
Steps	...	13 0	3 0	0 6	20	
Do.	...	11 0	2 0	0 6	11	
Do.	...	9 0	1 0	0 6	5	
					628	
Deduct stone in steps and under posts as per details	...	...	...	...	29	
Cubic feet ...	...	...	...	...	599	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure.						
Outer walls	...	99 0	1 6	12 0	2,214	
Partition	...	24 0	1 6	12 0		
Gables	3	27 0	1 6	4 6	547	
Over gable ends	2	33 0	1 6	0 9	74	
Corbels	12	1 0	0 6	1 6	9	
Band over verandah roof	1	27 0	0 3	0 9	5	
						2,849
Deductions.						
Doorways	2	4 0	1 6	8 0	96	
Windows	8	3 6	1 6	5 0	210	
Gable ventilators	8	1 3	1 3	1 6	19	
Archwork as per details	...	...	...	...	94	
						419
Cubic feet ...	...	...	...	...	...	2,430
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0		
Do. windows	6	4 9	1 6	1 0		
Semi-circle arch for gable ventilator	2	11 9	1 6	1 0	94	C. feet.
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps	...	39 0	1 3	0 6	24	
Slabs under beams	3	2 0	3 0	0 4	6	
Do.	6	2 0	2 0	0 4	8	
Cubic feet ...	...	...	...	...	43	
Teakwood.						
Clerks' room purlins and ridge ...	3	14 0	0 5	0 9	23	
Record-room do.	3	11 0	0 5	0 9		
Wall-plates	2	25 6	0 3	0 3	3	
Rafters	36	19 0	0 3	0 4	57	
Struts	36	2 6	0 3	0 3	6	
Uprights (double)	72	3 2	0 3½	0 1½	8	
Eaves board	2	27 0	0 ¾	0 5	1	
Verandah posts	4	6 6	0 5	0 5	4	
Do. breastsummers	3	9 1½	0 5	0 7½	7	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	19	9 1½	0 3	0 4	14	
Do. wall-plates	1	27 0	0 3	0 5	3	
Do. eave board	1	27 0	0 ¾	0 5	1	
Cubic feet ...	...	...	...	...	129	
Wrought-iron work.						
¾" diameter bolts to secure verandah wall-plate	6	1 9 = 10 6 ×		1·47 =	15·43	
¾" hex. nuts and bolt heads. ...	6	...	... ×	·43 =	2·58	
3" × 3" × ⅛" washers for do. ...	6	...	... ×	·31 =	1·86	
lb. ...	...	...	...	...	19·87	
Say lb. ...	...	...	...	...	...	20

2460/10

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	4	3 6	...	5 0	70	Do.
Glazed windows with frames and ¾" square iron bars for Record-room ...	4	3 6	...	5 0	70	Do.
Glazed ventilators in gables	8	1 3	...	1 3	12½	Do.
Tiled roofing.						
Over rooms	...	26 9	...	39 0	1,043	
Do. verandah	...	27 0	...	9 1½	246	
Square feet ...	...	...	...	...	1,289	
Squares ...	...	...	...	...	...	12·89
Flooring with 8-inch square bricks.						
Clerks' and Registrar's rooms	...	24 0	...	12 0	288	
Record-room	...	24 0	...	9 0	216	
Verandah	...	27 9	...	6 6	180	
Door pieces	2	4 0	...	1 6	12	
					696	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	687	
Squares ...	...	...	...	...	...	6·87
Plastering with two coats.						
Interior—						
Clerks' and Registrar's room	...	72 0	...	12 0	864	
Record-room	...	66 0	...	12 0	792	
Gables	4	24 0	...	4 6	432	
Exterior—						
Basement all round	...	120 3	...	2 4½	286	
Superstructure	...	105 0	...	12 0	1,260	
Gables	2	27 0	...	5 2	279	
Wall over do.	2	33 0	...	3 0	198	
Door jambs	2	20 0	...	1 6	60	
Window do.	4	17 0	...	1 6	102	
Do. do.	4	13 6	...	1 6	81	
						4,354
Deductions.						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	8	3 6	...	5 0	280	408
Square feet ...	...	...	...	...	...	3,946
Squares ...	...	...	...	...	...	39·46
Wooden Railing.						
For Clerks' room ... Lineal feet.	...	...	...	...	12	...

10

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting doors, windows and exposed woodwork with three coats of Carson's paint.						
Venetian and panel doors	3	64 0	...	...	192	
Do. windows	3	70 0	...	...	210	
Glazed windows with iron bars ...	2	70 0	...	...	140	
Glazed ventilators	...	...	...	...	13	
Struts	36	2 6	...	1 0	90	
Uprights	72	3 0	...	0 8½	153	
Eaves boards	2	27 0	...	0 9	41	
Verandah posts...	4	6 6	...	1 8	43	
Do. brackets	6	1 0	...	1 0	6	
Do. eave board		27 0	...	0 9	20	
Square feet ...	...	...	...	...	908	
Squares ...	...	...	...	...	...	9·08
Wood-oiling, three coats.						
Railing	2	12 0	...	3 0	72	
Purlings and ridge	3	14 0	...	1 11	} 144	
Do.	3	11 0	...	1 11		
Rafters	36	19 0	...	0 11	627	
Breastsummers	...	27 0	...	1 8	45	
Rafters	19	9 1½	...	0 11	159	
Wall-plate	...	27 0	...	0 8	18	
Square feet ...	...	...	...	...	1,065	
Squares ...	...	...	...	...	...	10·65

ABSTRACT.

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
2,954 C. feet.	Excavation for foundations ...	...	1,000 C. feet.	...
1,056 ,,	Earth-filling in basement... ...	...	,,	...
537 ,,	Concrete	...	100 C. feet.	...
1,135 ,,	Brickwork in foundations ...	...	,,	...
599 ,,	Do. in basement	...	,,	...
2,430 ,,	Do. in superstructure ...	...	,,	...
94 ,,	Archwork	...	,,	...
43 ,,	Cut-stone work	...	C. foot.	...
129 ,,	Teakwood wrought and put up ...	...	,,	...
20 lb.	Wrought-iron work	...	lb.	...
64 Sq. feet.	Venetian and panel doors with frames	...	Sq. foot.	...
70 ,,	Venetian windows with frames ...	...	,,	...
70 ,,	Glazed windows with frames and iron bars for record-room ...	...	,,	...
12½ ,,	Glazed ventilators in gables ...	...	,,	...
12·89 Squares.	Tiled roofing with flat and pan tiles including teak reepers ...	...	Square.	...

ABSTRACT—*cont.*

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
6·87 Squares.	Flooring with 8-inch square bricks.	...	Square.	...
39·46 ,,	Plastering with two coats	...	,,	...
12 L. feet.	Wooden railing	...	L. foot.	...
9·08 Squares.	Painting doors, windows and exposed wood-work with three coats of Carson's oak paint.	...	Square.	...
10·65 ,,	Wood-oiling roof-timbers, &c., three coats.	...	,,	...
	Contingencies at 5 per cent. ...	...	...	...
	Total ...	...	...	...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

2460
11

ESTIMATE of the Cost of constructing a Registrar's Office with tiled roofing according to Standard Sheet No. 20, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls	...	149 0	4 6	4 6	3,017	
Partition	...	27 0	3 8	4 6	446	
Verandah walls...	...	44 9	3 6	4 6	705	
Steps	...	15 0	3 0	1 0	45	
Cubic feet ...	...	...	...	...	4,213	
Earth-filling in Basement.						
Rooms	...	30 0	40 0	1 6	1,800	
Platform	...	11 6	20 0	1 0	230	
Verandah	...	31 9	7 0	1 6	333	
Cubic feet ...	...	...	...	...	2,363	
Concrete.						
Outer walls	...	149 0	3 6	1 0	522	
Partition	...	28 0	2 8	1 0	75	
Verandah walls	...	45 9	2 6	1 0	114	
Steps	...	15 0	3 0	1 0	45	
Cubic feet ...	...	...	...	...	756	
Brickwork in Foundations.						
Footing course—	...	149 0	2 8	1 6	596	
Outer walls	...	28 10	1 10	1 6	79	
Partition	...	46 7	1 6	1 6	105	
Verandah walls	...					
Above footing to ground level—		149 0	2 3	2 0	671	
Outer wall	...	29 3	1 6	2 0	88	
Partition	...	47 0	1 0	2 0	94	
Verandah wall	...					
Cubic feet ...	...	...	...	...	1,633	
Brickwork in Basement.						
Outer walls	...	149 0	2 3	2 0	671	
Partition	...	29 3	1 6	2 0	88	
Verandah walls	...	47 0	1 0	2 0	94	
Steps	..	15 0	3 0	0 6	23	
Do.	...	13 0	2 0	0 6	13	
Do.	...	11 0	1 0	0 6	6	
					895	
Deduct stone in steps and under posts as per details.	...	...	...	...	33	
Cubic feet ...	...	...	...	...	862	
Brickwork in Superstructure.						
Outer walls	...	149 0	1 6	14 0	} 3,759	
Partition	...	30 0	1 6	14 0		

2460. 12

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure—cont.						
Gables	3	33 0	1 6	5 3	780	
Over gable end	2	40 0	1 6	0 9	90	
Corbels	12	1 0	0 6	1 6	9	
Band over verandah roof	...	33 0	0 3	0 9	6	
						4,644
Deductions—						
Doors	2	4 0	1 6	8 0	96	
Windows	12	3 6	1 6	5 0	315	
Ventilators	4	3 6	1 6	2 3	47	
Archwork as per details	...	...	...	...	108	
						566
Cubic feet ...	...	...	...	...	...	4,078
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0	16	
Do. do. windows ...	8	4 9	1 6	1 0	57	
Semicircular arches for gable ventilators.	2	11 9	1 6	1 0	35	
Cubic feet ...	...	...	...	...	108	
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps	...	45 0	1 3	0 6	28	
Slabs under beams	3	3 0	2 0	0 4	} 14	
Do.	6	2 0	2 0	0 4		
Cubic feet ...	...	...	...	...	47	
Teakwood.						
Purlins and ridge	6	22 3	0 9	1 2	117	
Wall plates	2	44 6	0 3	0 3	6	
Rafters	60	22 6	0 3	0 5	141	
Struts	60	2 6	0 3	0 3	9	
Uprights, double	120	3 2	0 1½	0 3½	14	
Eaves board	2	45 9	0 ¾	0 6	3	
Verandah posts	4	0 6	0 6	7 4½	7	
Do. breastsummers	3	11 0	0 6	0 9	12	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	23	10 9	0 3	0 5	26	
Do. wall-plate	1	33 0	0 3½	0 5	4	
Do. eave board	1	33 0	0 ¾	0 6	1	
Cubic feet ...	...	..	...	...	342	
Wrought iron work.						
¾″ diameter bolts to secure verandah wall-plate.	6	1 9	=10 6	× 1·47	=15·43	
⅜″ hex. nuts and heads	6	...	...	× ·43	= 2·58	
⅜″ × 3″ × ⅛″ washers for heads ...	6	...	...	× ·31	= 1·86	
lb. ...	...	...	...	...	19·87	
Say lb. ...	...	...	...	...	...	20

12

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	6	3 6	...	5 0	105	Sq. feet.
Windows with glazed shutters and frames and $\frac{3}{4}$" square iron bars.						
For record-room	6	3 6	...	5 0	105	Sq. feet.
Glazed ventilators with frames.						
At sides	4	3 6	...	2 3	31½	
At gables	8	1 3	...	1 3	12½	
Square feet ...	...	...	...	...	44	
Tiled roofing.						
Over rooms	...	45 9	...	46 0	2,105	
Over verandah	...	33 0	...	10 9	355	
Square feet ..	...	...	...	...	2,460	
Squares ...	...	...	...	...	...	24·60
Flooring with 8-inch square bricks over a levelling course of wall bricks.						
Rooms	...	40 0	...	30 0	1,200	
Verandah	...	33 9	...	8 0	270	
Door pieces	2	4 0	...	1 6	12	
					1,482	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	1,473	
Squares ...	...	...	...	...	...	14·73
Plastering with two coats.						
Interior—						
Rooms	2	100 0	...	14 0	2,800	
Gables	4	30 0	...	5 3	630	
Exterior—						
Basement all round	...	173 3	...	2 4½	411	
Superstructure	...	155 0	...	14 0	2,170	
Gables	2	33 0	...	5 6	363	
Wall over do.	2	40 0	...	3 0	240	
Door jambs	2	20 0	...	1 6	60	
Window do.	8	17 0	...	1 6	204	
Do.	4	13 6	...	1 6	81	
Ventilator do	4	8 0	...	1 6	48	
Deductions—						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	12	3 6	...	5 6	462	
Ventilators ... ... 2 ×	4	3 6	...	2 3	63	
						653
Square feet ...	...	...	...	...	...	6,354
Squares ...	...	...	...	...	...	63·54

2460.
13

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Wooden railing.						
For Clerks' room ... ... Lineal feet	...	...	...	...	20	
Painting doors, windows and exposed woodwork with three coats of Carson's oak paint.						
Venetian doors	3	64 0	...	...	192	
Do. windows	3	105 0	...	...	315	
Glazed windows with iron bars ...	2	105 0	...	...	210	
Do. ventilators	...	...	...	...	44	
Struts	60	2 6	...	1 0	150	
Uprights	120	3 2	...	0 8½	269	
Eaves board	2	45 9	...	0 10½	80	
Verandah posts	4	2 0	...	7 4½	59	
Brackets	6	1 0	...	1 0	6	
Eave board	1	33 0	...	0 10½	29	
Square feet ...	...	...	...	...	1,354	
Squares ...	...	...	...	...	...	13·54
Wood-oiling, three coats.						
Railing	2	20 0	...	3 0	120	
Purlins and ridge	6	22 3	...	3 1	412	
Rafters	60	22 6	...	1 1	1,463	
Breastsummers	3	11 0	...	2 0	66	
Rafters	23	10 9	...	1 1	268	
Wall-plate	1	33 0	...	1 1½	37	
Square feet ...	...	...	...	...	2,366	
Squares ...	...	...	...	...	...	23·66

ABSTRACT.

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
4,213 C. feet.	Excavation for foundation	...	1,000 C. feet.	...
2,363 „	Earth-filling in basement	...	„	...
756 „	Concrete	...	100 „	...
1,633 „	Brickwork in foundations	...	„	...
862 „	Do. in basement	...	„	...
4,078 „	Do. in superstructure	...	„	...
108 „	Archwork	...	„	...
47 „	Cut-stone work	...	C. foot.	...
342 „	Teakwood wrought and put up ...	...	„	...
20 lbs.	Wrought-ion work	...	lb.	...
64 S. feet.	Venetian and panel doors with frames.	...	Square foot.	...
105 „	Venetian windows with frames ...	...	„	...
105 „	Glazed windows with frames and iron bars for record room	...	„	...
44 „	Glazed ventilators	...	„	...

13

ABSTRACT.—*cont.*

Quantity.		Item.	Rate.	Per	Amount.
			RS. A. P.		RS. A. P.
24·60	Squares.	Tiled roofing with flat and pan tiles including teak reepers	...	Square.	...
14·73	,,	Flooring with 8-inch square bricks ...	...	,,	...
63·54	,,	Plastering with two coats	...	,,	...
20	L. feet.	Wooden railing	...	L. foot.	...
13·54	Squares.	Painting with three coats of Carson's paint	...	Square.	...
23·66	,,	Wood-oiling roof timbers, three coats	...	,,	...
...		Contingencies at 5 per cent.	...	...	...
		Total ...	...		...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

DEPARTMENT PUBLIC WORKS.

2460/14

REGISTRAR'S AND SUB-REGISTRAR'S OFFICES WITH TILED ROOFING.

Specification of works to be performed in executing the Standard Designs for Registrar's and Sub-Registrar's Offices, according to Drawing Sheets, Nos. 20 and 22, signed by the Officiating Consulting Architect on the 16th September 1881.

EXCAVATOR.

Clearing site—Take down any existing building on the site, stacking such materials as it may be desirable to use again.

Excavation.—After the centre lines have been pegged and lined, set out on either side of the lines half the total breadth of the foundations and excavate to the depth or depths shown on the drawing, or to such depth as the officer in charge of the works may direct.

Slips and Baling.—If slips occur during the progress of the works clear the material away and bale any water lodging in the trenches from a hole or holes made without the limits of the same.

Ramming.—After the officer in charge of the work has seen that the trenches are the full and proper widths and depths, well ram the bottom with heavy beaters for the after reception of the concrete.

BRICKLAYER.

Concrete.—Lay over the full breadth of the trenches about 9 inches of concrete as hereinafter specified and well ram with heavy beaters to a thickness of about 6 inches. After the first layer has consolidated lay a second and execute as before. The complete concrete should be about 12 inches thick.

Brickwork.—Mark off carefully the centre lines and lay off the thickness of the footing course according to the plan.

The brickwork will be executed in sound material, and care will be taken to insert during the progress of the work the door and window frames, wood-bricks for railing, &c.

The walls will be two bricks thick, about 18 inches.

Splays.—The openings will be splayed as shown on the plan.

Arching.—The heads of the openings will be covered by segmental arches built in concentric rings clear of the frame. The space between the arch and the top of the frame will be carefully closed in after the brickwork has settled down.

Bond.—The bond should be English if possible.

Stones.—Set the stones under the verandah posts, also those under the beams and fasten properly. All wood supplied by the carpenter.

STONE MASON.


Provide and dress two lines No. 4 stones 1′ 6″ × 1′ 6″ × 6″ with mortice holes 2″ square and 2″ deep to receive the verandah posts.

Steps.—Provide and dress two lines, the steps shown on the drawing, tailing each stone not less than three inches.

CARPENTER.

NOTE.—*Vary this clause to suit Registrar's and Sub-Registrar's Offices.*—Supply beams——— × ——— × ——— supply rafters ——— × ——— × ——— supply doors windows and ventilators as shown on the drawing, neatly rebated and morticed in a workmanlike manner.

The rafters will be notched over the beams and project 2 feet 6 inches from the face of the wall and strutted as shown on the drawing.

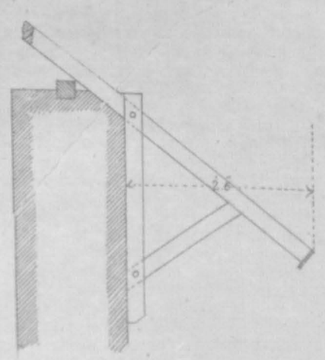

14

ROOFING.

Tiling.—Cover the roof with well burnt flat and pan tiles laid in the usual manner and the ridge with tiles specially made for the purpose.

Chunam bands.—Protect the ridge with chunam and lay bands on the tiling ——— inches broad and ——— inches apart rough cast on the surface.

FLOORING.

After the surface has been brought up to the proper level lay an even floor of 8-inch square tiles set diagonally. The tiles will be rubbed on the surface and gauged to fit each other.

PLASTERER.

Plaster the whole of the interior and exterior with two coats of plaster. (See Specification Standard Design for Police Stations, dated 15th January 1881.)

MATERIALS.

The bricks will be cast in a mould ——— inches × ——— inches × ——— inches, well burnt and free from defects.
The timber will be well seasoned and free from defects.
The lime will be collected at ——— properly burnt and slaked.
The sand will be collected at ——— .

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

2460. 75

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

14th January 1882, No. 120 W.

Buildings and Roads.
Civil Works.

Read the following papers :—

No. 69. From Major A. T. FRASER, R.E., Officiating Consulting Architect to Government, to the Chief Engineer, Public Works Department, dated Chepauk, 16th September 1881, No. 465.

I HAVE the honor, in terms of G.O., No. 1783 W., of the 21st July, to forward the following standard designs for Registrar's and Sub-Registrar's Offices prepared in accordance with the sketch plan herewith enclosed for reference, which was approved in the Judicial Department, dated 20th January 1881 :—

Standard design, Registrar's Office, terraced building.
Do. do. do. tiled building.
Do. Sub-Registrar's Office, terraced building.
Do. do. do. tiled building.

2. As it is understood Superintending Engineers are waiting for these standard plans, I have had to supply the Superintending Engineer, Second Circle, with copies in anticipation ; it is considered unadvisable to retain them till the quantities are taken out.

This will be done and a specification furnished when the plans are returned from the Lithographic Press.

SUBMITTED for the approval of Government in the Judicial Department, and for the countersignature of the Inspector-General of Registration.

19th September 1881. (Signed) J. PENNYCUICK, Major, R.E.,
Deputy Chief Engineer, P.W.D.

To the Judicial Department, with the letter above quoted
and five enclosures (requested to be returned).

No. 69-A. Proceedings of the Madras Government in the Judicial Department, dated 9th November 1881, No. 2283.

From the Public Works Department, dated 19th September 1881, No. 2150.

From the Inspector-General of Registration, Madras, dated 14th October 1881, No. 670.

THE plans are approved and returned with the countersignature of the Inspector-General of Registration.

(True Extract.)

(Signed) R. DAVIDSON,
Chief Secretary.

15

No. 69-B. From R. F. CHISHOLM, Esq., Consulting Architect to Government, to the Chief Engineer, Public Works Department, dated Chepauk, 20th December 1881, No. 736.

IN continuation of this office letter, No. 465, dated 16th September, I have the honor to forward specifications and detailed quantities for the tiled and terraced standard designs for Registrar's and Sub-Registrar's Offices.

Two Specifications.
Four Detailed Estimates.

No. 70. ORDER THEREON, 14th January 1882, No. 120 W.

THE standard designs for Registrar's and Sub-Registrar's Offices, which have been approved in the Judicial Department, will be lithographed and the estimates and specifications printed for circulation and adoption in the department.

(True Extract.)

(Signed) R. H. SANKEY, Colonel, R.E.,
Secretary to Government, P.W.D.

To Superintending Engineers.
To the Consulting Architect to Government.
" Judicial Department.

Exd. A. Aubert.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1882} Madras.

PUBLIC WORKS.

Dated January, 14*th*.

Read. *Encl.*

G.O., 14th Jan. 1882, No. 120 W.

JANUARY.

Nos. 69-70.

Registrar's and Sub-Registrar's Offices.—The standard designs for —, ordered to be lithographed and circulated for adoption in the Public Works Department.

3460-17

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads
Civil Works.

READ—the following letter from G. HAMNETT, Esq., Inspector-General of Registration, to the Officiating Chief Secretary to Government, dated Madras, 24th December 1883, G. No. 3266 :—

With reference to the Proceedings of the Government, Judicial Department, No. 2130, dated the 15th October 1881, sanctioning the appointment of special officers to the sub-registry offices at Nandikótkur and Cumbum, I have the honor to state that I inspected these offices last month and found that it was absolutely necessary, if registration is to be advanced, that suitable office accommodation should be provided at each station.

2. The sub-registrar at Nandikótkur holds his office in a store-room lent to him by the tahsildar, and the sub-registrar at Cumbum in a rented house situated in a noisy bazaar street.

3. I request that you will be pleased to obtain the sanction of the Government for the construction of offices at both stations on the standard terraced design.

4. At Nandikótkur the office may be built close to the taluk cutcherry. At Cumbum the best site would be the one chosen by Mr. Glenny for the construction of the several public offices.

No. 17, Judicial.

Approved and transferred to the Public Works Department.

(By Order.)

7th January 1884. (Signed) M. HAMMICK,
Ag. Assistant Secretary.

ORDER—dated 10th January 1884, No. 54 W., Public Works.

Communicated to the Superintending Engineer, III Circle, for submission of the requisite estimates.

(True Extract.)

(Signed) J. SHAW-STEWART, Colonel, R.E.,
Secretary to Govt., P.W.D.

To the Superintending Engineer, III Circle.
„ Judicial Department.

Exd. E. Fernandez.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1884} Madras.

PUBLIC WORKS.

Dated January, 10th.

Recd. *Encl.*

G.O., 10th Jan. 1884, No. 54 W.

JANUARY.

Sub-registry Offices

The Superintending Engineer, III Circle, directed to submit the requisite estimates for the construction of — at Cumbum and Nandikótkur, Kurnool district.

W.O.

Sanction.

CL

3. 10. 84

Public Works Department, 1884-85.

2460/18

Current No. 8231

Letter No. 2186

Dated the 25th September 84

From the Judicial Department

NOTE OF REMARKS.

1. This estimate provides for constructing a Sub-Registrar Office at Cumbum in the Kurnool District, and it amounts to Rs. 2,183. A site plan is submitted.

2. Except a trifling difference in foundations and a certain substitution of 'pointing' for 'plaster', the estimate now submitted accords in all particulars with the standard sanctioned in G.O. No. 120 W. of the 14th Jan. 82.

3. Foundation basement and superstructure are to be of rubble stone in mortar. Two weather boards have been provided.

4. The estimate has been countersigned by the Inspr. Genl. of Registration.

3/4

3rd Octr. 84

B

101

No. 1076

SUPERINTENDING ENGINEER'S OFFICE,
of Kistnapuram 3RD CIRCLE
~~Bellary~~ 2nd Sept. 1884

From

Lt Col. H. M. Vibart R.E.
SUPERINTENDING ENGINEER,
IIIRD CIRCLE

2460/19

To,

THE Inspector General
of Registration
Madras

SIR,

Enclosures,

With reference to G.O. No. 54 W dated 10th January 1884, I have the honor to forward for countersignature and transmission to Government, an Estimate amounting to Rs 2183 for constructing a Sub Registrar's Office at Cumbhum with terraced Roof as per Standard Design approved of in G.O. No. 120 W dated 14th January 1882.

2. The site chosen for the Sub Registrar's Office is on ground near the Village of Boolawarpett, the locality recommended by Mr Glenny for Public Offices. The Collector observes ~~that~~

~~the Registrar~~ that the Registrar's Office should be near the Taluq Cutcherry, and till a Taluq Cutcherry is built at Bestawarpett, the erection of a Sub Registrar's Office would be a mistake.

I have the honor to be
Sir
Your most obedt. servant
[illegible]
Lieut. Col. R.E.
Superg. Engineer
3rd Circle

p 2

R. No. 3779, 12th September 1884.
Endorsement.

Submitted for the sanction of the Government. It will be some time before funds will be allotted. In the meanwhile the question of the site on which the Office should be built can be settled. I mentioned in my letter R. No. 5266 dated the 24th December 1883 that "the best site would be the one chosen by Mr Glenny for the construction of the several public offices," but if these offices are not to be built within any reasonable time, the proposed new Office may be built on

p 3

some eligible site in the town of Coimbatore, as it is of the greatest importance that the records should be lodged & secured in a proper building.

W. A. [illegible]
Inspr. Genl. of Registration

To the Chief Secretary
to the Government.

2460/20

Regn (1884) Sepr
(Office Accom)

From,

The Superintending Engineer,

IIIrd Circle.

To,

The

Dated 2
Received 6 } September 1884.

ENCLOSURES.

6591

No. 1076

Forwarding for countersignature & transmission to Govt. plan & estimate for constructing a S.R.C. at Cumbum with remarks regarding its site.

4

2460/21

21

Mi fr 242 – 29-1-84
Br 52 W – 10-1-84 | 5

M

9th 25/9

Approved
and transferred
to the Public Works
Department. The Office
should not be commenced without previously
consulting (by the I.G. as to the site)
(sites)

[illegible]
Ag: Under Secretary

JW

To
the P.W. Dept.

G.O. 54 W a/10-1-84
" 120 W a/14-1-82

19/9/84

A

No. 2260 W

Public Works Department.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

Under date the 6th October/84

Read the following

From the Inspector General of Registration H.E. No. 3779 dated 12th Septr/84.
Endorsement thereon by the Judicial Deptt. H.E. No. 2186 dated 26th Septr/84.

6

The estimate amounting to Rs. 2,183, for constructing a Sub Registrar's office at Kumbum in the Kurnool District, is sanctioned, for execution when funds are available.

2. The question as to site should be settled by the Suptg. Engineer in communication with the Inspector General of Registration.

3. This sanction has been registered as Provincial No. 165 W of 1884-85, and classified as Civil buildings, Original Works –

To
The Suptg. Engr: III Circle with 4 enclos:
" Examiner P.W. Accts
" Judicial Deptt.

C.B.
4.10.84

22

8231

Govt. of (1884) Madras.

PUBLIC WORKS.

231

Dated 7/10/84

Read. Read.

G.O. 6 Oct 1884, No. 2460