31

(1) Number of pages 48

(2) Date of repair 13-8-87

(3) Initials of the Referencer

TAMIL NADU ARCHIVES

GOVERNMENT OF TAMIL NADU

P. W. D DEPARTMENT

G.O. No. / B.P. No.	856. W	Press. / Mis.
Dated	28 - 3 - 1884	198 .

Gs. 8

22,23
2

Not to be folded or roughly handled.

23 + 1 12A.

Archives —1 10,006-9 88

24

856/1

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following letter from Colonel J. BEATTY, R.E., Superintending Engineer, IV Circle, to the Inspector-General of Registration, dated Coimbatore, 19th March 1884, No. 73 M. :—

With reference to G.O., No. 1658 W., of 13th June 1883, I have the honor to forward, for transmission to Government for sanction, a site plan and an estimate, amounting to Rs. 3,370, with a report and duplicate abstract estimate for constructing a sub-registrar's office at Udipi, in the South Canara district.

2. The office will be built in accordance with the standard design sheet No. 22, circulated with G.O., No. 120 W., of 14th January 1882, with certain slight deviations, as follow, to suit the locality, viz. :—

I. The depth of concrete in foundation is increased from 1 foot to 1½ feet, and the corresponding depth in masonry is reduced from 3½ to 3 feet.
II. The breadth of the verandah-wall is increased from 1 foot to 1½ feet, to suit the size of the laterite stones available.
III. Glazed shutters are provided inside the venetian windows.
IV. Weather-boards have been allowed over windows in office and record rooms.

No. 710 G.N.

Submitted for the sanction of the Government.

2. It is very desirable, after what has happened recently at Bellary, that the windows in the office-room should be well secured by bolts and battens.

MADRAS,
21st March 1884.

(Signed) G. HAMNETT,
Inspector-General of Registration.

To the Chief Secretary to Government.

No. 699, Judicial.

Transferred to the Public Works Department.
(By Order.)

26th March 1884.

(Signed) M. HAMMICK,
Ag. Assistant Secretary.

ORDER—dated 28th March 1884, No. 856 W., Public Works.

The estimate, amounting to Rs. 3,370, for constructing a sub-registrar's office at Udipi, in the South Canara district, is sanctioned, for execution when funds are available.

2. The attention of the Superintending Engineer is called to the suggestion of the Inspector-General of Registration.

3. This sanction has been registered as Provincial No. 246 W. of 1884-85, and classified as Civil Buildings, Original Works.

(True Extract.)

Major, R.E.,
Under Secy. to Govt., P.W D.

To the Superintending Engineer, IV Circle, with three enclosures.
" Examiner, Public Works Accounts, with duplicate abstract estimate.
" Judicial Department.

Exd. E. Fernandez.
Spare Copies

856/2

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1884} Madras.

PUBLIC WORKS.

Dated March, 28th.

Recd. *Encl.*

G.O., 28th March 1884, No. 856 W.

MARCH.

Sub-registrar's Office at Udipi

Estimate, amounting to Rs. 3,370, for constructing a —, in the South Canara district, sanctioned.

856/3

13TH JUNE 1883, No. 1658 W., PUBLIC WORKS.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following letter from G. HAMNETT, Esq., Inspector-General of Registration, to the Chief Secretary to Government, Public Department, dated Ootacamund, 6th May 1883, No. 976 T. :—

In the Proceedings of the Government, Judicial Department, No. 616, Miscellaneous, dated the 3rd March 1883, sanction was granted for renting a building for the Sub-Registry Office at Udipi, in the district of South Canara, temporarily, until the repairs of the Taluk Cutcherry were completed.

2. The Sub-Registrar has now sent up the enclosed sketch plan of the Taluk Cutcherry, showing the portion allotted to him, 18 feet by 18 feet, and states that he experiences considerable difficulty in carrying on his work within this small space. He adds that a separate building is absolutely required for the following reasons :—

"(1.) That there is no sufficient and secure place to keep the records free from damp and dust.

(2.) That the Sub-Registrar and his establishment sit within elbow's distance from each other.

(3.) That there is scarcely a decent space left for the parties to wait.

(4.) That there is no verandah attached to the office where parties can sit.

(5.) That parties dislike the idea of the contents of their documents being known to outsiders, who also come to the office on business.

(6.) That as there is no separate accommodation, it is not possible to prevent the public from entering the office, when any inquiry is being held under Section 34 of the Act (Rule 9)."

3. Agreeing with the Sub-Registrar, I have the honor to recommend that the sanction of the Government may be procured for the construction of a separate office, on the standard design, for the Sub-Registrar of Udipi.

No. 1480, Judicial.

Sanctioned and transferred to the Public Works Department.

FORT ST. GEORGE,
5th June 1883.

(Signed) M. HAMMICK,
Acting Assistant Secretary.

ORDER—dated 13th June 1883, No. 1658 W., Public Works.

Communicated to the Superintending Engineer, Fourth Circle, for submission of the requisite estimate.

(True Extract.)

(Signed) R. H. SANKEY, Colonel, R.E.,
Secretary to Govt., P.W.D.

To the Superintending Engineer, Fourth Circle.
" Inspector-General of Registration.
" Judicial Department.

Exd. A. Aubert.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1883} Madras.

PUBLIC WORKS.

Dated June, 13th.

Read. *Encl.*

G.O., 13th June 1883, No. 1658 W.

JUNE.

Sub-Registrar's Office

An estimate for a new — at Udipi, in the South Canara District, ordered to be submitted.

8576/4

ESTIMATE of the Cost of constructing a Sub-Registrar's Office with terraced roofing according to Standard Design, Sheet No. 21, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls		99 0	4 6	4 6	2,005	
Partition		21 0	3 8	4 6	347	
Verandah walls		35 9	3 6	4 6	563	
Steps		13 0	3 0	1 0	39	
Cubic feet					2,954	
Earth-filling in Basement.						
Rooms		24 0	21 0	1 6	756	
Platform		12 0	8 6	1 0	102	
Verandah		25 9	5 1½	1 6	198	
Cubic feet					1,056	
Concrete.						
Outer walls		99 0	3 6	1 0	347	
Partition		22 0	2 8	1 0	59	
Verandah walls		36 9	2 6	1 0	92	
Steps		13 0	3 0	1 0	39	
Cubic feet					537	
Brickwork in Foundations.						
Footing course—						
Outer walls		99 0	2 8	1 6	396	
Partition		22 10	1 10	1 6	63	
Verandah wall		37 7	1 6	1 6	85	
Above footing to ground level—						
Outer wall		99 0	2 3	2 0	445	
Partition		23 3	1 6	2 0	70	
Verandah wall		38 0	1 0	2 0	76	
Cubic feet					1,135	
Brickwork in Basement.						
Outer walls		99 0	2 3	2 0	446	
Partition		23 3	1 6	2 0	70	
Verandah wall		38 0	1 0	2 0	76	
Steps		13 0	3 0	0 6	20	
Do.		11 0	2 0	0 6	11	
Do.		9 0	1 0	0 6	5	
					628	
Deduct stone in steps and under posts as per details					29	
Cubic feet					599	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure.						
Outer walls		99 0	1 6	12 0	} 2,214	
Partition		24 0	1 6	12 0		
Parapet		101 0	1 0	0 6	51	
Do.		100 0	0 9	1 0	75	
Do.		101 0	1 0	0 4	34	
Binding wall		25 0	1 6	0 9	28	
						2,402
Deductions—						
Doors	2	4 0	1 6	8 0	96	
Windows	9	3 6	1 6	5 0	236	
Archwork as per details	...	...	...	...	45	
						377
Cubic feet ...	...	...	...	...	...	2,025
Archwork.						
Segmental arch over doors	2	5 3	1 6	1 0	16	
Do. do. windows ...	4	4 9	1 6	1 0	29	
Cubic feet ...	...	..	...	...	45	
Cut-stone work under Posts and in Steps.						
Under posts	4	1 6	1 6	0 6	5	
Steps	...	39 0	1 3	0 6	24	
Cubic feet ...	...	...	...	...	29	
Teakwood.						
Clerks and Registrar's room joists ...	17	15 6	0 3	0 7½	41	
Record-room joists	17	12 6	0 3	0 6	} 39	
Small joists under coping at sides ...	32	2 7½	0 3	0 6		
Do. do. at angles ...	4	3 6	0 3	0 6		
Waling pieces	2	28 0	0 2	0 6	} 10	
Do.	2	29 6	0 2	0 6		
Verandah posts	4	0 5	0 5	7 4½	5	
Do. breastsummers	3	9 1½	0 5	0 7½	7	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	19	8 0	0 2½	0 3½	9	
Do. wall-plate	1	27 0	0 3	0 5	3	
Do. eave board	...	27 0	0 4	0 ¾	1	
Cubic feet ...	...	...	...	...	117	
Wrought-iron Work.						
¾" diameter bolts to secure wall-plates.	6	1 9=	10 6	× 1·47	15·43	
¾" hex. nuts and bolt heads for do.	6	...	...	× ·43	2·58	
¾" × 3" × ⅛" washers for do.	6	...	...	× ·31	1·86	
lb. ...	...	..	...	...	19·87	
Say lb. ...	...	...	...	...	...	20
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	4	3 6	...	5 0	70	Do.

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Windows with glazed shutters and frames with ¾" square iron bars for Record-room.	5	3 6	...	5 0	88	Sq. feet.
Terrace roofing	...	30 0	...	28 6	855	Do.
Squares ...	...	...	...	...	...	8·55
Slope terracing for verandah	...	27 0	...	8 0	216	Sq. feet.
Squares ...	...	...	...	...	...	2·16
Flooring with 8-inch square bricks over a levelling course.						
Clerks and Registrar's room	...	24 0	...	12 0	288	
Record-room	...	24 0	...	9 0	216	
Verandah	...	27 9	...	6 6	180	
Door pieces	2	4 0	...	1 6	12	
					696	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	687	
Squares ...	...	...	..	...	...	6·87
Plastering with two coats.						
Interior—						
Clerks and Registrar's room		72 0	...	12 0	864	
Record-room		66 0	...	12 0	792	
Exterior—						
Basement all round		120 3	...	2 4⅓	286	
Superstructure		105 0	...	12 0	1,260	
Parapet		101 0	...	5 0	505	
Binding wall		25 0	...	3 0	75	
Door jambs	2	20 0	..	1 6	60	
Window jambs	4	17 0	...	1 6	102	
Do.	5	13 6	...	1 6	101	
						4,045
Deductions.						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	9	3 6	...	5 0	315	
						443
Square feet ...	...	...	...	...	...	3,602
Squares ...	...	...	...	...	...	36·02
Plaster cornice exterior.						
Ends of terrace... ... Lineal feet.	...	...	...	...	114	
Wooden railing for Clerks' room... L. ft.	...	...	...	...	12	
Painting doors, windows and exposed woodwork with three coats of Carson's paint.						
Venetian and panel-doors	3	64 0	...	...	192	
Do. windows ...	3	70 0	...	...	210	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting doors, windows and exposed woodwork with three coats of Carson's paint—cont.						
Glazed windows with iron bars ...	2	88 0	...	...	176	
Waling pieces	...	115 0	...	1 2	134	
Verandah posts	4	1 8	...	7 4½	49	
Brackets	6	1 0	...	1 0	6	
Eaves board	...	27 0	...	0 8	18	
Square feet ...	...	...	...	...	785	
Squares ...	...	...	...	...	...	7·85
Wood-oiling three coats.						
Railing	2	12 0	...	3 0	72	
Joists	17	15 6	...	1 6	395	
Do.	17	12 6	...	1 3	266	
Do.	32	2 7½	...	1 2	} 114	
Do.	4	3 6	...	1 2	}	
Breastsummers	...	27 0	...	1 8	45	
Rafters	19	8 0	...	0 9½	120	
Wall-plate	...	27 0	...	0 8	18	
Square feet ...	...	...	...	...	1,030	
Squares ...	...	...	...	...	...	10·30

ABSTRACT.

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
2,954 C. feet.	Excavation for foundations ...	...	1,000 C. feet.	...
1,056 „	Earth-filling in basement ...	...	„	...
537 „	Concrete	...	100 „	...
1,135 „	Brickwork in foundations ...	...	„	...
599 „	Do. in basement	...	„	...
2,025 „	Do. in superstructure ...	...	„	...
45 „	Archwork	...	„	...
29 „	Cut-stone work	...	C. foot.	...
117 „	Teakwood wrought and put up ...	...	„	...
20 lb.	Wrought-iron work	...	lb.	...
64 S. feet.	Venetian and panel doors with frames.	...	S. foot.	...
70 „	Venetian windows with frames ...	...	„	...
88 „	Glazed windows with frames and iron bars for Record-room.	...	„	...
8·55 Squares.	Terrace roofing	...	Square.	...
2·16 „	Slope terracing	...	„	...
6·87 „	Flooring with 8-inch square bricks.	...	„	...
36·02 „	Plastering with two coats... ...	...	„	...
114 L. feet.	Plaster cornice exterior	...	L. foot.	...
12 „	Wooden railing	...	„	...
7·85 Squares.	Painting doors and windows and other exposed woodwork with three coats of Carson's oak color.	...	Square.	...

856/88

ABSTRACT—*cont.*

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
0 ·30 Squares.	Wood-oiling roof timbers, &c., with three coats.	...	Square.	...
	Contingencies at 5 per cent. ...	...	...	...
	Total ...	...	...	...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

ESTIMATE of the Cost of constructing a Registrar's Office with terraced roofing according to Standard Design, Sheet No. 19, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls		149 0	4 6	4 6	3,017	
Partition		27 0	3 8	4 6	446	
Verandah walls		44 9	3 6	4 6	705	
Steps		15 0	3 0	1 0	45	
Cubic feet					4,213	
Earth-filling in Basement.						
Rooms		30 0	40 0	1 6	1,800	
Platform		11 6	20 0	1 0	230	
Verandah		31 9	7 0	1 6	333	
Cubic feet					2,363	
Concrete—						
Outer walls		149 0	3 6	1 0	522	
Partition		28 0	2 8	1 0	75	
Verandah walls		45 9	2 6	1 0	114	
Steps		15 0	3 0	1 0	45	
Cubic feet					756	
Brickwork in Foundations.						
Footing course—						
Outer walls		149 0	2 8	1 6	596	
Partition		28 10	1 10	1 6	79	
Verandah walls		46 7	1 6	1 6	105	
Above footing to ground level—						
Outer walls		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah walls		47 0	1 0	2 0	94	
Cubic feet					1,633	
Brickwork in Basement.						
Outer walls		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah walls		47 0	1 0	2 0	94	
Steps		15 0	3 0	0 6	23	
Do.		13 0	2 0	0 6	13	
Do.		11 0	1 0	0 6	6	
					895	
Deduct stone in steps and under posts as per details.					33	
Cubic feet					862	

856/7

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure.						
Outer walls		149 0	1 6	14 0	3,759	
Partition		30 0	1 6	14 0		
Corbels	8	1 0	0 6	1 6	6	
Parapet		151 0	1 0	0 6	76	
Do.		150 0	0 9	1 0	113	
Do.		151 0	1 0	0 4	50	
Binding wall		31 0	1 6	0 9	35	
						4,039
Deductions—						
Doors	2	4 0	1 6	8 0	96	
Windows	13	3 6	1 6	5 0	341	
Ventilators	7	3 6	1 6	2 3	83	
Archwork as per details					59	
						579
Cubic feet						3,460
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0	59	C. feet.
Do. windows	6	4 9	1 6	1 0		
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps		45 0	1 3	0 6	28	
Slabs under beams	2	3 0	2 0	0 4	4	
Do.	4	2 0	2 0	0 4	5	
Cubic feet					42	
Teakwood.						
Beams	4	22 3	0 10	1 5	105	
Joists	56	12 3	0 3	0 6		
Do.	28	10 9	0 3	0 6		
Do. small under coping	42	2 $7\frac{1}{2}$	0 3	0 6	139	
Do. angle do.	4	3 6	0 3	0 6		
Waling pieces	2	35 3	0 2	0 6		
Do.	2	47 0	0 2	0 6	14	
Verandah posts	4	0 6	0 6	7 $4\frac{1}{2}$	7	
Do. breastsummers	3	11 0	0 6	0 9	12	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	23	9 9	0 3	0 4	19	
Do. wall-plate		33 0	0 $3\frac{1}{2}$	0 5	4	
Do. eave board		33 0	0 $\frac{3}{4}$	0 6	1	
Cubic feet					303	
Wrought-iron work.						
$\frac{3}{4}$″ bolts to secure verandah wall-plate.	6	1 9	=10 6	×1·47	15·43	
$\frac{3}{4}$″ hex. nuts and heads	6			×·43	2·58	
3″ × 3″ $\frac{1}{8}$″ washers	6			×·31	1·86	
lb					19·87	
Say lb.						

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	6	3 6	...	5 0	105	Do.
Windows with glazed shutters and frames and $\frac{3}{4}$" square iron bars for Record-room.	7	3 6	...	5 0	123	Do.
Glazed ventilators	7	3 6	...	2 3	55	Do.
Terrace roofing	...	36 0	...	47 6	1,710	Do.
Squares ...	...	...	...	...	...	17·10
Slope terrace for verandah	...	33 0	...	9 9	322	Sq. feet.
Squares ...	...	...	...	...	...	3·22
Flooring with 8-inch square bricks.						
Rooms	...	40 0	...	30 0	1,200	
Verandah	...	33 9	...	8 0	270	
Door pieces	2	4 0	...	1 6	12	
					1,482	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	1,473	
Squares ...	...	...	...	...	...	14·73
Plastering with two coats.						
Interior	...	...	...	...	...	
Rooms	2	100 0	...	14 0	2,800	
Exterior	...	...	...	...	...	
Basement all round	...	173 3	...	2 4½	411	
Superstructure	...	155 0	...	14 0	2,170	
Parapet	...	151 0	...	5 0	755	
Binding wall	...	31 0	...	3 0	93	
Door jambs	2	20 0	...	1 6	60	
Window do.	6	17 0	...	1 6	153	
Do. do.	7	13 6	...	1 6	142	
Ventilator do.	7	8 0	...	1 6	84	
						6,668
Deductions—						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	13	3 6	...	5 0	455	
Ventilators ... ... 2 ×	7	3 6	...	2 3	110	
						693
Square feet ...	...	...	...	...	...	5,975
Squares...	...	...	...	...	...	59·75
Plaster cornice at ends of terrace...L. feet.	...	...	...	...	166	
Wooden railing for Clerk's room...L. feet.	...	...	...	...	20	

Detailed Quantities.—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting doors, windows and exposed woodwork with three coats of Carson's oak paint.						
Venetian and panel doors	3	64 0	...	...	192	
Do. windows	3	105 0	...	...	315	
Glazed windows with iron bars ...	2	123 0	...	...	246	
Do. ventilators	1	55 0	...	...	55	
Waling pieces	...	164 6	...	1 2	192	
Verandah posts...	4	2 0	..	7 4½	59	
Do. brackets.	6	1 0	...	1 0	6	
Eave Board	0	33 0	...	1 0	33	
Square feet ...	...	...	...	...	1,098	
Squares ...	...	...	...	...	...	10·98
Wood-oiling, three coats.						
Railing	2	20 0	...	3 0	120	
Beams	4	23 0	...	3 8	337	
Joists	56	12 3	...	1 3	1,234	
Do.	28	10 9	...	1 3		
Do.	42	2 7½	...	1 2	145	
Do.	4	3 6	...	1 2		
Breastsummers	3	11 0	...	2 0	66	
Rafters	23	9 9	...	0 11	206	
Wall-plate	...	33 0	...	1 1½	37	
Square feet ...	...	...	...	...	2,145	
Squares ...	...	...	...	...	21·45	

ABSTRACT.

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
4,213 C. feet ...	Excavation for foundations	...	1,000 C. feet.	...
2,363 „ ...	Earth-filling in basement	...		...
756 „ ...	Concrete	...	100 C. feet.	...
1,633 „ ...	Brickwork in foundations	...		...
862 „ ...	Do. in basement	...	„	...
3,460 „ ...	Do. in superstructure	...	„	...
59 „ ...	Archwork	...	„	...
42 „ ...	Cut-stone work	...	„	...
303 „ ...	Teakwood wrought and put up ...	...	Cubic foot.	...
20 lb. ...	Wrought-iron work	...	„	...
64 S. feet ...	Venetian and panel doors with frames.	...	lb.	...
105 „ ...	Venetian windows with frames ...	...	Square foot.	...
123 „ ...	Glazed windows with frames and iron bars for Record-room	...	„	...
55 „ ...	Glazed ventilators	...	„	...
17·10 Squares.	Terrace roofing	...	„	...
3·22 „ ...	Slope terrace	...	Square.	...
14·73 „ ...	Flooring with 8-inch square bricks ...	...	„	...
59·75 „ ...	Plastering with two coats	...	„	...
166 Lin feet.	Plaster cornice, exterior	...	„	...
20 „ ...	Wooden railing	...	L. foot.	...
		...	„	...

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	6	3 6	...	5 0	105	Do.
Windows with glazed shutters and frames and $\frac{3}{4}$" square iron bars for Record-room.	7	3 6	...	5 0	123	Do.
Glazed ventilators	7	3 6	...	2 3	55	Do.
Terrace roofing	...	36 0	...	47 6	1,710	Do.
Squares ...	...	...	...	...	...	17·10
						Sq. feet.
Slope terrace for verandah	...	33 0	...	9 9	322	
Squares ...	...	...	...	...	...	3·22
Flooring with 8-inch square bricks.						
Rooms	...	40 0	...	30 0	1,200	
Verandah	...	33 9	...	8 0	270	
Door pieces	2	4 0	...	1 6	12	
					1,482	
Deduct stones under posts	4	1 6	...	1 6	9	
				...	1,473	
Square feet ...	...	...	...	...	...	14·73
Squares ...	...	...	...	...	...	
Plastering with two coats.						
Interior	...	...	...	...	...	
Rooms	2	100 0	...	14 0	2,800	
Exterior	...	...	...	...	...	
Basement all round	...	173 3	...	2 4½	411	
Superstructure	...	155 0	...	14 0	2,170	
Parapet	...	151 0	...	5 0	755	
Binding wall	...	31 0	...	3 0	93	
Door jambs	2	20 0	...	1 6	60	
Window do.	6	17 0	...	1 6	153	
Do. do.	7	13 6	...	1 6	142	
Ventilator do. ...	7	8 0	...	1 6	84	
						6,668
Deductions—						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	13	3 6	...	5 0	455	
Ventilators ... 2 ×	7	3 6	...	2 3	110	
						693
						5,975
Square feet ...	...	...	...	...	...	59·75
Squares...	...	...	...	...	...	
Plaster cornice at ends of terrace...L. feet.	...	...	...	...	166	
Wooden railing for Clerk's room...L. feet.	...	...	...	...	20	

Detailed Quantities.—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting doors, windows and exposed woodwork with three coats of Carson's oak paint.						
Venetian and panel doors	3	64 0	...	...	192	
Do. windows	3	105 0	...	...	315	
Glazed windows with iron bars ...	2	123 0	...	...	246	
Do. ventilators	1	55 0	...	...	55	
Waling pieces	...	164 6	...	1 2	192	
Verandah posts...	4	2 0	...	7 4½	59	
Do. brackets.	6	1 0	...	1 0	6	
Eave Board	0	33 0	...	1 0	33	
Square feet ...	...	...	...	...	1,098	
Squares ...	...	...	...	...	...	10·98
Wood-oiling, three coats.						
Railing	2	20 0	...	3 0	120	
Beams	4	23 0	...	3 8	337	
Joists	56	12 3	...	1 3		
Do.	28	10 9	...	1 3	1,234	
Do.	42	2 7½	...	1 2		
Do.	4	3 6	...	1 2	145	
Breastsummers	3	11 0	...	2 0	66	
Rafters	23	9 9	...	0 11	206	
Wall-plate	...	33 0	...	1 1½	37	
Square feet ...	...	...	...	...	2,145	
Squares ...	...	...	...	...	21·45	

ABSTRACT.

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
4,213 C. feet ...	Excavation for foundations	...	1,000 C. feet.	...
2,363 „ ...	Earth-filling in basement	...	...	...
756 „ ...	Concrete	...	100 C. „ feet.	...
1,633 „ ...	Brickwork in foundations	...	...	...
862 „ ...	Do. in basement	...	„	...
3,460 „ ...	Do. in superstructure	...	„	...
59 „ ...	Archwork	...	„	...
42 „ ...	Cut-stone work	...	„	...
303 „ ...	Teakwood wrought and put up ...	...	Cubic foot.	...
20 lb. ...	Wrought-iron work	...	„	...
64 S. feet ...	Venetian and panel doors with frames.	...	lb.	...
105 „ ...	Venetian windows with frames ...	...	Square foot.	...
123 „ ...	Glazed windows with frames and iron bars for Record-room	...	„	...
55 „ ...	Glazed ventilators	...	„	...
17·10 Squares.	Terrace roofing	...	„	...
3·22 „ ...	Slope terrace	...	Square.	...
14·73 „ ...	Flooring with 8-inch square bricks ...	...	„	...
59·75 „ ...	Plastering with two coats	...	„	...
166 Lin feet.	Plaster cornice, exterior	...	„	...
20 „ ...	Wooden railing	...	L. foot.	...
		...	„	...

ABSTRACT—*cont.*

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
10·98 Squares.	Painting doors, windows, and exposed woodwork with three coats of Carson's oak paint	...	Square.	
21·45 „ ...	Wood-oiling roof timbers, &c., with 3 coats	...	„	...
	Contingencies at 5 per cent	...	...	...
	Total ...	...	...	...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

8%/9

DEPARTMENT PUBLIC WORKS.

REGISTRAR'S AND SUB-REGISTRAR'S OFFICES WITH TERRACE ROOFING.

Specification of works to be performed in executing the Standard Designs for Registrar's and Sub-Registrar's Offices according to Drawings, Sheets Nos. 19 *and* 21, *signed by the Officiating Consulting Architect on* 16*th September* 1881.

EXCAVATOR.

Clearing site.—Take down any existing building on the site, stacking such materials as it may be desirable to use again.

Excavation.—After the centre lines have been pegged and lined, set out on either side of the lines half the total breadth of the foundations, and excavate to the depth or depths shown on the drawing, or to such depth as the officer in charge of the works may direct.

Slips and Baling.—If slips occur during the progress of the works, clear the material away and bale any water lodging in the trenches from a hole or holes made without the limits of the same.

Ramming.—After the officer in charge of the work has seen that the trenches are the full and proper widths and depths well ram the bottom with heavy beaters for the after reception of the concrete.

BRICKLAYER.

Concrete.—Lay over the full breadth of the trenches about nine inches of concrete as hereinafter specified and well ram with heavy beaters to a thickness of about six inches. After the first layer has consolidated, lay a second and execute as before. The complete concrete should be about twelve inches thick.

Brickwork.—Mark off carefully the centre lines and lay off the thickness of the footing course according to the plan.

The brickwork will be executed in sound material, and care will be taken to insert during the progress of the work the door and window frames, wood-bricks for railing, &c.

The walls will be two bricks thick, about eighteen inches.

Splays.—The openings will be splayed as shown on the plan.

Arching.—The heads of the openings will be covered by segmental arches built in concentric rings clear of the frame. The space between the arch and the top of the frame will be carefully closed in after the brickwork has settled down.

Bond.—The bond should be English if possible.

Stones.—Set the stones under the verandah posts, also those under the beams and fasten properly. All wood supplied by the carpenter.

STONE MASON.


Provide and dress two lines No. 4 stones 1′ 6″ × 1′ 6″ × 6″ with mortice holes 2″ square and 2″ deep to receive the verandah posts.

Steps.—Provide and dress two lines, the steps shown on the drawing, tailing each stone not less than three inches.


CARPENTER.

NOTE.—*Vary this clause to suit Registrar's and Sub-Registrar's Offices.*—Supply beams——— × ——— × ——— supply joists ——— × ——— × ——— supply doors, windows and ventilators as shown on the drawing neatly rebated and morticed in a workmanlike manner.

Halve the joists into the beam to the extent of half an inch. The longitudinal joists will project over the wall to the extent of about 13 inches including the waling piece.

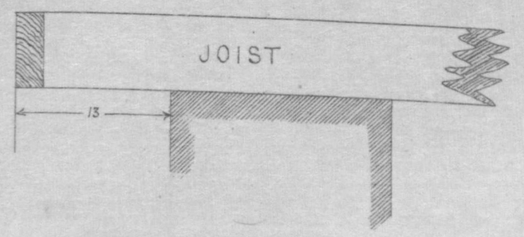

small cantilevers will be arranged along the longitudinal walls halved under the joists nearest the wall thus—

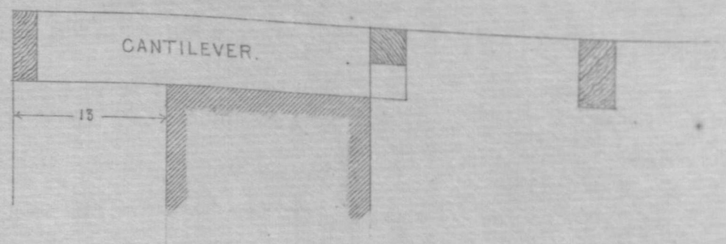

Support all joists and beams during the execution of the terrace and slightly ease the wedges as the work progresses, allow the supports to remain for three weeks after the completion of the terrace.

TERRACE.

Lay over ordinary terrace brick in mortar and finish off in the particular method employed in the district, taking care to make proper slopes for drainage.

FLOORING.

After the surface has been brought up to the proper level lay an even floor of 8-inch square tiles, set diagonally. The tiles will be rubbed on the surface and gauged to fit each other.

PLASTERER.

Plaster the whole of the interior and exterior with two coats of plaster (see Specification Standard Designs for Police Stations, dated 15th January 1881).

MATERIALS.

The bricks will be cast in a mould ——— inches × ——— inches × ——— inches well burnt and free from defects.

The timber will be well seasoned and free from defects.

The lime will be collected at ——— properly burnt and slaked.

The sand will be collected at ———.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

856/10

ESTIMATE of the Cost of constructing a Sub-Registrar's Office with tiled roofing according to Standard Design, Sheet No. 22, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls	...	99 0	4 6	4 6	2,005	
Partition	...	21 0	3 8	4 6	347	
Verandah walls	...	35 9	3 6	4 6	563	
Steps	...	13 0	3 0	1 0	39	
Cubic feet	...	...	...	...	2,954	
Earth-filling in Basement.						
Rooms	...	24 0	21 0	1 6	756	
Platform	...	12 0	8 6	1 0	102	
Verandah	...	25 9	5 1½	1 6	198	
Cubic feet	...	...	...	...	1,056	
Concrete.						
Outer walls	...	99 0	3 6	1 0	347	
Partitions	...	22 0	2 8	1 0	59	
Verandah walls	...	36 9	2 6	1 0	92	
Steps	...	13 0	3 0	1 0	39	
Cubic feet	...	...	...	...	537	
Brickwork in Foundations.						
Footing course—						
Outer walls	...	99 0	2 8	1 6	396	
Partition	...	22 10	1 10	1 6	63	
Verandah wall	...	37 7	1 6	1 6	85	
Above footing to ground level—						
Outer walls	...	99 0	2 3	2 0	445	
Partition	...	23 3	1 6	2 0	70	
Verandah wall	...	38 0	1 0	2 0	76	
Cubic feet	...	...	...	...	1,135	
Brickwork in Basement.						
Outer walls	...	99 0	2 3	2 0	446	
Partition	...	23 3	1 6	2 0	70	
Verandah wall	...	38 0	1 0	2 0	76	
Steps	...	13 0	3 0	0 6	20	
Do.	...	11 0	2 0	0 6	11	
Do.	...	9 0	1 0	0 6	5	
					628	
Deduct stone in steps and under posts as per details	...	...	...	...	29	
Cubic feet	...	...	...	...	599	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure.						
Outer walls		99 0	1 6	12 0	2,214	
Partition		24 0	1 6	12 0		
Gables	3	27 0	1 6	4 6	547	
Over gable ends	2	33 0	1 6	0 9	74	
Corbels	12	1 0	0 6	1 6	9	
Band over verandah roof	1	27 0	0 3	0 9	5	
						2,849
Deductions.						
Doorways	2	4 0	1 6	8 0	96	
Windows	8	3 6	1 6	5 0	210	
Gable ventilators	8	1 3	1 3	1 6	19	
Archwork as per details	...	...	...	...	94	
						419
Cubic feet ...	...	...	...	...	...	2,430
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0	94	C. feet.
Do. windows	6	4 9	1 6	1 0		
Semi-circle arch for gable ventilator	2	11 9	1 6	1 0		
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps	...	39 0	1 3	0 6	24	
Slabs under beams	3	2 0	3 0	0 4	6	
Do.	6	2 0	2 0	0 4	8	
Cubic feet ...	...	...	...	...	43	
Teakwood.						
Clerks' room purlins and ridge	3	14 0	0 5	0 9	23	
Record-room do.	3	11 0	0 5	0 9		
Wall-plates	2	25 6	0 3	0 3	3	
Rafters	36	19 0	0 3	0 4	57	
Struts	36	2 6	0 3	0 3	6	
Uprights (double)	72	3 2	0 3½	0 1½	8	
Eaves board	2	27 0	0 ¾	0 5	1	
Verandah posts	4	6 6	0 5	0 5	4	
Do. breastsummers	3	9 1½	0 5	0 7½	7	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	19	9 1½	0 3	0 4	14	
Do. wall-plates	1	27 0	0 3	0 5	3	
Do. eave board	1	27 0	0 ¾	0 5	1	
Cubic feet ...	...	...	...	...	129	
Wrought-iron work.						
¾″ diameter bolts to secure verandah wall-plate	6	1 9 = 10 6 ×		1·47 =	15·43	
¾″ hex. nuts and bolt heads. ...	6	...	... ×	·43 =	2·58	
3″ × 3″ × ⅛″ washers for do. ...	6	...	... ×	·31 =	1·86	
lb. ...	...	...	...	...	19·87	
Say lb. ...	...	...	...	...	...	20

8576/11

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	4	3 6	...	5 0	70	Do.
Glazed windows with frames and ¾″ square iron bars for Record-room ...	4	3 6	...	5 0	70	Do.
Glazed ventilators in gables	8	1 3	...	1 3	12½	Do.
Tiled roofing.						
Over rooms	...	26 9	...	39 0	1,043	
Do. verandah	...	27 0	...	9 1½	246	
Square feet ...	...	...	...	...	1,289	
Squares ...	...	...	...	...	...	12·89
Flooring with 8-inch square bricks.						
Clerks' and Registrar's rooms	...	24 0	...	12 0	288	
Record-room	...	24 0	...	9 0	216	
Verandah	...	27 9	...	6 6	180	
Door pieces	2	4 0	...	1 6	12	
					696	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	687	
Squares ...	...	...	...	...	...	6·87
Plastering with two coats.						
Interior—						
Clerks' and Registrar's room		72 0	...	12 0	864	
Record-room		66 0	...	12 0	792	
Gables	4	24 0	...	4 6	432	
Exterior—						
Basement all round		120 3	...	2 4½	286	
Superstructure		105 0	...	12 0	1,260	
Gables	2	27 0	...	5 2	279	
Wall over do.	2	33 0	...	3 0	198	
Door jambs	2	20 0	...	1 6	60	
Window do.	4	17 0	...	1 6	102	
Do. do.	4	13 6	...	1 6	81	
						4,354
Deductions.						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	8	3 6	...	5 0	280	
						408
Square feet ...	...	...	...	...	...	3,946
Squares ...	...	...	...	...	...	39·46
Wooden Railing.						
For Clerks' room ... Lineal feet.	...	...	...	...	12	...

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure.						
Outer walls		99 0	1 6	12 0	2,214	
Partition		24 0	1 6	12 0		
Gables	3	27 0	1 6	4 6	547	
Over gable ends	2	33 0	1 6	0 9	74	
Corbels	12	1 0	0 6	1 6	9	
Band over verandah roof	1	27 0	0 3	0 9	5	
						2,849
Deductions.						
Doorways	2	4 0	1 6	8 0	96	
Windows	8	3 6	1 6	5 0	210	
Gable ventilators	8	1 3	1 3	1 6	19	
Archwork as per details	...	...	...	...	94	
						419
Cubic feet ...	...	...	...	...	...	2,430
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0	94	C. feet.
Do. windows	6	4 9	1 6	1 0		
Semi-circle arch for gable ventilator	2	11 9	1 6	1 0		
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps	...	39 0	1 3	0 6	24	
Slabs under beams	3	2 0	3 0	0 4	6	
Do.	6	2 0	2 0	0 4	8	
Cubic feet ...	...	...	...	...	43	
Teakwood.						
Clerks' room purlins and ridge ...	3	14 0	0 5	0 9	23	
Record-room do.	3	11 0	0 5	0 9		
Wall-plates	2	25 6	0 3	0 3	3	
Rafters	36	19 0	0 3	0 4	57	
Struts	36	2 6	0 3	0 3	6	
Uprights (double)	72	3 2	0 3½	0 1½	8	
Eaves board	2	27 0	0 ¾	0 5	1	
Verandah posts	4	6 6	0 5	0 5	4	
Do. breastsummers	3	9 1½	0 5	0 7½	7	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	19	9 1½	0 3	0 4	14	
Do. wall-plates	1	27 0	0 3	0 5	3	
Do. eave board	1	27 0	0 ¾	0 5	1	
Cubic feet ...	...	...	...	...	129	
Wrought-iron work.						
¾" diameter bolts to secure verandah wall-plate	6	1 9 = 10 6 ×		1·47 =	15·43	
¾" hex. nuts and bolt heads. ...	6	...	... ×	·43 =	2·58	
3" × 3" × ⅛" washers for do. ...	6	...	... ×	·31 =	1·86	
lb. ...	...	...	...	...	19·87	
Say lb. ...	...	...	...	...	...	

856/11

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	4	3 6	...	5 0	70	Do.
Glazed windows with frames and ¾" square iron bars for Record-room ...	4	3 6	...	5 0	70	Do.
Glazed ventilators in gables	8	1 3	...	1 3	12½	Do.
Tiled roofing.						
Over rooms	...	26 9	...	39 0	1,043	
Do. verandah	...	27 0	...	9 1½	246	
Square feet ...	...	...	...	...	1,289	
Squares ...	...	...	...	...	...	12·89
Flooring with 8-inch square bricks.						
Clerks' and Registrar's rooms	...	24 0	...	12 0	288	
Record-room	...	24 0	...	9 0	216	
Verandah	...	27 9	...	6 6	180	
Door pieces	2	4 0	...	1 6	12	
					696	
Deduct stones under posts	4	1 6	...	1 6	9	
Square feet ...	...	...	...	...	687	
Squares ...	...	...	...	...	...	6·87
Plastering with two coats.						
Interior—						
Clerks' and Registrar's room ...	...	72 0	...	12 0	864	
Record-room	...	66 0	...	12 0	792	
Gables	4	24 0	...	4 6	432	
Exterior—						
Basement all round	...	120 3	...	2 4½	286	
Superstructure	...	105 0	...	12 0	1,260	
Gables	2	27 0	...	5 2	279	
Wall over do.	2	33 0	...	3 0	198	
Door jambs	2	20 0	...	1 6	60	
Window do.	4	17 0	...	1 6	102	
Do. do.	4	13 6	...	1 6	81	
						4,354
Deductions.						
Doorways ... ... 2 ×	2	4 0	...	8 0	128	
Windows ... ... 2 ×	8	3 6	...	5 0	280	
						408
Square feet ...	...	...	...	...	...	3,946
Squares ...	...	...	...	...	...	39·46
Wooden Railing.						
For Clerks' room ... Lineal feet.	...	...	...	...	12	...

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting doors, windows and exposed woodwork with three coats of Carson's paint.						
Venetian and panel doors	3	64 0	...	...	192	
Do. windows	3	70 0	...	...	210	
Glazed windows with iron bars ...	2	70 0	...	...	140	
Glazed ventilators	...	...	...	...	13	
Struts	36	2 6	...	1 0	90	
Uprights	72	3 0	...	0 8½	153	
Eaves boards	2	27 0	...	0 9	41	
Verandah posts...	4	6 6	...	1 8	43	
Do. brackets	6	1 0	...	1 0	6	
Do. eave board	...	27 0	...	0 9	20	
Square feet ...	...	...	...	...	908	
Squares ...	...	...	...	...	...	9·08
Wood-oiling, three coats.						
Railing	2	12 0	...	3 0	72	
Purlings and ridge	3	14 0	...	1 11	144	
Do.	3	11 0	...	1 11		
Rafters	36	19 0	...	0 11	627	
Breastsummers	...	27 0	...	1 8	45	
Rafters	19	9 1½	...	0 11	159	
Wall-plate	...	27 0	...	0 8	18	
Square feet ...	...	...	...	...	1,065	
Squares ...	...	...	...	...	...	10·65

ABSTRACT.

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
2,954 C. feet.	Excavation for foundations ...	...	1,000 C. feet.	...
1,056 „	Earth-filling in basement... ...	...	„	...
537 „	Concrete	...	100 C. feet.	...
1,135 „	Brickwork in foundations ...	...	„	...
599 „	Do. in basement	...	„	...
2,430 „	Do. in superstructure ...	...	„	...
94 „	Archwork	...	„	...
43 „	Cut-stone work	...	C. foot.	...
129 „	Teakwood wrought and put up ...	...	„	...
20 lb.	Wrought-iron work	...	lb.	...
64 Sq. feet.	Venetian and panel doors with frames	...	Sq. foot.	...
70 „	Venetian windows with frames ...	...	„	...
70 „	Glazed windows with frames and iron bars for record-room ...	...	„	...
12½ „	Glazed ventilators in gables ...	...	„	...
12·89 Squares.	Tiled roofing with flat and pan tiles including teak reepers ...	...	Square.	...

ABSTRACT—*cont.*

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
6·87 Squares.	Flooring with 8-inch square bricks.	...	Square.	...
39·46 „	Plastering with two coats	...	„	...
12 L. feet.	Wooden railing	...	L. foot.	...
9·08 Squares.	Painting doors, windows and exposed wood-work with three coats of Carson's oak paint.	...	Square.	...
10·65 „	Wood-oiling roof-timbers, &c., three coats.	...	„	...
	Contingencies at 5 per cent. ...	...	...	...
	Total ...	...	...	...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

8576/12

ESTIMATE of the Cost of constructing a Registrar's Office with tiled roofing according to Standard Sheet No. 20, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls		149 0	4 6	4 6	3,017	
Partition		27 0	3 8	4 6	446	
Verandah walls		44 9	3 6	4 6	705	
Steps		15 0	3 0	1 0	45	
Cubic feet					4,213	
Earth-filling in Basement.						
Rooms		30 0	40 0	1 6	1,800	
Platform		11 6	20 0	1 0	230	
Verandah		31 9	7 0	1 6	333	
Cubic feet					2,363	
Concrete.						
Outer walls		149 0	3 6	1 0	522	
Partition		28 0	2 8	1 0	75	
Verandah walls		45 9	2 6	1 0	114	
Steps		15 0	3 0	1 0	45	
Cubic feet					756	
Brickwork in Foundations.						
Footing course—						
Outer walls		149 0	2 8	1 6	596	
Partition		28 10	1 10	1 6	79	
Verandah walls		46 7	1 6	1 6	105	
Above footing to ground level—						
Outer wall		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah wall		47 0	1 0	2 0	94	
Cubic feet					1,633	
Brickwork in Basement.						
Outer walls		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah walls		47 0	1 0	2 0	94	
Steps		15 0	3 0	0 6	23	
Do.		13 0	2 0	0 6	13	
Do.		11 0	1 0	0 6	6	
					895	
Deduct stone in steps and under posts as per details					33	
Cubic feet					862	
Brickwork in Superstructure.						
Outer walls		149 0	1 6	14 0	3,759	
Partition		30 0	1 6	14 0		

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure—cont.						
Gables	3	33 0	1 6	5 3	780	
Over gable end	2	40 0	1 6	0 9	90	
Corbels	12	1 0	0 6	1 6	9	
Band over verandah roof		33 0	0 3	0 9	6	
						4,644
Deductions—						
Doors	2	4 0	1 6	8 0	96	
Windows	12	3 6	1 6	5 0	315	
Ventilators	4	3 6	1 6	2 3	47	
Archwork as per details					108	
						566
Cubic feet						4,078
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0	16	
Do. do. windows	8	4 9	1 6	1 0	57	
Semicircular arches for gable ventilators.	2	11 9	1 6	1 0	35	
Cubic feet					108	
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps		45 0	1 3	0 6	28	
Slabs under beams	3	3 0	2 0	0 4	14	
Do.	6	2 0	2 0	0 4		
Cubic feet					47	
Teakwood.						
Purlins and ridge	6	22 3	0 9	1 2	117	
Wall plates	2	44 6	0 3	0 3	6	
Rafters	60	22 6	0 3	0 5	141	
Struts	60	2 6	0 3	0 3	9	
Uprights, double	120	3 2	0 1½	0 3½	14	
Eaves board	2	45 9	0 ¾	0 6	3	
Verandah posts	4	0 6	0 6	7 4½	7	
Do. breastsummers	3	11 0	0 6	0 9	12	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	23	10 9	0 3	0 5	26	
Do. wall-plate	1	33 0	0 3½	0 5	4	
Do. eave board	1	33 0	0 ¾	0 6	1	
Cubic feet					342	
Wrought iron work.						
¾″ diameter bolts to secure verandah wall-plate.	6	1 9	=10 6	× 1·47	=15·43	
¾″ hex. nuts and heads	6			× ·43	= 2·58	
3″ × 3″ × ⅛″ washers for heads	6			× ·31	= 1·86	
lb.					19·87	
Say lb.						

ESTIMATE of the Cost of constructing a Registrar's Office with tiled roofing according to Standard Sheet No. 20, signed by the Officiating Consulting Architect to Government on 16th September 1881.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Excavation for Foundations.						
Outer walls		149 0	4 6	4 6	3,017	
Partition		27 0	3 8	4 6	446	
Verandah walls		44 9	3 6	4 6	705	
Steps		15 0	3 0	1 0	45	
Cubic feet					4,213	
Earth-filling in Basement.						
Rooms		30 0	40 0	1 6	1,800	
Platform		11 6	20 0	1 0	230	
Verandah		31 9	7 0	1 6	333	
Cubic feet					2,363	
Concrete.						
Outer walls		149 0	3 6	1 0	522	
Partition		28 0	2 8	1 0	75	
Verandah walls		45 9	2 6	1 0	114	
Steps		15 0	3 0	1 0	45	
Cubic feet					756	
Brickwork in Foundations.						
Footing course—						
Outer walls		149 0	2 8	1 6	596	
Partition		28 10	1 10	1 6	79	
Verandah walls		46 7	1 6	1 6	105	
Above footing to ground level—						
Outer wall		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah wall		47 0	1 0	2 0	94	
Cubic feet					1,633	
Brickwork in Basement.						
Outer walls		149 0	2 3	2 0	671	
Partition		29 3	1 6	2 0	88	
Verandah walls		47 0	1 0	2 0	94	
Steps		15 0	3 0	0 6	23	
Do.		13 0	2 0	0 6	13	
Do.		11 0	1 0	0 6	6	
					895	
Deduct stone in steps and under posts as per details					33	
Cubic feet					862	
Brickwork in Superstructure.						
Outer walls		149 0	1 6	14 0	} 3,759	
Partition		30 0	1 6	14 0		

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Brickwork in Superstructure—cont.						
Gables	3	33 0	1 6	5 3	780	
Over gable end	2	40 0	1 6	0 9	90	
Corbels	12	1 0	0 6	1 6	9	
Band over verandah roof		33 0	0 3	0 9	6	
Deductions—						4,644
Doors	2	4 0	1 6	8 0	96	
Windows	12	3 6	1 6	5 0	315	
Ventilators	4	3 6	1 6	2 3	47	
Archwork as per details					108	
						566
Cubic feet						4,078
Archwork.						
Segmental arches over doors	2	5 3	1 6	1 0	16	
Do. do. windows	8	4 9	1 6	1 0	57	
Semicircular arches for gable ventilators.	2	11 9	1 6	1 0	35	
Cubic feet					108	
Cut-stone work.						
Under posts	4	1 6	1 6	0 6	5	
Steps		45 0	1 3	0 6	28	
Slabs under beams	3	3 0	2 0	0 4		
Do.	6	2 0	2 0	0 4	} 14	
Cubic feet					47	
Teakwood.						
Purlins and ridge	6	22 3	0 9	1 2	117	
Wall plates	2	44 6	0 3	0 3	6	
Rafters	60	22 6	0 3	0 5	141	
Struts	60	2 6	0 3	0 3	9	
Uprights, double	120	3 2	0 1½	0 3½	14	
Eaves board	2	45 9	0 2¾	0 6	3	
Verandah posts	4	0 6	0 6	7 4½	7	
Do. breastsummers	3	11 0	0 6	0 9	12	
Do. brackets	6	1 1	0 3	1 1	2	
Do. rafters	23	10 9	0 3	0 5	26	
Do. wall-plate	1	33 0	0 3½	0 5	4	
Do. eave board	1	33 0	0 2¾	0 6	1	
Cubic feet					342	
Wrought iron work.						
¾″ diameter bolts to secure verandah wall-plate.	6	1 9	=10 6	× 1·47	=15·43	
¾″ hex. nuts and heads	6			× ·43	= 2·58	
3″ × 3″ × ⅛″ washers for heads	6			× ·31	= 1·86	
lb.					19·87	
Say lb.						

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	6	3 6	...	5 0	105	Sq. feet.
Windows with glazed shutters and frames and ½" square iron bars.						
For record-room	6	3 6	...	5 0	105	Sq. feet.
Glazed ventilators with frames.						
At sides	4	3 6	...	2 3	31½	
At gables	8	1 3	...	1 3	12½	
Square feet ...	...	...	...	...	44	
Tiled roofing.						
Over rooms	...	45 9	...	46 0	2,105	
Over verandah	...	33 0	...	10 9	355	
Square feet ..	...	...	...	...	2,460	
Squares ...	...	...	...	...	...	24·60
Flooring with 8-inch square bricks over a levelling course of wall bricks.						
Rooms	...	40 0	...	30 0	1,200	
Verandah	...	33 9	...	8 0	270	
Door pieces	2	4 0	...	1 6	12	
					1,482	
	4	1 6	...	1 6	1,473	
Deduct stones under posts			...	...	...	14·73
Square feet ...	...	...	...	...	...	
Squares ...	...	...	...		14 0	2,800
					5 3	630
Plastering with two coats.						
	2	100 0	...			411
Interior—	4	30 0	...		2 4½	2,170
Rooms		173 3	...		14 0	363
Gables		155 0	...		5 6	240
Exterior—		38 0	...		3 0	60
Basement all round	2	40 0	...		1 6	204
Superstructure	2	20 0	...		1 6	81
Gables	2	17 0	...		1 6	48
Wall over do.	8	13 6	...		1 6	
Door jambs	4	8 0	...			128
Window do.	4				8 0	462
Do.		4 0	...		5 6	63
Ventilator do ...	2	3 6	...		2 3	
Deductions—						
Doorways ... ... 2 ×	12	3 6	...			653
Windows ... ... 2 ×	4					6,354
Ventilators						63·54
Square feet ...	...	...	...	...	...	
Squares ...	...	...	...	...	...	

856/13

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Wooden railing.						
For Clerks' room ... ... Lineal feet	...	...	...	...	20	
Painting doors, windows and exposed woodwork with three coats of Carson's oak paint.						
Venetian doors	3	64 0				
Do. windows	3	105 0	...	...	192	
Glazed windows with iron bars ...	2	105 0	...	...	315	
Do. ventilators	...	...	...	...	210	
Struts	60	2 6	...	...	44	
Uprights	120	3 2	...	1 0	150	
Eaves board	2	45 9	...	0 8½	259	
Verandah posts	4	2 0	...	0 10½	80	
Brackets	6	1 0	...	7 4½	59	
Eave board	1	33 0	...	1 0	6	
			...	0 10½	29	
Square feet ...	...	...	...	...	1,354	
Squares ...	...	...	...	...	...	13·54
Wood-oiling, three coats.						
Railing	2	20 0				
Purlins and ridge	6	22 3	...	3 0	120	
Rafters	60	22 6	...	3 1	412	
Breastsummers	3	11 0	...	1 1	1,463	
Rafters	23	10 9	...	2 0	66	
Wall-plate	1	33 0	...	1 1	268	
			...	1 1½	37	
Square feet ...	...	...	...	...	2,366	
Squares ...	...	...	...	...	...	23·66

ABSTRACT.

Quantity.		Item.	Rate.	Per	Amount.
			RS. A. P.		RS. A. P.
4,213	C. feet	Excavation for foundation	...		...
2,363	,,	Earth-filling in basement	...	1,000 C. feet.	...
756	,,	Concrete	...	,,	...
1,633	,,	Brickwork in foundations	...	100 ,,	...
862	,,	Do. in basement	...	,,	...
4,078	,,	Do. in superstructure	...	,,	...
108	,,	Archwork	...	,,	...
47	,,	Cut-stone work	...	,,	...
342	,,	Teakwood wrought and put up	...	C. foot.	...
20	lbs.	Wrought-ion work	...	,,	...
64	S. feet.	Venetian and panel doors with frames.	...	lb.	...
105	,,	Venetian windows with frames ...	...	Square foot.	...
105	,,	Glazed windows with frames and iron bars for record room	...	,,	...
44	,,	Glazed ventilators	...	,,	...
			...	,,	...

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	6	3 6	...	5 0	105	Sq. feet.
Windows with glazed shutters and frames and ¾" square iron bars.						
For record-room	6	3 6	...	5 0	105	Sq. feet.
Glazed ventilators with frames.						
At sides	4	3 6	...	2 3	31½	
At gables	8	1 3	...	1 3	12½	
Square feet ...	...	...	...	...	44	
Tiled roofing.						
Over rooms	...	45 9	...	46 0	2,105	
Over verandah	...	33 0	...	10 9	355	
Square feet ..	...	...	...	...	2,460	
Squares ...	...	...	...	...	...	24·60
Flooring with 8-inch square bricks over a levelling course of wall bricks.						
Rooms	...	40 0	...	30 0	1,200	
Verandah	...	33 9	...	8 0	270	
Door pieces	2	4 0	...	1 6	12	
					1,482	
Deduct stones under posts	4	1 6	...	1 6	9	
					1,473	
Square feet ...	...	...	...	...	...	14·73
Squares ...	...	...	...	...	...	
Plastering with two coats.						
Interior—						
Rooms	2	100 0	...	14 0	2,800	
Gables	4	30 0	...	5 3	630	
				2 4½	411	
Exterior—						
Basement all round	...	173 3	...	14 0	2,170	
Superstructure	...	155 0	...	5 6	363	
Gables	2	33 0	...	3 0	240	
Wall over do.	2	40 0	...	1 6	60	
Door jambs	2	20 0	...	1 6	204	
Window do.	8	17 0	...	1 6	81	
Do.	4	13 6	...	1 6	48	
Ventilator do	4	8 0	...			
Deductions—				8 0	128	
Doorways ... ... 2 ×	2	4 0	...	5 6	462	
Windows ... ... 2 ×	12	3 6	...	2 3	63	
Ventilators ... ... 2 ×	4	3 6	...			
						653
Square feet ...	...	...	...	...	...	6,354
Squares ...	...	...	...	...	...	63·54

856/13

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Wooden railing.						
For Clerks' room ... ... Lineal feet	...	...	...	...	20	
Painting doors, windows and exposed woodwork with three coats of Carson's oak paint.						
Venetian doors	3	64 0	...	...	192	
Do. windows	3	105 0	...	...	315	
Glazed windows with iron bars ...	2	105 0	...	...	210	
Do. ventilators	...	...	...	...	44	
Struts	60	2 6	...	1 0	150	
Uprights	120	3 2	...	0 8½	259	
Eaves board	2	45 9	...	0 10½	80	
Verandah posts	4	2 0	...	7 4½	59	
Brackets	6	1 0	...	1 0	6	
Eave board	1	33 0	...	0 10½	29	
Square feet ...	...	...	...	...	1,354	
Squares ...	...	...	...	...	...	13·54
Wood-oiling, three coats.						
Railing	2	20 0				
Purlins and ridge	6	22 3	...	3 0	120	
Rafters	60	22 6	...	3 1	412	
Breastsummers	3	11 0	...	1 1	1,463	
Rafters	23	10 9	...	2 0	66	
Wall-plate	1	33 0	...	1 1	268	
				1 1½	37	
Square feet ...	...	...	...	...	2,366	
Squares ...	...	...	...	...	...	23·66

ABSTRACT.

Quantity.		Item.	Rate.	Per	Amount.
			RS. A. P.		RS. A. P.
4,213	C. feet	Excavation for foundation	...		...
2,363	,,	Earth-filling in basement	...	1,000 C. feet.	...
756	,,	Concrete	...	,,	...
1,633	,,	Brickwork in foundations	...	100 ,,	...
862	,,	Do. in basement	...	,,	...
4,078	,,	Do. in superstructure	...	,,	...
108	,,	Archwork	...	,,	...
47	,,	Cut-stone work	...	,,	...
342	,,	Teakwood wrought and put up	...	,,	...
20	lbs.	Wrought-ion work	...	C. foot.	...
64	S. feet.	Venetian and panel doors with frames.	...	,,	...
105	,,	Venetian windows with frames ...	...	lb.	...
105	,,	Glazed windows with frames and iron bars for record room	...	Square foot.	...
44	,,	Glazed ventilators	...	,,	...
			...	,,	...
				,,	...

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and panel doors with frames ...	2	4 0	...	8 0	64	Sq. feet.
Venetian windows with frames	6	3 6	...	5 0	105	Sq. feet.
Windows with glazed shutters and frames and ¾" square iron bars.						
For record-room	6	3 6	...	5 0	105	Sq. feet.
Glazed ventilators with frames.						
At sides						
At gables	4	3 6	...	2 3	31½	
... ...	8	1 3	...	1 3	12½	
Square feet ...	...	...	...	...	44	
Tiled roofing.						
Over rooms	...	45 9	...	46 0	2,105	
Over verandah	...	33 0	...	10 9	355	
Square feet ..	...	...	...	...	2,460	
Squares ...	...	...	...	...	...	24·60
Flooring with 8-inch square bricks over a levelling course of wall bricks.						
Rooms	...	40 0	...	30 0	1,200	
Verandah	...	33 9	...	8 0	270	
Door pieces	2	4 0	...	1 6	12	
					1,482	
Deduct stones under posts	4	1 6	...	1 6	9	
					1,473	
Square feet ...	...	...	...	...	...	14·73
Squares ...	...	...	...	...	...	
Plastering with two coats.						
Interior—				14 0	2,800	
Rooms	2	100 0	...	5 3	630	
Gables	4	30 0	...	2 4½	411	
Exterior—				14 0	2,170	
Basement all round	...	173 3	...	5 6	363	
Superstructure	...	155 0	...	3 0	240	
Gables	2	33 0	...	1 6	60	
Wall over do.	2	40 0	...	1 6	204	
Door jambs	2	20 0	...	1 6	81	
Window do.	8	17 0	...	1 6	48	
Do.	4	13 6	...	8 0	128	
Ventilator do	4	8 0	...	5 6	462	
Deductions—				2 3	63	
Doorways ... ... 2 ×	2	4 0	...			
Windows ... ... 2 ×	12	3 6	...			
Ventilators ... ... 2 ×	4	3 6	...			653
						6,354
Square feet ...	...	...	...	...	...	63·54
Squares ...	...	...	...	...	...	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Wooden railing.						
For Clerks' room ... ... Lineal feet	...	...	...	...	20	
Painting doors, windows and exposed woodwork with three coats of Carson's oak paint.						
Venetian doors	3	64 0	...	...	192	
Do. windows	3	105 0	...	...	315	
Glazed windows with iron bars ...	2	105 0	...	...	210	
Do. ventilators	...	...	...	...	44	
Struts	60	2 6	...	1 0	150	
Uprights	120	3 2	...	0 8½	269	
Eaves board	2	45 9	...	0 10½	80	
Verandah posts	4	2 0	...	7 4½	59	
Brackets	6	1 0	...	1 0	6	
Eave board	1	33 0	...	0 10½	29	
Square feet ...	...	...	...	...	1,354	
Squares ...	...	...	...	...	...	13·54
Wood-oiling, three coats.						
Railing	2	20 0	...	3 0	120	
Purlins and ridge	6	22 3	...	3 1	412	
Rafters	60	22 6	...	1 1	1,463	
Breastsummers	3	11 0	...	2 0	66	
Rafters	23	10 9	...	1 1	268	
Wall-plate	1	33 0	...	1 1½	37	
Square feet ...	...	...	...	...	2,366	
Squares ...	...	...	...	...	...	23·66

ABSTRACT.

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
4,213 C. feet	Excavation for foundation	...	1,000 C. feet.	...
2,363 ,,	Earth-filling in basement	...	,,	...
756 ,,	Concrete	...	100 ,,	...
1,633 ,,	Brickwork in foundations	...	,,	...
862 ,,	Do. in basement	...	,,	...
4,078 ,,	Do. in superstructure	...	,,	...
108 ,,	Archwork	...	,,	...
47 ,,	Cut-stone work	...	C. foot.	...
342 ,,	Teakwood wrought and put up ...	...	,,	...
20 lbs.	Wrought-ion work	...	lb.	...
64 S. feet.	Venetian and panel doors with frames.	...	Square foot.	...
105 ,,	Venetian windows with frames ...	...	,,	...
105 ,,	Glazed windows with frames and iron bars for record room	...	,,	...
44 ,,	Glazed ventilators	...	,,	...

ABSTRACT.—*cont.*

Quantity.		Item.	Rate.	Per	Amount.
			RS. A. P.		RS. A. P.
24·60	Squares.	Tiled roofing with flat and pan tiles including teak reepers	...	Square.	..
14·73	„	Flooring with 8-inch square bricks ...	...	„	...
63·54	„	Plastering with two coats	...	„	...
20	L. feet.	Wooden railing	...	L. foot.	...
13·54	Squares.	Painting with three coats of Carson's paint	...	Square.	...
23·66	„	Wood-oiling roof timbers, three coats	...	„	...
...		Contingencies at 5 per cent.	...	...	...
		Total ...	...		...

MADRAS,
20th December 1881.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

DEPARTMENT PUBLIC WORKS.

856/14

REGISTRAR'S AND SUB-REGISTRAR'S OFFICES WITH TILED ROOFING.

Specification of works to be performed in executing the Standard Designs for Registrar's and Sub-Registrar's Offices, according to Drawing Sheets, Nos. 20 *and* 22, *signed by the Officiating Consulting Architect on the* 16*th September* 1881.

EXCAVATOR.

Clearing site—Take down any existing building on the site, stacking such materials as it may be desirable to use again.

Excavation.—After the centre lines have been pegged and lined, set out on either side of the lines half the total breadth of the foundations and excavate to the depth or depths shown on the drawing, or to such depth as the officer in charge of the works may direct.

Slips and Baling.—If slips occur during the progress of the works clear the material away and bale any water lodging in the trenches from a hole or holes made without the limits of the same.

Ramming.—After the officer in charge of the work has seen that the trenches are the full and proper widths and depths, well ram the bottom with heavy beaters for the after reception of the concrete.

BRICKLAYER.

Concrete.—Lay over the full breadth of the trenches about 9 inches of concrete as hereinafter specified and well ram with heavy beaters to a thickness of about 6 inches. After the first layer has consolidated lay a second and execute as before. The complete concrete should be about 12 inches thick.

Brickwork.—Mark off carefully the centre lines and lay off the thickness of the footing course according to the plan.

The brickwork will be executed in sound material, and care will be taken to insert during the progress of the work the door and window frames, wood-bricks for railing, &c.

The walls will be two bricks thick, about 18 inches.

Splays.—The openings will be splayed as shown on the plan.

Arching.—The heads of the openings will be covered by segmental arches built in concentric rings clear of the frame. The space between the arch and the top of the frame will be carefully closed in after the brickwork has settled down.

Bond.—The bond should be English if possible.

Stones.—Set the stones under the verandah posts, also those under the beams and fasten properly. All wood supplied by the carpenter.

STONE MASON.


Provide and dress two lines No. 4 stones 1′ 6″ × 1′ 6″ × 6″ with mortice holes 2″ square and 2″ deep to receive the verandah posts.

Steps.—Provide and dress two lines, the steps shown on the drawing, tailing each stone not less than three inches.

CARPENTER.

NOTE.—*Vary this clause to suit Registrar's and Sub-Registrar's Offices.*—Supply beams——— × ——— × ——— supply rafters ——— × ——— × ——— supply doors windows and ventilators as shown on the drawing, neatly rebated and morticed in a workmanlike manner.

The rafters will be notched over the beams and project 2 feet 6 inches from the face of the wall and strutted as shown on the drawing.

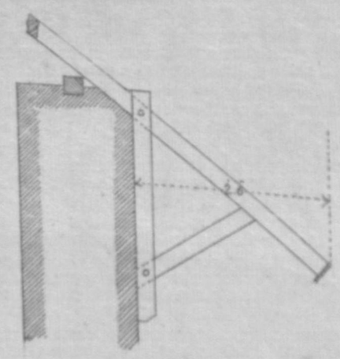

ROOFING.

Tiling.—Cover the roof with well burnt flat and pan tiles laid in the usual manner and the ridge with tiles specially made for the purpose.

Chunam bands.—Protect the ridge with chunam and lay bands on the tiling ——— inches broad and ——— inches apart rough cast on the surface.

FLOORING.

After the surface has been brought up to the proper level lay an even floor of 8-inch square tiles set diagonally. The tiles will be rubbed on the surface and gauged to fit each other.

PLASTERER.

Plaster the whole of the interior and exterior with two coats of plaster. (See Specification Standard Design for Police Stations, dated 15th January 1881.)

MATERIALS.

The bricks will be cast in a mould ——— inches × ——— inches × ——— inches, well burnt and free from defects.

The timber will be well seasoned and free from defects.

The lime will be collected at ——— properly burnt and slaked.

The sand will be collected at ———.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

836/15

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

14th January 1882, No. 120 W.

Buildings and Roads.
Civil Works.

Read the following papers :—

No. 69. From Major A. T. FRASER, R.E., Officiating Consulting Architect to Government, to the Chief Engineer, Public Works Department, dated Chepauk, 16th September 1881, No. 465.

I HAVE the honor, in terms of G.O., No. 1783 W., of the 21st July, to forward the following standard designs for Registrar's and Sub-Registrar's Offices prepared in accordance with the sketch plan herewith enclosed for reference, which was approved in the Judicial Department, dated 20th January 1881 :—

Standard design, Registrar's Office, terraced building.
Do. do. do. tiled building.
Do. Sub-Registrar's Office, terraced building.
Do. do. do. tiled building.

2. As it is understood Superintending Engineers are waiting for these standard plans, I have had to supply the Superintending Engineer, Second Circle, with copies in anticipation ; it is considered unadvisable to retain them till the quantities are taken out.

This will be done and a specification furnished when the plans are returned from the Lithographic Press.

SUBMITTED for the approval of Government in the Judicial Department, and for the countersignature of the Inspector-General of Registration.

19th September 1881. (Signed) J. PENNYCUICK, Major, R.E.,
Deputy Chief Engineer, P.W.D.

To the Judicial Department, with the letter above quoted
and five enclosures (requested to be returned).

No. 69-A. Proceedings of the Madras Government in the Judicial Department, dated 9th November 1881, No. 2283.

From the Public Works Department, dated 19th September 1881, No. 2150.

From the Inspector-General of Registration, Madras, dated 14th October 1881, No. 670.

THE plans are approved and returned with the countersignature of the Inspector-General of Registration.

(True Extract.)

(Signed) R. DAVIDSON,
Chief Secretary.

No. 69-B. From R. F. CHISHOLM, Esq., Consulting Architect to Government, to the Chief Engineer, Public Works Department, dated Chepauk, 20th December 1881, No. 736.

In continuation of this office letter, No. 465, dated 16th September, I have the honor to forward specifications and detailed quantities for the tiled and terraced standard designs for Registrar's and Sub-Registrar's Offices.

Two Specifications.
Four Detailed Estimates.

No. 70. Order thereon, 14th January 1882, No. 120 W.

The standard designs for Registrar's and Sub-Registrar's Offices, which have been approved in the Judicial Department, will be lithographed and the estimates and specifications printed for circulation and adoption in the department.

(True Extract.)

(Signed) R. H. SANKEY, Colonel, R.E.,
Secretary to Government, P.W.D.

To Superintending Engineers.
To the Consulting Architect to Government.
" Judicial Department.

Exd. A. Aubert.
Spare Copies 8.

856/16

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1882} Madras.

PUBLIC WORKS.

Dated January, 14*th*.

Rcd. *Encl.*

G.O., 14th Jan. 1882, No. 120 W.

JANUARY.

Nos. 69-70.

Registrar's and Sub-Registrar's Offices.—The standard designs for —, ordered to be lithographed and circulated for adoption in the Public Works Department.

No. 73
Dn

Supdg. Engineer's office IV circle
Coimbatore, 19th March 1884

From,

The Superintending Engineer
IV Circle

To,

The Inspector General
of Registration

Sir,

With reference to G.O. No. 1658 W of 13th June 1883, I have the honor to forward for transmission to Government for sanction a Site Plan and an Estimate amounting to Rs 3370, with a Report and Duplicate abstract Estimate for constructing a Sub Registrar's Office at Udipi in the South Canara District.

2 The office will be built in accordance with the Standard design sheet No. 22, circulated with G.O. No. 120 W of 14th January 1882 with certain slight deviations as follow to suit the

Enclosures-
1 Site Plan
1 Estimate
Complete
1 Duplicate
Abstract
Estimate

the locality, viz:-

I The depth of concrete in foundation is increased from 1 to 1½ feet and the corresponding depth in masonry is reduced from 3½ to 3 ft.

II The breadth of the verandah wall is increased from 1 to 1½ feet to suit the size of the Laterite stones available.

III Glazed shutters are provided inside the venetian windows.

IV Weather boards have been allowed over windows in Office and record rooms.

I have the honor to be
Sir
Your Most obt. servt

L. Beatty - Colonel RE
Supdg: Engineer IV Circle

L. N. 710. 21. March 96

Madras

Submitted for the sanction of the Government.

2. It is very desirable after what has happened recently at Bellary that the windows in the office rooms should be with reference by bolts & hasps. By Command of his Excellency the Governor in Council

for the Chief Secretary to the Government -

2
857/18

Jud Dep. 20/2-82: 303 to.
" 7-83: 1707 to.

CORRECT No.

Judicial (Jud) Department

Registration

27 MAR 84
SECRETARIAT TO GOVERNMENT
REVENUE DEPARTMENT MADRAS

P3

No 699.

Transferred to the Public Works Department.

By order

For Mr Minnick
A. Clerk. Levy
26-3-84.

From.

The Inspector General of Registration Madras

To.

The Chief Secretary to the Government Fort St. George

Dated 21st March 1884
Received 23rd March 1884
G.O. No. 710. Jud.
Enclosure One plan

Submitting for the sanction of the Government a plan & Estimate from the Superintending Engineer IV. Circle, for constructing a Sub Registrar's office at Udipi in South Canara dt.

B & R
at work

No 856

PUBLIC WORKS DEPARTMENT.

850
19

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the

March 28 1884

READ the following

Encl. Jud. Depart. No 699 dy 26-3-84.

The estimate amounting to Rupees 3,370. for constructing a Sub-Registrar's office at Udipi, in the South Canara District, is sanctioned, for execution when funds are available.

2. The attention of the Supply Engr is called to the suggestion of the Inspr Genl of

Registration —

3. This sanction has been registered as Provl No 246 W of 1884-85, & classified as Civil Buildings, Original Works.

CJ.
28-3-84

LL.
28-3-84

— BM

S. S. IV Circle, with 3 enclos

Earthwork with detailed abstract

Jud. Depts

Public Works Department, 1883-84.

850/20.

Current No. 2793

Letter No. 599

Dated the 20th March 84

From the Asst Secy to Govt

NOTE OF REMARKS.

1. This estimate, with a site plan, for constructing a Sub Registrars Office at Medipai in the South Arcot District, has been submitted with reference to G.O. No. 1658 W. of the 13th June 1883. The estimated amount is Rs. 3370.

2. The structure is to be built in accordance with the standard design No. 22 (tiled roofed) circulated with G.O. No. 120 W. of the 12th Jan. 1882 — with the following slight deviations: — Laterite in mortar is to be used instead of brick in mortar, in the foundation, the depth of concrete is to be increased 1/2 foot, while

856/23

2793.

Govt. of (1883) Madras.

PUBLIC WORKS

(23)

August

Dated

Rece. Encl.

G. O., 28th March 1884 No. 850.

Nos.

Sub Registrar's Office at Adapi

Salary of Rs 33/-

for Cowdia —

in the South Canara

Dist, sanctioned.

60

4/45 - 20 28/3

4/50

Sub Registrars