P. W. C. No. 824, 90

139/95 / Rk/56

664/95

(1) Number of pages 34

(2) Date of repair 9-11-87

(3) Initials of the Referencer

TAMIL NADU ARCHIVES

GOVERNMENT OF TAMIL NADU

P. W. D. DEPARTMENT

G.O. No. B.P. No.	2344-W.	Press. Mis.
Dated	~~10~~ 9 - 10 - 1885 ~~198~~.	

Not to be folded or roughly handled

Archives I--10,006 I -80.

2344
-1-

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

Read—the following paper :—

Proceedings of the Board of Revenue, dated 14th August 1885, Mis. No. 7489.

Read—the following letter from J. B. PENNINGTON, Esq., Collector of Tanjore, to the Secretary to the Board of Revenue, dated Vallam, 21st July 1885, No. 4537 :—

With reference to paragraph 2 of G.O., No. 491, Public Department, dated 11th March 1884, I have the honor to submit, herewith, the plans and estimates, for the construction of police huts at certain land custom stations in the district, together with reports, received from the Superintending Engineer, VI Circle, through the Superintendent of Police. The estimates in question are those referred to in G.O., No. 1927 W., dated 8th August 1884, communicated in Board's proceedings, Mis. No. 8428, dated 4th September 1884.

Resolution—dated 14th August 1885, Mis. No. 7489.

Submitted to Government, with reference to G.O., dated 28th August 1884, Mis. No. 3765, Revenue.

(True Extract.)

(Signed) E. GIBSON,
Secretary.

No. 4864, Revenue.

Approved and transferred to the Public Works Department.

OOTACAMUND,
11th September 1885.

(Signed) W. WILSON,
Ag. Secretary to Government.

ORDER—dated 9th October 1885, No. 2344 W., Public Works.

The estimates for constructing huts for the land custom police at the undermentioned stations, in the Tanjore district, are sanctioned, for execution when funds are available, and classified as Civil Buildings, Original Works :—

			RS.			
(1)	10	Huts at Nandalar chowkey...	3,945	Provincial	No. 135 W.	of 1885-86.
(2)	6	Do. at Nalladi	1,950	Do.	„ 136 W.	do.
(3)	11	Do. at Sannamangalam ...	3,585	Do.	„ 137 W.	do.
(4)	7	Do. at Allathur	2,340	Do.	„ 138 W.	do.
(5)	5	Do. at Kovilkandangudi ...	1,690	Do.	„ 139 W.	do.
(6)	5	Do. at Seshalamulai ...	1,756	Do.	„ 140 W.	do.
(7)	9	Do. at Velangudi ...	3,130	Do.	„ 141 W.	do.

2. The notification relative to the acquisition of the sites, referred to in G.O., No. 1927 W., dated 8th August 1884, will be forwarded to the Superintending Engineer for revision and resubmission through the Collector of Tanjore.

(True Extract.)

Lieut.-Colonel, R.E.,
Offg. Under Secy. to Govt., P.W.D.

To the Superintending Engineer, VI Circle, with seven enclosures and draft notification.
„ Examiner, Public Works Accounts, with three duplicate abstract estimates for (1), (3) and (7) and with four original abstract estimates for (2), (4), (5) and (6), for note and return to Superintending Engineer, VI Circle.
„ Revenue Department.
„ Judicial „

Exd. E. Fernandez.
Spare Copies

2

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of | 1885 | Madras.

PUBLIC WORKS.

Dated October, 9th.

Recd. *Encl.*

G.O., 9th Oct. 1885, No. 2344 W.

OCTOBER.

Huts for Land Custom Police in the Tanjore District

Estimates for —, sanctioned.

STANDARD DESIGN FOR POLICE HUTS.

Design No. 1.

General Specification of Work to be performed in erecting one pair of Police Huts with Mud Walls and Tiled Roof.

Wall Builder.—Excavate the ground to the depth of 12″ and well water and ram the bed. Build the mud walls with closely beaten material, tapering from 2′ at the bottom to 1′ 6″ at the top. Insert the verandah posts and window and door frames at the proper heights, and provide well-seasoned lintels of common jungle-wood 1½″ thick.

Mud Plasterer.—Make up the floor and finish off with cow-dung in the usual way.

Plaster the walls smooth.

Carpenter.—Provide jungle-wood posts, doors, window frames, and breastsummer.

Provide and fix jungle-wood or palm tree couples and rafters.

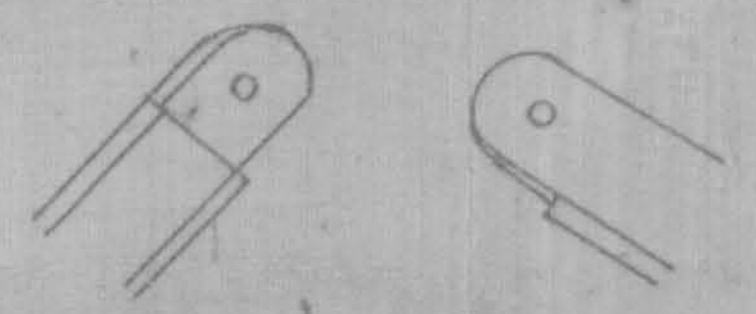

Each rafter will be smoothed by an adze where it joins or crosses another.

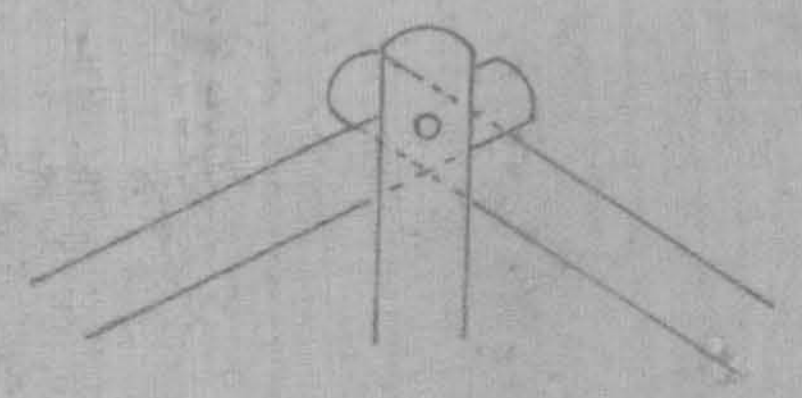

The rafters and upper end of king piece will be spiked with a half-inch spike; the lower end of the king piece and the tie in two pieces will also be spiked. The ties will rest on the wall and the rafters project.

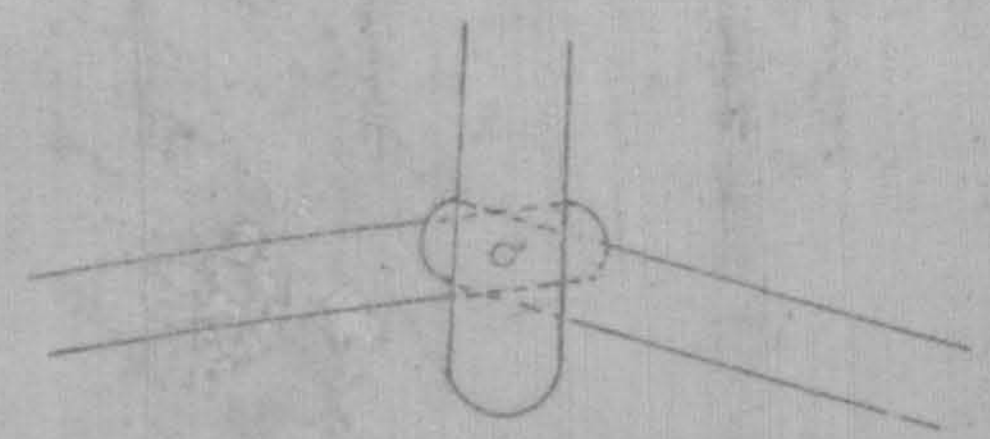

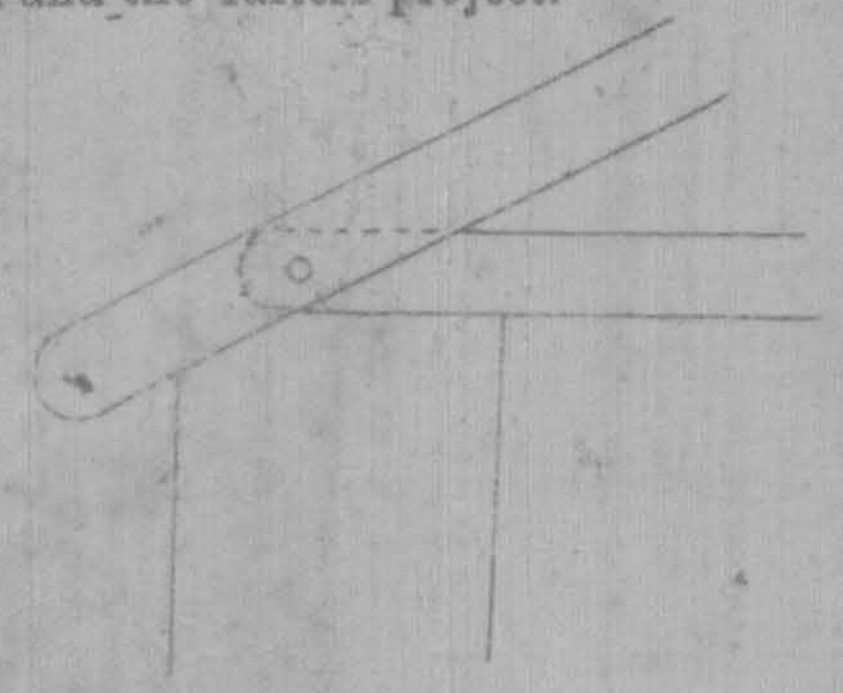

Roofer.—Finish the roof with well-burnt pantiles laid on a bamboo frame in the usual manner. Protect the end and over the division wall with chunam bands.

Whitewasher.—Wash the whole of the interior and exterior with a wash composed of 30 white and 1 yellow. Tar all the timber with two coats coal-tar.

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

ESTIMATE for constructing two Police Huts with Mud Walls and Tiled Roofing according to Standard Design No. 1, dated 9th December 1879.

Detailed Quantities.

Particulars of Work.	No.	Length.		Breadth.		Depth.		Contents.	Total.
		FT.	IN.	FT.	IN.	FT.	IN.		
Excavation for Foundations.									
Longitudinal walls	4	12	0	2	0	1	0	96	
Do.	4	12	0	1	6	1	0	72	
Transverse walls	3	20	0	2	0	1	0	120	
Compound walls	3	15	0	1	6	1	0	133	
Do.	1	29	6	1	6	1	0		
Latrine walls	2	7	0	1	6	1	0		
Cubic feet ...	...	...		...		...		421	
Cubic yards ...	...	...		...		...		...	16
Mud Walling.									
Longitudinal walls	4	12	0	1	9	9	0	756	
Do.	4	12	0	1	6	2	0	144	
Do.	2	6	0	1	3	5	0	75	
Transverse walls	3	12	0	1	9	9	0	567	
Do.	6	4	0	1	9	8	0	336	
Gables	3	10	0	1	6	1	6	68	
Fire-places	2	2	9	1	0	1	0	6	
Compound walls	3	15	0	1	3	6	0	338	
Do.	1	29	6	1	3	6	0	221	
Latrine walls	2	7	0	1	3	6	0	105	
									2,616
Deductions.									
Doors	4	2	3	1	9	5	9	91	
Do.	2	2	3	1	3	5	0	28	
Windows	2	1	9	1	9	3	9	23	
									142
Cubic feet ...	...	...		...		...		...	2,474
Flooring with Mud.									
Rooms	2	12	0	8	0	1	0	192	
Verandahs	4	12	0	2	9	1	0	132	
Cubic feet ...	...	...		...		...		324	
Jungle-wood.									
Posts	8	6	6	0	4½	0	4½	7	
Breastsummers	4	16	0	0	4	0	5	9	
Rafters	40	11	9	0	3	0	4	39	
Collar pieces (4 for each room) ...	8	11	6	0	3	0	3	6	
Uprights (do.) ...	8	3	6	0	3	0	3	2	
Lintels over doors	4	3	9	1	0	0	1½	2	
Do. windows	2	3	3	1	0	0	1½	1	
Cubic feet ...	...	...		...		...		66	
Batten Doors and Windows with Frames.									
Doors	4	2	3	...		5	9	52	
Do.	2	2	3	...		5	0	23	
Windows	2	1	9	...		3	9	13	
Square feet ...	...	...		...		...		88	

Detailed Quantities—cont.

Particulars of Work.	No.	Length.		Breadth.		Depth.		Contents.	Total.
		FT.	IN.	FT.	IN.	FT.	IN.		
Roofing with pantiles over bamboo reepers.	...	31	6	...		24	0	756	
Squares ...	...	...		...		...		...	7·56
Coping to compound wall with pantiles ...	3	15	0	...		...		45	
	1	30	0	...		...		30	
	2	7	0	...		...		14	
Lineal feet ...	...	...		...		...		89	
Whitewashing.									
Rooms	2	40	0	...		7	0	560	
Gables	4	8	0	...		1	6	48	
Verandahs	4	12	0	...		7	0	336	
Do.	8	4	0	...		6	0	192	
Do.	2	6	0	...		5	0	60	
Exterior.									
Basement	4	12	0	...		1	0	48	
Walls	2	22	3	...		6	0	267	
Gables	2	20	0	...		2	6	100	
Walls	2	6	3	...		6	0	75	
Do.	1	1	9	...		6	0	11	
Do.	1	1	0	...		6	0	6	
Compound wall...	3	15	0	...		9	0	405	
Do.	1	27	0	...		9	0	243	
Latrine wall	2	7	0	...		9	0	126	
Door jambs	4	13	9	...		1	9	96	
Do.	2	10	0	...		1	3	25	
Window jambs	2	11	0	...		1	9	39	
									2,637
Deductions.									
Doors ... ... 2 ×	4	2	3	...		5	9	104	
Do. ... ... 2 ×	2	2	3	...		5	0	45	
Windows ... ... 2 ×	2	1	9	...		3	9	26	
									175
Square feet ...	...	...		...		...		...	2,462
Squares ...	...	...		...		...		...	24·62
Tarring Woodwork.									
Doors and windows	2	88	0	...		..		176	
Posts	8	6	6	...		1	3	65	
Breastsummers	4	16	0	...		1	6	96	
Rafters	40	11	9	...		1	2	548	
Collar pieces	8	11	6	...		1	0	92	
Uprights	8	3	6	...		1	0	28	
Lintels	4	3	9	...		2	3	34	
Do.	2	3	3	...		2	3	15	
Square feet ...	...	...		...		...		1,054	
Squares ...	...	...		...		...		...	10·54

Estimate for constructing two Police Huts with Mud Walls and Tiled Roofing according to Standard Design No. 1, dated 9th December 1879.

Abstract.

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
16 C. yds.	Excavation for foundations ...			
2,474 C. feet.	Mud walling			
324 „	Flooring with mud			
66 „	Jungle-wood wrought and put up.			
88 Sq. feet.	Do. batten doors and windows with frames.			
7·56 Squares.	Roofing with pantiles over bamboo reepers.			
89 L. feet.	Coping to compound walls with pantiles in chunam.			
24·62 Squares.	Whitewashing			
10·54 „	Tarring wood-work			
	Contingencies at 5 per cent. ...			
	Cost of two huts ...			
	For one ...			

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

Madras,
23rd December 1879.

(Signed). T. K. GUTHRIE, Major,
Ag. Asst. Inspector-General,
for Inspector-General of Police.

-5-

STANDARD DESIGN FOR POLICE HUTS.

Design No. 2.

General Specification of Works to be performed in erecting one pair of Police huts with walls of burnt brick laid in mud and tiled roofing.

Excavation.—Excavate the trenches to the various depths shown on the drawing and well ram and pun the beds.

Bricklayer.—Ram in 6 inches of concrete and bring to a sound, well consolidated state and an even upper surface.

Build the walls in bricks cast from a mould 10″ × 5″ × 3″ well burnt and laid in fine worked slip. Fix all wood-work during the execution of the masonry. Build in English bond. After the roof is on rake out all the joints to the extent of $\frac{3}{4}$ of an inch from the face and point in good mortar composed of one part fresh slacked lime, two parts pounded brick.

Wash the interior and exterior with a wash composed of 30 lime, 1 yellow ochre.

Carpenter.—Provide jungle-wood posts, doors, window frames, and breastsummers.

Provide and fix jungle-wood or palm tree couples and rafters. Each rafter will be smoothed by an adze  where it joins or crosses another.

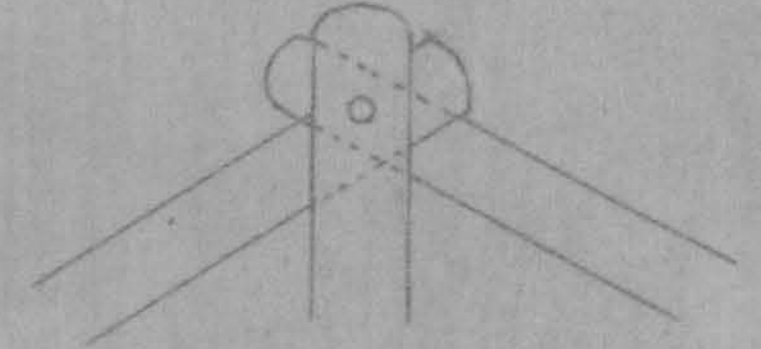

The rafters and upper end of king piece will be spiked with a half inch spike; the lower end of the king piece and the tie in two pieces will also

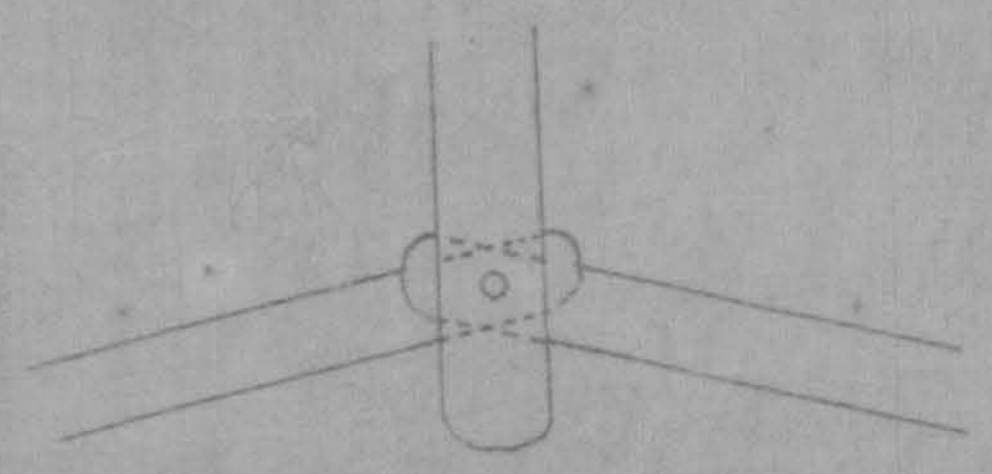

be spiked. The ties will rest on the wall and the rafters project.

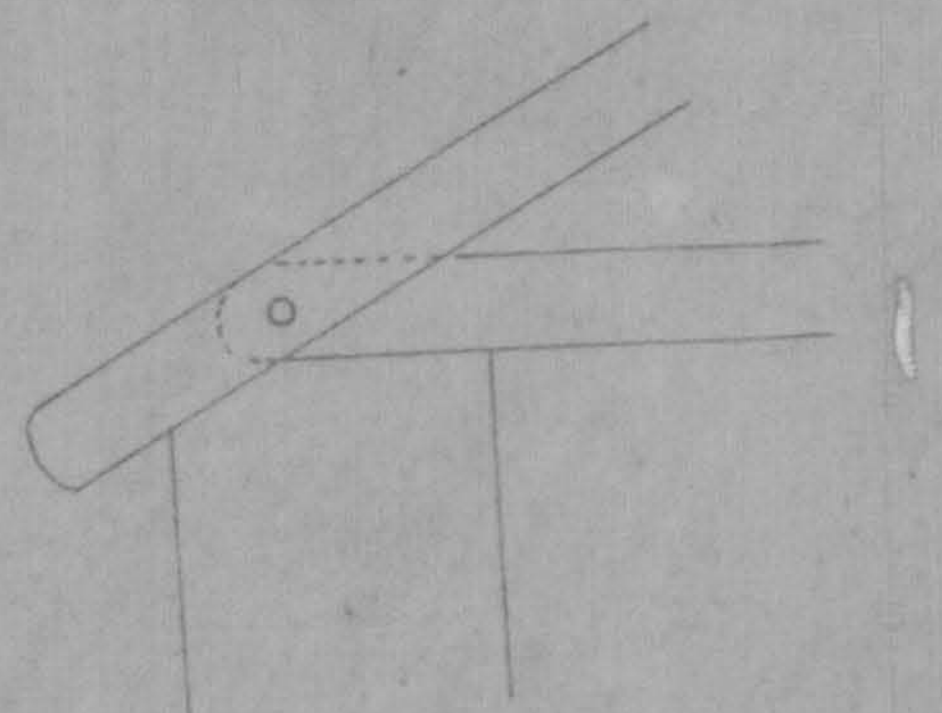

Roofer.—Finish the roof with well-burnt pantiles laid on a bamboo frame in the usual manner. Protect the end and over the division wall with chunam bands.

(Signed) R. F. CHISHOLM,
Consulting Architect to Gov ..ment.

Estimate for constructing two Police huts with walls of burnt brick in mud and tiled roofing according to Standard Design No. 2, dated 9th December 1879.

Detailed Quantities.

Particulars of Work.	No.	Length.		Breadth.		Depth.		Contents.	Total.
		FT.	IN.	FT.	IN.	FT.	IN.		
Excavation for foundations.									
Longitudinal walls	8	11	4	1	6	1	6	204	
Transverse walls	3	18	4	1	6	1	6	124	
Compound walls	3	14	4	1	6	1	6	97	
Do.	1	27	2	1	6	1	6	61	
Latrine walls	2	6	7	1	6	1	6	30	
Cubic feet ...	...	...		...		...		516	
Cubic yards ...	...	...		...		...		...	19
Concrete 6″ thick.									
One-third of excavation ... C. feet...	...	...		...		...		172	
Burnt brick in mud.									
Longitudinal walls	4	12	0	0	10	9	0	360	
Do.	4	12	0	0	10	2	0	80	
Do. in side of cook-room ...	2	6	0	0	10	5	0	50	
Transverse walls	3	9	8	0	10	9	0	218	
Do.	6	4	0	0	10	8	0	160	
Gables	3	8	10	0	10	1	6	33	
Fire places	2	3	2	1	0	1	0	6	
Compound wall	3	15	0	0	10	6	0	225	
Do.	1	26	6	0	10	6	0	133	
Latrine wall	2	6	7	0	10	6	0	66	
									1,331
Deductions.									
Doorways	4	2	3	0	10	5	9	43	
Do.	2	2	3	0	10	5	0	19	
Windows	2	1	9	0	10	3	9	11	
									73
Cubic feet ...	...	...		...		...		...	1,258
Flooring with mud.									
Rooms	2	12	0	8	0	1	0	192	
Verandahs	4	12	0	3	2	1	0	152	
Cubic feet ...	...	...		...		...		344	
Jungle-wood wrought and put up.									
Posts	6	0	4½	0	4½	7	0	6	
Breastsummers	4	14	0	0	4	0	5	8	
Rafters	36	10	9	0	3	0	4	32	
Collar pieces (4 for each room) ...	8	10	6	0	3	0	3	5	
Uprights	8	3	0	0	3	0	3	2	
Lintels over doors	4	3	9	0	9	0	1½	2	
Do. windows	2	3	3	0	9	0	1½	1	
Cubic feet ...	...	...		...		...		56	

Detailed Quantities—cont.

Particulars of Work.	No.	Length.		Breadth.		Depth.		Contents.	Total.
		FT.	IN.	FT.	IN.	FT.	IN.		
Batten doors and windows with frames.									
Doors	4	2	3	...		5	9	52	
Do.	2	2	3	...		5	0	23	
Windows	2	1	9	...		3	9	16	
Square feet ...	...	...		...		...		88	
Pointing with chunam.									
Interior walls	2	40	0	...		7	0	560	
Gables	4	8	0	...		1	4½	44	
Verandahs	4	12	0	...		7	0	336	
Do.	8	4	0	...		6	0	192	
Do.	2	6	0	...		5	4	64	
Exterior walls	2	6	0	...		6	0	72	
Do.	3	0	10	...		6	0	15	
Do.	2	17	8	...		8	6	300	
Compound walls	3	15	0	...		10	6	473	
Do.	1	25	3	...		10	6	265	
Latrine walls	2	6	7	...		10	6	138	
Door jambs	4	13	9	...		0	10	46	
Do.	2	10	0	...		0	10	17	
Window jambs	2	11	0	...		0	10	18	
									2,540
Deductions.									
Doors ... ... 2 ×	4	2	3	...		5	9	104	
Do. ... ... 2 ×	2	2	3	...		5	0	45	
Windows ... ... 2 ×	2	1	9	...		3	9	26	
									175
Square feet ...	...	...		...		...		...	2,365
Squares ...	...	...		...		...		...	23·65
Whitewashing.									
Interior and exterior ... Squares ...	...	...		...		...		...	23·65
Tarring wood-work.									
Doors and windows	2	88	0	...		...		176	
Posts	6	7	0	...		1	3	53	
Breastsummers	4	14	0	...		1	6	84	
Rafters	36	10	9	...		1	2	452	
Collar pieces	8	10	6	...		1	0	84	
Uprights	8	3	0	...		1	0	24	
Lintels over doors	4	3	9	...		1	9	26	
Do. windows	2	3	3	...		1	9	11	
Square feet ...	...	...		...		...		910	
Squares ...	...	...		...		...		...	9·10
Roofing with pantiles over bamboo reepers.	..	28	0	...		22	0	616	Sq. ft.
Squares ...	...	...		...		...		...	6·16

Estimate for constructing two Police huts with walls of burnt brick in mud and tiled roofing according to Standard Design No. 2, dated 9th December 1879.

Abstract.

Quantity.	Item.	Rate.	Per	Amount.
		RS. A. P.		RS. A. P.
19 C. yds.	Excavation for foundations ...			
172 C. feet.	Concrete			
1,258 "	Burnt brick in mud			
344 "	Flooring with mud			
56 "	Jungle-wood wrought and put up.			
88 Sq. feet.	Batten doors and windows with frames.			
23·65 Squares.	Pointing with chunam			
23·65 "	Whitewashing			
9·10 "	Tarring wood-work			
6·16 "	Roofing with pantiles over bamboo reepers.			
	Contingencies at 5 per cent. ...			
	Cost of two huts ...			
	For one ...			

(Signed) R. F. CHISHOLM,
Consulting Architect to Government.

Madras,
23rd December 1879.

(Signed) T. K. GUTHRIE, Major,
Ag. Asst. Inspector-General,
for Inspector-General of Police.

7

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

14th January 1880, No. 93 W.

Buildings and Roads.
Civil Works.

Read the following papers :—

No. 21. From the Consulting Architect, dated 12th December 1879, No. 558.

No. 21-A. " Inspector-General of Police, dated 23rd December 1879, No. 5,817.

No. 22. Order thereon, 14th January 1880, No. 93 W.

The Government approve the standard designs for Police huts submitted by the Consulting Architect, and direct their adoption in supersession of all previous designs for such buildings.

2. The designs will be lithographed and the specification and estimate of quantities printed, and circulated for the information of the Department.

(True Extract.)

(Signed) R. H. SANKEY, Colonel, R.E.,
Secretary to Govt., P.W.D.

To all Superintending Engineers.
To the Consulting Architect.
" Judicial Department.

Exd. A. F. Goodall.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of (1880) Mad

PUBLIC WORKS.

To

ALL SUPERINTENDING ENGINEERS,

&c., &c.,

Dated January 14th.

Issued

Recd. *Encl.*

G. O., *14th January* 1880, *No.* 93 W.

JANUARY.

Nos. 21-22.

Standard Designs for Police Huts.—Approves the —, and directs their adoption in supersession of all previous designs for such buildings.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil and Military Works.

ORDER—dated 21st February 1884, No. 483 W., Public Works.

In modification of the practice at present followed with regard to the submission of plans and estimates for buildings required by other departments, the Government direct that the following procedure be invariably adopted in future.

2. Plans and estimates for buildings required by the Revenue Department should be submitted by the Executive Engineer to the Superintending Engineer, who, after scrutiny, will forward them to the Collector of the district for approval and counter-signature. If the Collector be satisfied as to the suitableness of the proposed accommodation, &c., he will transmit the papers through the Board of Revenue to Government in the Revenue Department, by whom, if approved, they will be transferred to the Public Works Department for disposal, after final scrutiny by the Chief Engineer.

3. In the case of plans and estimates for court-houses, the documents will be forwarded by the Superintending Engineer to the District Judge for transmission, through the High Court, to Government in the Judicial Department, and the same principle will be followed with regard to estimates for Registration, Police, Jail, and other Civil Departments. The Superintending Engineer will forward the documents to the Head of the Department concerned, who will submit them to Government in the Department of the Secretariat from which he receives his orders.

4. The course at present adopted with regard to estimates for Military buildings is laid down in G.O. No. 1381 W., dated 14th June 1880, but here also a modification of practice appears desirable. In future such plans and estimates will be forwarded by Superintending Engineers for approval to the General Officer Commanding the District or Division. The General Officer will transmit the papers to the Quartermaster-General, who,* after obtaining the approval of His Excellency the Commander-in-Chief, will submit them direct to Government in the Military Department. After approval in the Military Department they will be transferred to the Public Works Department for disposal, after final scrutiny by the Chief Engineer.

5. It must be understood that these orders apply only to works which are beyond the power of sanction of local authorities, and are not intended to alter the procedure laid down in G.O., No. 3211 W., dated 6th December 1882, with regard to the submission of Local Fund projects.

---

* NOTE.—In the case of Ordnance, Commissariat or other departmental buildings, the approval of the head of the department should be obtained before the plans and estimates are submitted to His Excellency the Commander-in-Chief.

6. The Secretary, Code Committee, will take the necessary steps for embodying these rules in the Public Works Code, in modification of paragraphs 1168 and 1335.

(True Extract.)

(Signed) J. SHAW-STEWART, Colonel, R.E.,
Secretary to Govt., P.W.D.

To Superintending Engineers.
To the Consulting Architect to Government.
„ Examiner, Public Works Accounts.
„ Public, &c., Departments.
„ Revenue Department.
„ Military „

Exd. A. Grubert.
Sdare Copies

7-

BUILDINGS AND ROADS.
CIVIL AND MILITARY WORKS.

Govt. of (1884) Madras.

PUBLIC WORKS.

Dated February, 21st.

Recd. *Encl.*

G.O., 21st Feb. 1884, No. 483 W.

FEBRUARY.

Buildings required by other Departments

Modification of the practice for the submission of plans and estimates for —.

No. 4537

10

Tanjore Collector's Office,
Vallam 21 July 1885.

BOARD'S GEN. REG. No 4269 OF 1885

From
J. B. Pennington Esquire
Collector
Tanjore;

To
E. Gibson Esquire,
Secretary to the
Board of Revenue,
Madras.

Sir,

With reference to para 2 of Government Order No: 491 Public Department dated 11th March 1884, I have the honour to submit herewith the plans and Estimates for the construction of 7 Police huts at certain Land Custom stations in the District, together with

with reports received from the Superintending Engineer, 6th Circle, through the Superintendent of Police. The Estimates in question are those referred to in Government Order No: 1927 W dated ~~9th~~ 8th August 1884, communicated in Board's Proceedings Mis: No: 8628 dated 6th September 1884.

I have the honour to be,
Sir,
Your most Obed^t. Servt.,

J. Pennington
Collector.

Rec 1/8/85

Proceedings of the Board of Revenue.

Dated 14th August 1885.
No. 7489 Mis

READ Letter from the Collector of Tanjore dated 21st July 1885 No. 4537 / 12

Resolution G/14th Aug/85 No. 7489

Submitted to Government with reference to G. O. dated 28th August 1884, Mis No. 3765. R. D.

+ Not comm^d - 22.9.85 -

/ True extract /

Secretary

To The Secretary to Govt. R. D.
with letter & enclosures in original
Copy to the Collector of Tanjore

T.D.C.
ud.

B. O. No 375 W. 2.2.83.
G. O. No 483 W. 21.2.84
" " 1927 W. 8.8.84. Orig.
" " 93 W. 14.1.80.

G.R.Cir. 8246 65

REVENUE (1885) DEPARTMENT.

No. 6010

From Board of Revenue

Dated 14th } August 1885
Recd. 18th }
21st September 1885

No. 7489 Rev.

17.4.83

E.9

SUBJECT.

Subg. to Govt. letter from the Collector of Tanjore forwarding Estimates &c. for the construction of Police huts at certain Land Customs Stations in the District.

Mis. No. 4864.

Approved and transferred to the Public Works Department.

Ootacamund
11th September 1885 }

Resubmitted to G. 31.9.85 R9/10/85

G. 30.9.85 R4/10/85

Public Works Department, 1885-86.

Current No. 8246
Letter No. 4864
Dated the 4th Sept/85
From the Secy to Govt. Rev. Dept.

NOTE OF REMARKS.

1. In obedience to G.O. No. 375 W. of the 2nd Feb./83, and G.O. No. 1927 W. of the 8th Augt./84 the accompanying plans and estimates are submitted for constructing huts for the land custom police in the Tanjore district at the following stations:— (a) 10 huts at Nandalar Chowkey — Rs. 3,945; (b) 6 huts at Nalladai — Rs. 1,950; (c) 11 huts at Samma-mangalam — Rs. 3,585; (d) 7 huts at Allathur — Rs. 2,340; (e) 5 huts at Kovilkandangudi — Rs. 1,890; (f) 5 huts at Sesha-mulai — Rs. 1,756; and (g) 9 huts at Velangudi — Rs. 3,130.

2. All the proposed huts are to be built on the lines of the standard design No. 2 sanctioned in G.O. No. 93 W. of the 14th Jany/80 modified in each case to

requirements. As may be expected the most marked deviation from the standard design occurs in the foundation but as explained by S.E. VI. circumstances render the alterations necessary. In the case of the 10 huts to be built at Nandalar (a) the depth allowed to the foundation (inclusive of basement) is 12½ feet, but S.E. VI. shows that circumstances fully warrant that depth being adopted. The masonry of the foundations and basements, as well as that in contact with the woodwork of doors and windows and for 1 foot under rafters, is to be brick-in-mortar; the rest is to be brick-in-mud. The roofing is to be of pan tiles on palmyrah couples and reepers. Mud flooring is provided for the huts, a little brick flooring being allowed for the front and rear. In each instance, with the exception of the huts at Allattur (d), provision is made for compensation for land. The rates in all the estimates submitted are fair.

3. The seven estimates now submitted have been countersigned by the Collector of the Tanjore district and have been approved in the Revenue department.

Sanction recommended
AH
Sept. 26. 85

25th Sept./85
BH

Recd in the B Section on the 28th Septr/85

19th R
Cook

C. A. W.

15

These Estimates are for the Construction of huts for land customs police at certain stations in the Tanjore Dist.

In Aug' 84 the Collr. subd. notn. for pubn. for acquisn. of the sites required, but it was ordered that the notn. shd. not issue until the Estimates were recd. The Estimates have now come in — but it seems desirable that the notn. be retd. thro' the Revenue Dept to the Collector.

V/2911

his report S. E. IV
says "the sites selected
for Seshamalai &
Velangudi have
been found unsuit-
-able &c.". Provision
for compensation
for land has been
made in all cases
except Allathur,
the site there being
Govt property.

I send the draft
up in view to the
insertion of a 2nd
para regarding the
acquisition of the
sites in such terms
as you consider

P.W.P.
Civil

PUBLIC WORKS DEPARTMENT.

No. 2344 W

16

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the 7th October 1885

READ the following

Proceedings of the Board of Revenue. H. E. No: 7489 Mis: d/ 14th August 1885.
Endorsement by the Revenue Deptt. H. E. No: 4864 d/ 11th September 1885.

1. The estimates for constructing huts for the land custom police at the undermentioned stations in the Tanjore District, are sanctioned for execution when funds are available, and classified as Civil Buildings, Original Works:—

(1)	10 huts at Nandalar Chowkey	Rs. 3,945 -	Provincial	No: 135 W of 1885-86.
(2)	6 huts at Nalladai	Rs 1,950 -	Do	No: 136 W of - Do -
(3)	11 huts at Sannamangalam	Rs. 3,585 -	Do	No: 137 W of - Do -
(4)	7 huts at Allathur	Rs. 2,340 -	Do	No: 138 W of - Do -
(5)	5 huts at Kovilkandangudi	Rs. 1,690 -	Do	No: 139 W of - Do -
(6)	5 huts at Seshalamalai	Rs 1,756 -	Do	No: 140 W of - Do -
(7)	9 huts at Velangudi	Rs. 3,130 -	Do	No: 141 W of - Do -

2. The notification relative to the acquisition of the sites, referred to in G.O. No 1927 W d/ 9th August 1884, will be forwarded to the Supdg. Engineer, for revision, & resubmission through the Collector of Tanjore.

4.10.85

Desp 6/10/8

To
The Supdg. Engr. VI Circle with 7 enclos. & draft notification
" Examiner P. W. Accts with 3 duplicate abstract estimates for (1), (3) & (7) and with 4 original abstract estimates for (2), (4), (5) & (6), for note and return to S. E. VI
" Revenue Department
" Judicial Department.

W/2919

3.10.85

8246

Govt. of 1885 Madras.

PUBLIC WORKS.

Dated 16/11/85

Recd. Encl

G.O., 9 Dec 1885, No. 2344 W

Huts for Land Customs Police in the Tanjore Dt.

=

Ests for —, sanction

80

6