

(1) Number of pages 14
(2) Date of repair 27.8.87
(3) Initials of the Referencer lms

TAMIL NADU ARCHIVES

GOVERNMENT OF TAMIL NADU

P.W. DEPARTMENT

G.O. No.	645 W	Press.
B.P. No.		Mis.
Dated	16.3.1885	198

long

Not to be folded or roughly handled.

70
645
1
16TH MARCH 1885, No. 645 W., PUBLIC WORKS.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following letter from Lieutenant-Colonel J. L. L. MORANT, R.E.,
Officiating Consulting Architect to the Government of Madras, to the Secretary to Government, Public Works Department, dated Chepāk, 2nd March 1885, No. 1767 :—

I have the honor to submit a revised estimate, amounting to Rs. 5,470, for renewing the roof of the map room of the Revenue Survey office at Chepāk. The original estimate sanctioned in G.O., No. 2486 W., dated 8th October 1884, amounted to Rs. 3,869. The difference (excess), viz., Rs. 1,601, is due to the necessity of providing six additional iron columns. This was found actually necessary during the progress of the work, as the timber beams were found to be made up of pieces and yielded as we were placing the corbels under them. The beams were so thickly covered with paint that their real constitution was concealed.

ORDER—dated 16th March 1885, No. 645 W., Public Works.

The revised estimate, amounting to Rs. 5,470, for renewing the roof of the map room of the Revenue Survey office at Chepāk, is sanctioned in supersession of the estimate referred to in G.O., No. 2486 W., dated 8th October 1884.

2. A sum of Rs. 5,469 has been provided for the work during the current official year.

3. This sanction has been registered as Provincial No. 278 W. of 1884-85, and classified as Civil Buildings, Original Works.

(True Extract.)

Major, R.E.,
Under Secy. to Govt., P.W.D.

To the Consulting Architect, with two enclosures.
" Examiner, Public Works Accounts, with duplicate abstract estimate.
" Revenue Department.

Exd. A. Grubert.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of (1885) Madras.
PUBLIC WORKS.

Dated March, 16th.

Recd.

Encl.

G.O., 16th March 1885, No. 645 W.

MARCH.

Map room of the Revenue
Survey Office, Chepak

Revised estimate for renewing roof of the
—, sanctioned.

8TH OCTOBER 1884, No. 2486 W., PUBLIC WORKS.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

the following letter from Major J. L. L. MORANT, R.E., Officiating Consulting Architect to the Government of Madras, to the Chief Engineer, Public Works Department, dated Chepak, 22nd September 1884, No. 1027:—

I have the honor to submit, for sanction and appropriation of funds, an estimate, amounting to Rs. 3,869, for renewing the teak joists in the map rooms of the Revenue Survey office and for supporting the beams with stone corbels inserted in the walls and a cast-iron column in the centre. This portion of the building is very old, having been constructed by the late Nabob of the Carnatic, and the timbers are affected by dry rot. Their state was brought to my notice by the Superintendent of the Revenue Survey.

2. As the roof is, in my opinion, in a very dangerous state, and as the room is crowded with valuable maps, and its resumption is much required by the Revenue Survey authorities, I have ordered the immediate execution of the work in anticipation of sanction.

ORDER—dated 8th October 1884, No. 2486 W., Public Works.

The estimate, amounting to Rs. 3,869, for renewing the roof of the map rooms attached to the building occupied by the Revenue Survey office at Chepak, is sanctioned, and the amount is appropriated from the reserve with Government.

2. This sanction has been registered as Provincial No. 167 W. of 1884-85, and classified as Civil Buildings, Original Works.

(True Extract.)

(Signed) J. SHAW-STEWART, Colonel, R.E.,
Secretary to Govt., P.W.D.

To the Consulting Architect to Government, with two enclosures.
" Examiner, Public Works Accounts, with abstract estimate.
" Revenue Department.

Exd. A. Grubert.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of Madras.

PUBLIC WORKS.



Dated October, 8th.

Recd.

Encl.

G.O., 8th Oct. 1884, No. 2486 W.

OCTOBER.

Revenue Survey Office at Chepak

Estimate for renewing roof of the map
rooms attached to the building occupied by
the — sanctioned, and funds allotted for the
work.

P. W. D.

Consulting Architect's Office,

Chepak, Madras.

2nd March 1885.

No. 1767

From

The Consulting Architect to the Government of Madras.

To

Secy. to Govt.

The Chief Engineer, Public Works Department.

In,

Enclosures.

1 Comparative
Statement
2 Estimates

I have the honor to submit
a revised Estimate amounting to
Rs 5,470 for renewing the roof of the
Map room of the Revenue Survey
Office at Chepak, the original Estimate
sanctioned in G.O. No. 2486 W. Dated
8th October 1884 amounted to Rs 3869,
the difference (excess) viz. Rs 1601 is
due to the necessity of providing
6 additional iron columns. This
was found actually necessary during
the progress of the work as the
timber beams were found to be
made up of pieces and girdled
as we were placing the concrete

under them. The beams were so
thickly covered with paint that
their real constitution was con-
-cealed

I have the honor to be

Sir

Your most obdt. servant

J. E. Morant

Sd. Col. R. & Co.

Offg. Cong. Archd. to Govt.

645
4

P. W. D.
Roads and Buildings.

From
THE CONSULTING ARCHITECT
TO THE GOVERNMENT OF MADRAS,

To

The Secretary to Govt
P.W. Department

No. 1767

Dated 2nd March 1885

Received

Despatched 3rd March 1885

No. OF ENCLOSURES.

Subject.

Submits revised
Estimate for renewing
roof of the Map
room - Revenue
Survey Office &

Sanction.

Cd.

9.3.85

Public Works Department, 1884-85.

Current No. 1936

Letter No. 1767

Dated the 2nd March 1885

From the Consulting Architect to Govt

NOTE OF REMARKS.

1. The accompanying is a revised estimate for renewing the roof of the Map room of the Revenue Survey Office at Cherpak, and amounts to Rs. 5470 - being Rs. 1001 in excess of the original estimate, Rs. 3869, sanctioned in G.O. No. 2456 of the 8th Octr/84. 2. The excess, Rs. 1001, is due to the provision of six additional iron columns which, while the work was in progress, were found to be necessary for the supports of the timber beams. - The beams, it is said, are made up of pieces but that, owing to a thick coating

of paint on them, the fact was not discovered earlier.

3. The revised estimate has not yet been countersigned by the Supt. of the Rev. Survey, through whom it should have been submitted.

9th March/85
B.H.

Buildings & Works
Paint Works

PUBLIC WORKS DEPARTMENT.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

Under date the 16 March/85

Read the following

From the Consulting Architect to Govt. H. O. No. 1767 d/2nd March 1885.

The revised estimate amounting to Rs. 5,470, for renewing the roof of the map room of the Revenue Survey Office at Chepauk, is sanctioned, in supersession of the estimate referred to in G. O. No. 2486 W dated 8th October 1884.

2. A sum of Rs. 5469 ^{has been} provided for the work during the current official year.

3. This sanction has been registered as Provincial No. 278 W of 1884-85, and classified as Civil Buildings, Original Works.


To The Consy. Architect with 2 encls.
" Examines G. W. Accts with dupli-
" Revenue Department. also estimate

Cd
11.3.85

W.
11.3.85

(Rev. Secy)

845
7

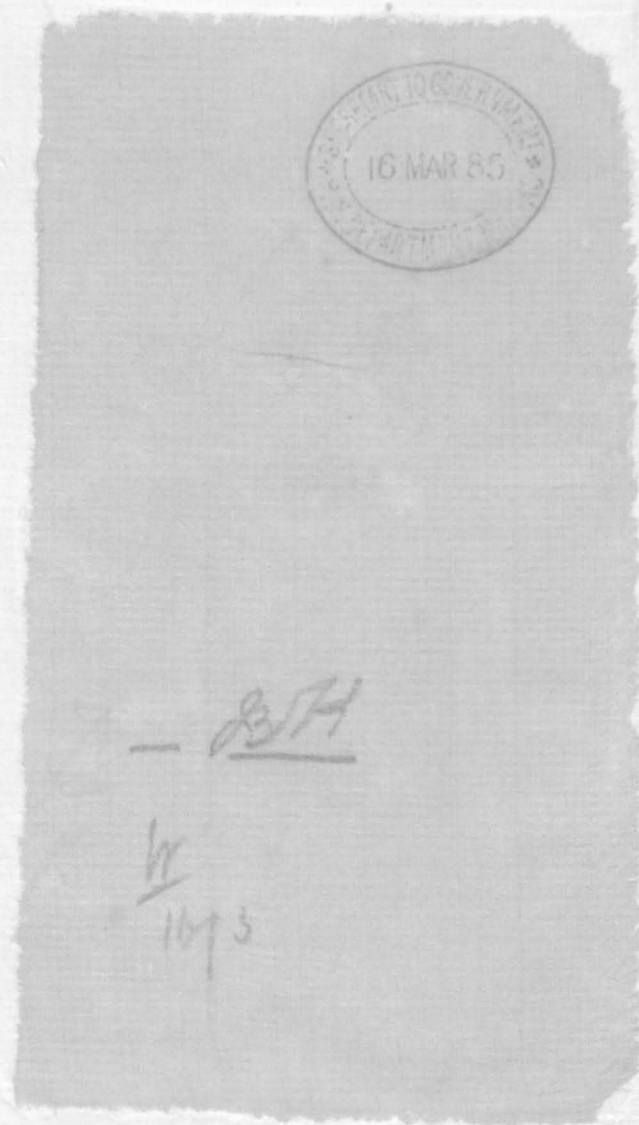

1936

Govt. of Madras.

PUBLIC WORKS.

Dated

14-3-83

Recd.

Encl.

G.O. No. 15404

Map room of the
Survey Office, Madras.

Received for the
Survey Office, Madras.
Survey Office, Madras.
Survey Office, Madras.

70
4

1936