(1) Number of pages 20

(2) Date of repair 4-12-87

(3) Initials of the Referencer

TAMIL NADU ARCHIVES

GOVERNMENT OF TAMIL NADU

P.W. DEPARTMENT

G.O. No. 1202, W
B.P. No. 1203

Press.
Mis.

Dated 12-5-1886 ~~198~~.

277

Not to be folded or roughly handled.

Archives —I 10,006–9 88

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of (1886) Madras.

PUBLIC WORKS.

Dated May, 12th.

Recd. *Encl.*

G.O., 12th May 1886, No. 1203 W.

MAY.

Post Office at Anantapur

Copy of proceedings sanctioning estimate for constructing a — with postmaster's residence, forwarded to the Government of India for approval of certain transfer of funds proposed.

Block plan of Post Office
and Post Master's residence

Office Copy

to be returned to T.

3

3RD CLASS.

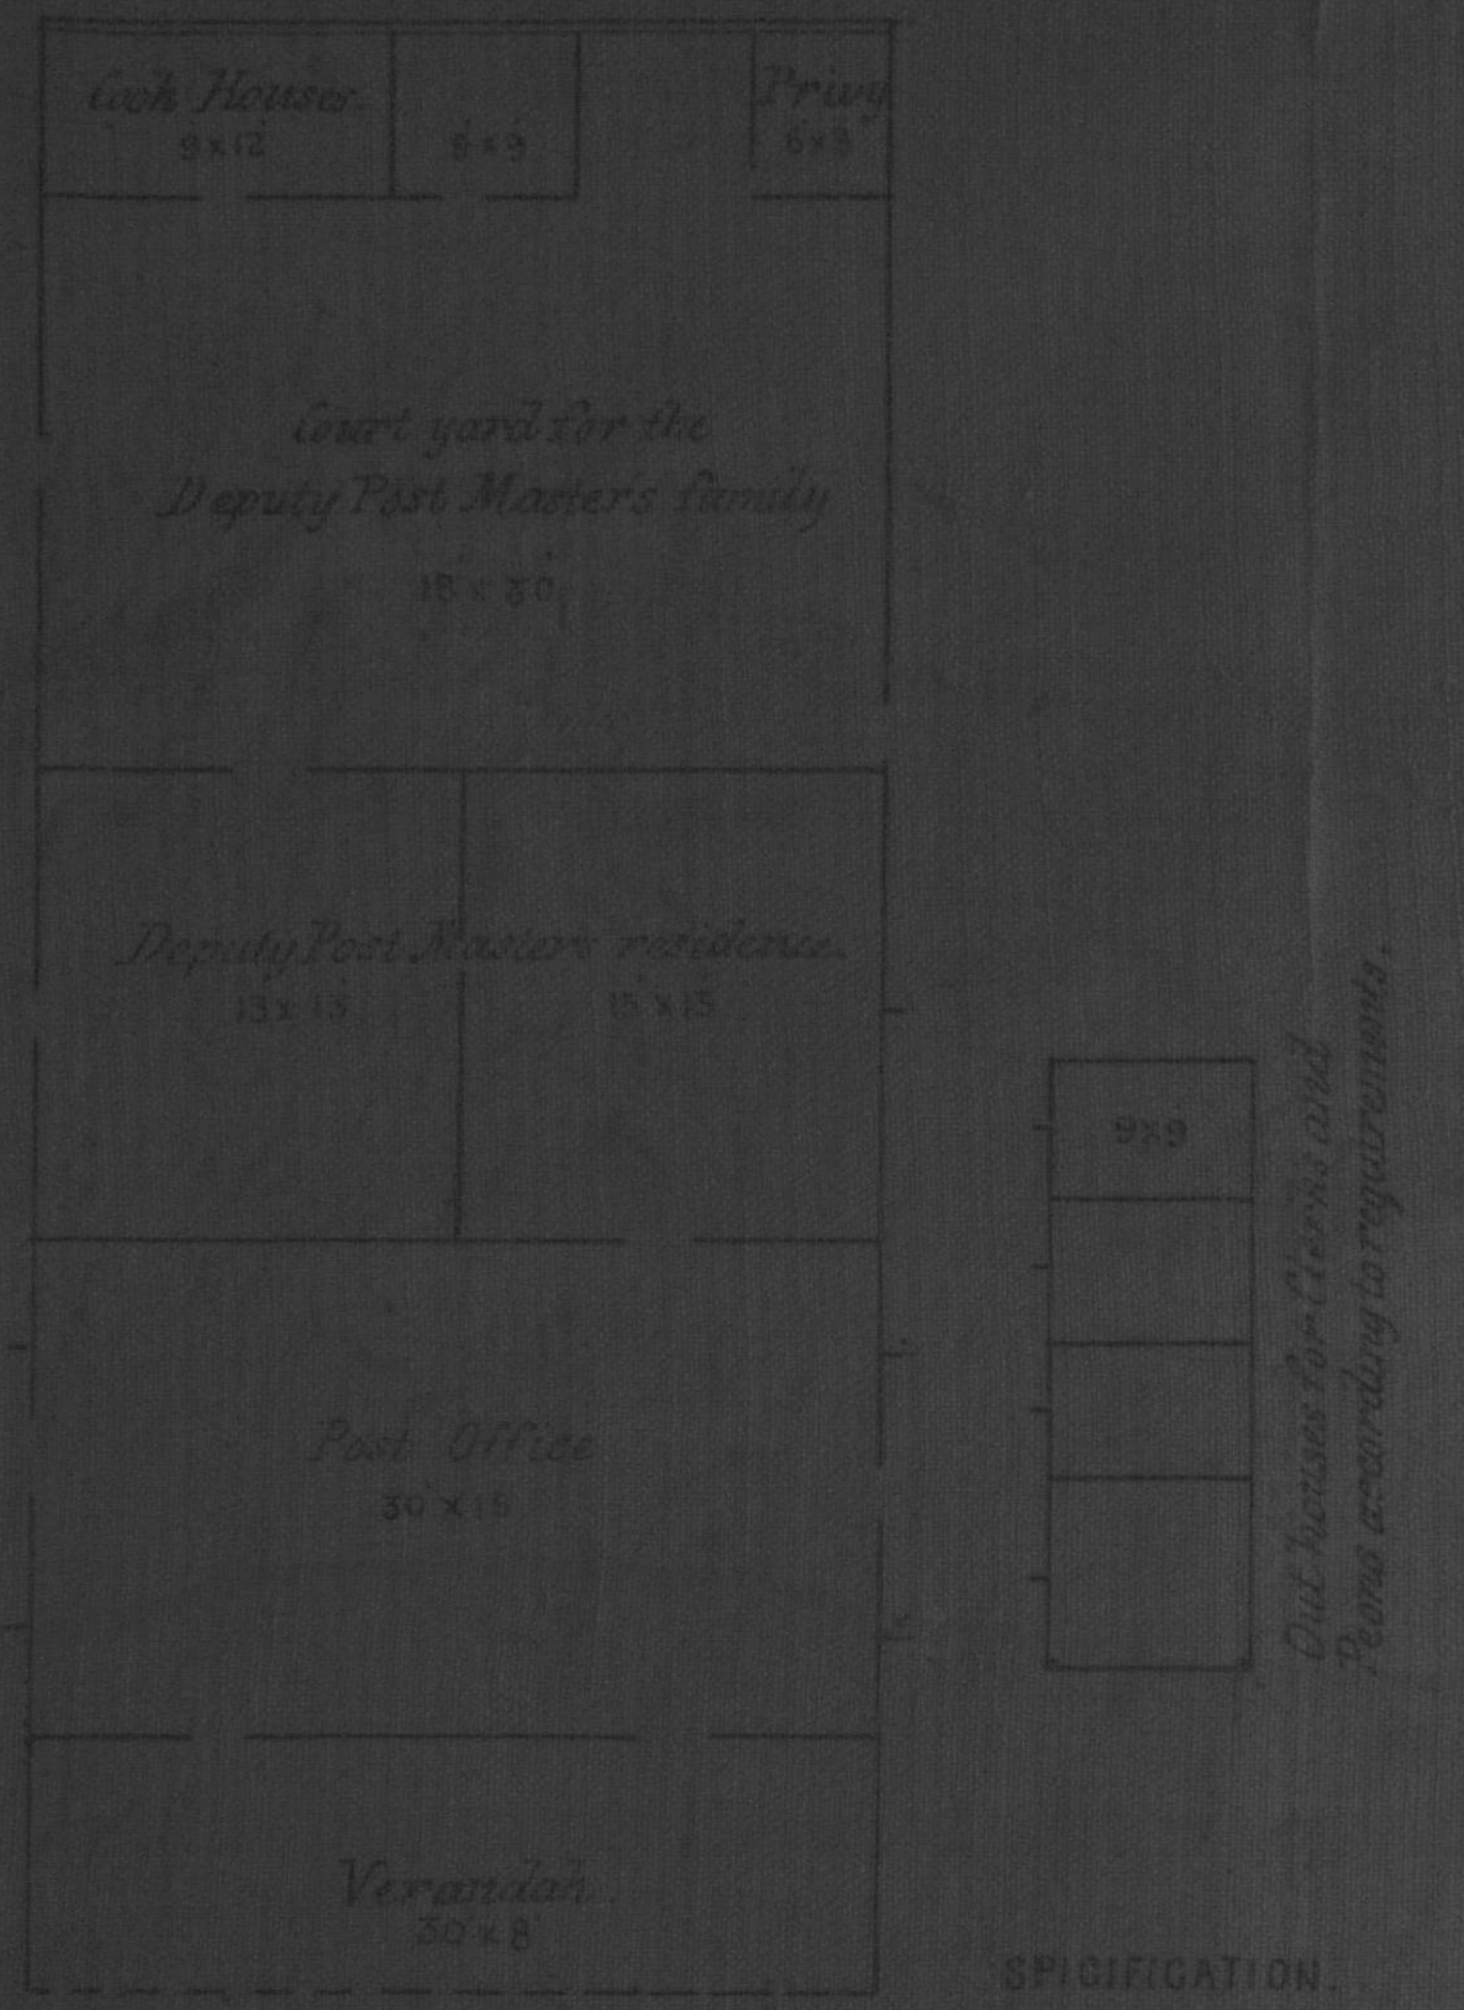
Cook Houses
9x12
8x9
Privy
6x8
Court yard for the Deputy Post Master's family
18 x 30
Deputy Post Master's residence.
15x15
15x15
Post Office
30x15
Verandah
30x8
9x9
Out houses for Clerks and Peons according to requirements.

4TH CLASS.

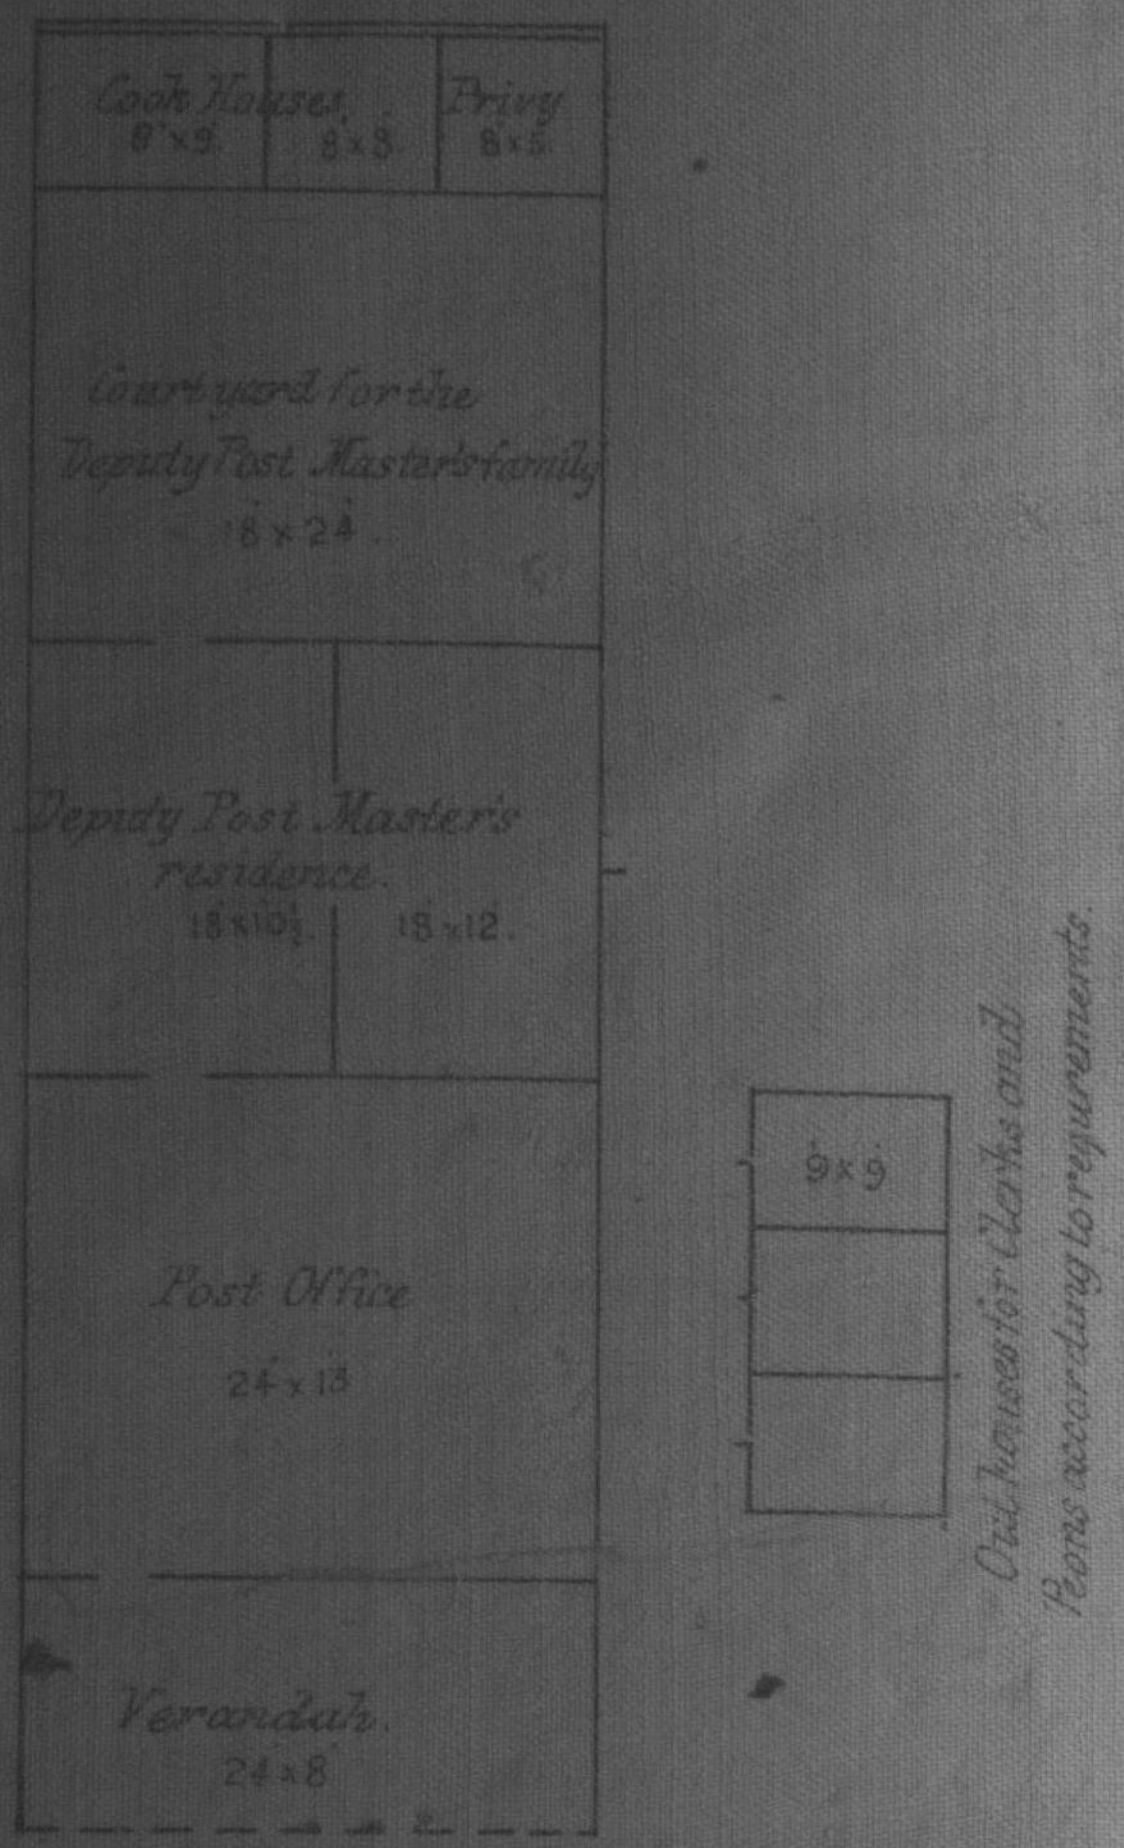
Cook Houses
9x8
8x8
Privy
6x8
Court yard for the Deputy Post Master's family
18x24
Deputy Post Master's residence.
18x10½
18x12
Post Office
24x18
Verandah
24x8
9x9
Out houses for Clerks and Peons according to requirements

SPICIFICATION.

Exterior walls, foundation and plinth, to be of burnt bricks set in mud. Interior walls to be of kutcha bricks, with the exception of door jambs arches and one foot at top, which will be of pucka bri and mortar. The plaster inside to be kutcha and washed with chucknee muttee, excepting the room set aside for the Post Office, which should, when practicable, be white washed to afford a cheerful light to work by. The floor to be of beaten kunkur. The roof to be flat on kurries and planks. The doors and windows to be half panelled and half glazed for Post Office room, and batten for all other rooms. The height of the building to be 14 feet below the roof.

Government Lithc. Dept. Chepauk,
Madras, Decr. 1879.

5TH CLASS.

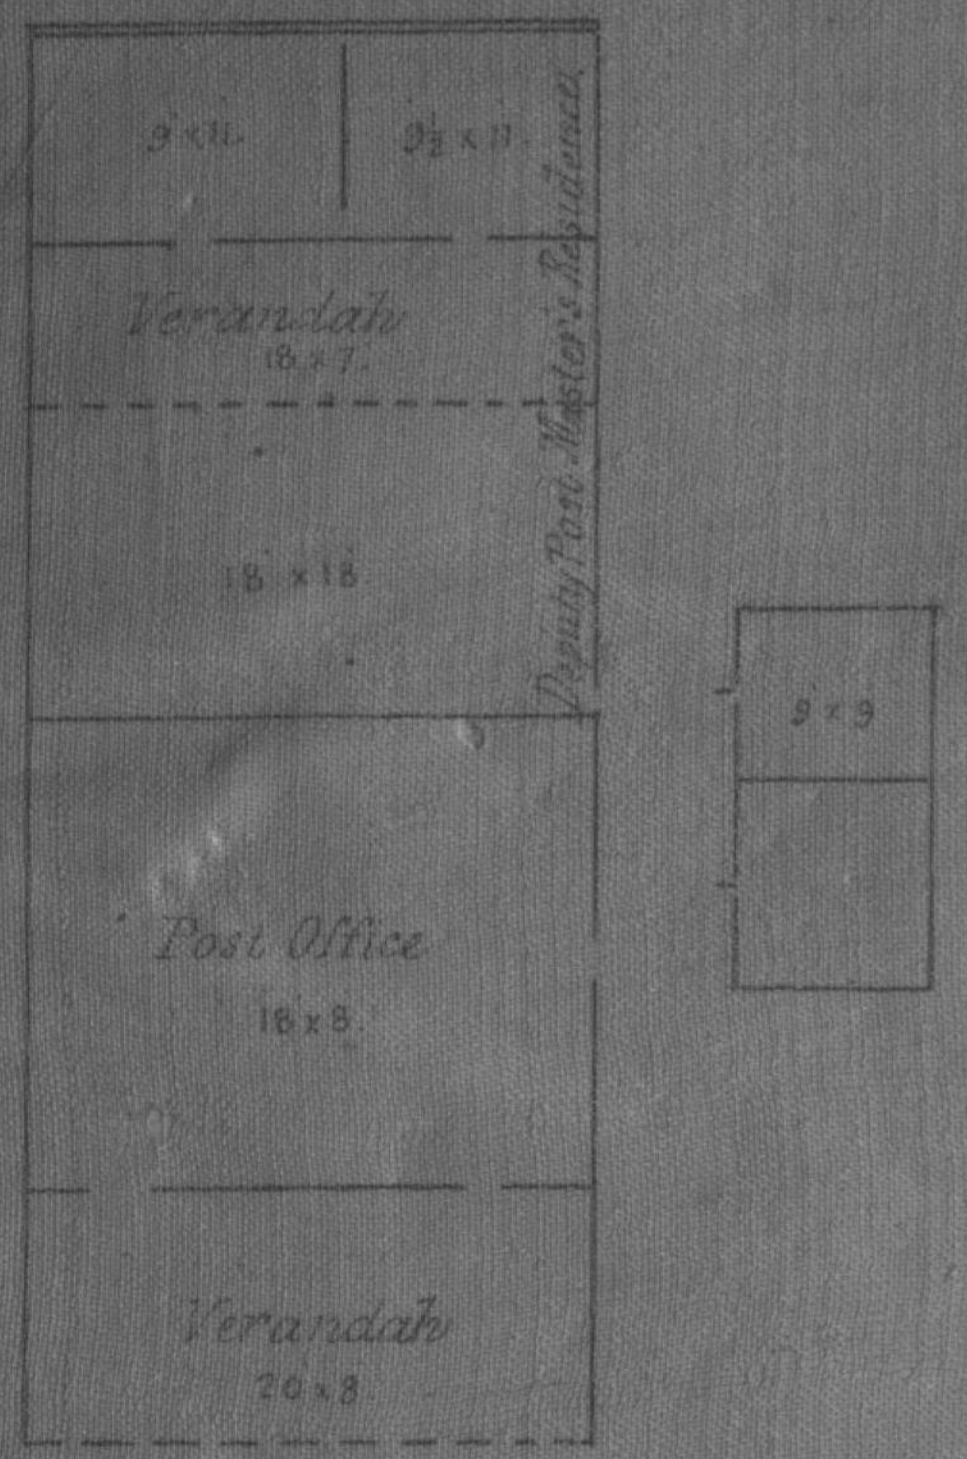

6TH CLASS.

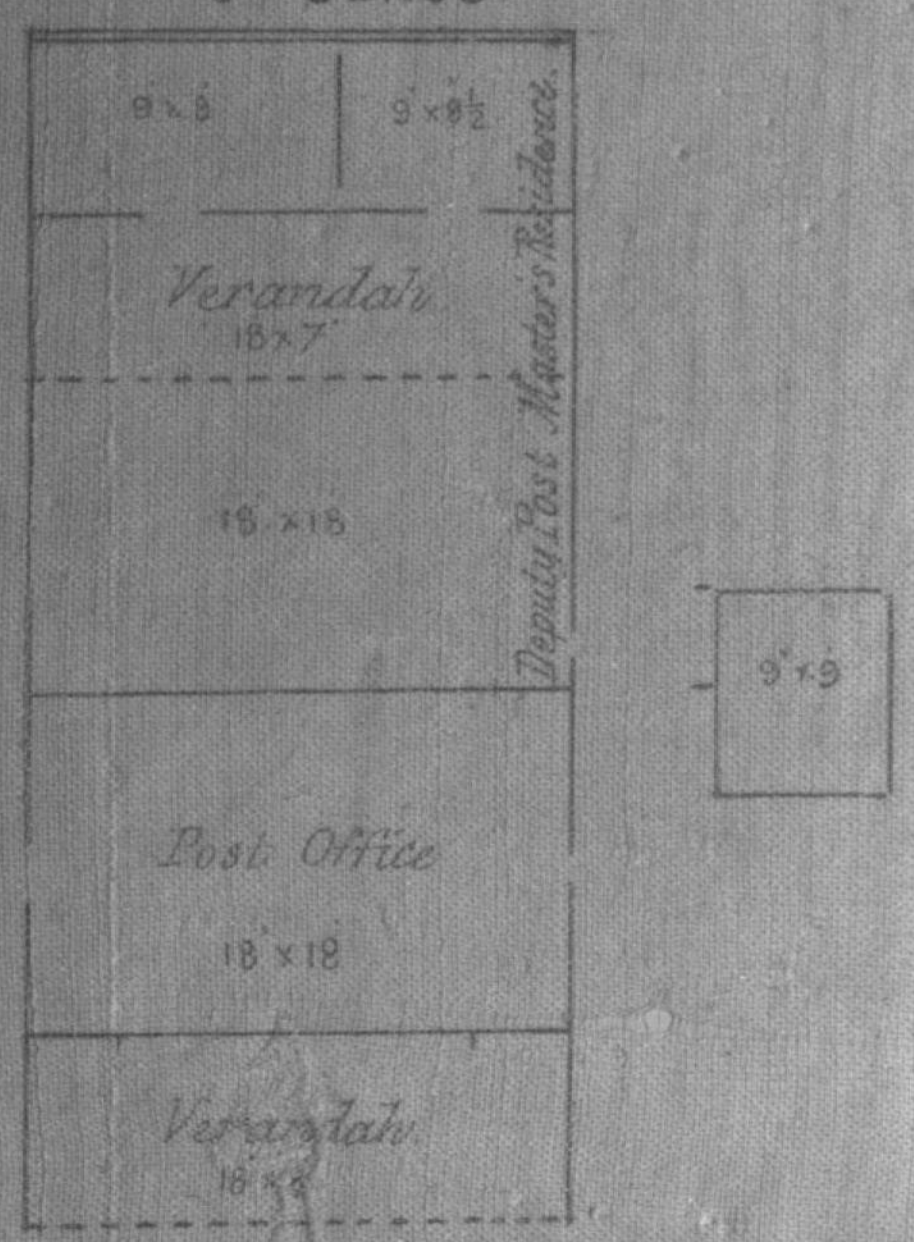

SPECIFICATION.

Foundation and plinth to be of burnt bricks set in mud; the superstructure to be mud or kutcha bricks, with the exception of door jambs and one foot at top, which will be of pucka work. The plaster to be kutcha and washed with chunnee muttee. The verandah to be thatched or tiled, and supported on posts or masonry pillars as most convenient. The floor of the Post Office and its verandah to be of beaten kunkur. The roof to be flat on kurries and planks. The doors and windows to be batten. The height of the building to be 12 feet below the roof.

(Signed) C. A. Orr Colonel R.E.
Secretary to Government D.P.W.

TRANSFER P. SINGARAVALOO & [illegible] GOVT. LITH. DEPT. CHEPAUK DECR. 1879.

No. 1122
23/26

POSTMASTER GENERAL'S OFFICE,
MADRAS, 27 April 1886.

FROM

M. Hammick Esquire C.S.
Offg. POSTMASTER GENERAL,
MADRAS,

TO

THE SECRETARY TO GOVERNMENT,
Public Works DEPARTMENT,
FORT ST. GEORGE.

SIR,

Referring to G.O. No. 3090 W dated 30th December 1885, in which a provision of Rs 4300 is made for a new Post Office building at Anantapur, I have the honor to forward herewith the plans and estimates together with copy of a letter No. 808 dated 14 April 1886, from the Director General of the Post Office sanctioning the work and to request that you will be so good as to move the Government to pass orders for the allotment of funds at their earliest convenience in view to the work being taken on hand and completed during the current year.

I

I have the honor to be,

Sir,

Your most obedient Servant,

W Dennison

Post Master General

&c.

w 27·4·86
3091 w 30·12·85

No. 329

(188) DEPARTMENT

[illegible] delivered to Sec Rev Bd. addressed Sec U/Sc PWD.

From

The Postmaster General, 1.5

MADRAS.

No. 1122/a 3/26

Dated 27 } April 1886.
Received 1/5 }

No.

SUBJECT.

Forwards Plan & Estimate for construction of a Post office building at Anantapur

O·7·6·86 R·11·5·86

1202W
1203W

Public Works Department, 1886-87.

(81)

Current No. 3297
Letter No. 1122/a 3/26
Dated the 27th April 1886
From the Post Master General

Note of Remarks.

1. The accompanying plan and estimate provide for constructing 3d Class Post office & Post Master's residence with out houses at Anantapur. The estimate amounts to Rs 4051 which is thus divided.

Post office & Post Masters' residence	Rs 2,699
Cook House	484
Privy	155
Compound wall	90
Out houses for peons and clerks	587
	4015
Scaffolding &c	36
Total Rupees	4051

Compensation for land (will be settled hereafter)

2. The building is to be constructed as per standard block plan, accompaniment to G.O. No 112 of the 14th January 1868.

3. The foundation of the main building

O·7·6·86 R·12·5·86

building is to be built of burnt stone in mortar and is to rest on a bed of concrete of broken metal in mortar. The basement & superstructure are to be built of Hammer dressed stone in Chunam.

4. The flooring of the main building is to be of Cuddapah slabs on 3" concrete & the flooring of the out houses is to be gravel, the depth of which is not mentioned in the estimate or specification.

5. The roof of the main building is to be terraced with bricks on edge 3" of small stone concrete + 3 courses of flat tiles and plastered over, and that of the Verandah is Bengal terrace. The roof of the out houses is to be mud consisting of bamboo mats + bamboos, & that of the Privy is to be of bamboo reepers & tiles.

6. The Beams are Moulmein teak, the joists, rafters & bressummers are of Venteak,

7. The scantlings of timbers are correct.

8. The rates are fair.

9. No report has been submitted.

10. The wooden shelves & Counter, the hanging rods & the letter box are to be made according to the plan (to be hereafter supplied) Please see end of specification

11. Plan and estimate have been countersigned by the Assistant Director General of Post offices in India.

To D.W.

Recommended for sanction

4/5/86

4.5.86

No. 1202 W.

Works

PUBLIC WORKS DEPARTMENT.

A a

PROCEEDINGS OF THE MADRAS GOVERNMENT.

12th May 1886

READ the following.

Letter from the Post Master General A.E. No. $\frac{1122}{A8/26}$ dated 27th April 1886.

The estimate amounting to Rs 4,051, for constructing a 3rd class post office and post master's residence ~~with outhouses~~ at Anantapur is sanctioned.

2. The ~~grant of~~ allotment Rs 4,300, ~~provided~~ for the work in the current year's Budget, will be reduced to the amount of the estimate, and the difference, Rs 249, will, with the approval of the Government of India, be added to the minor works grant for the year under "Postal."

3. This sanction has been registered as Imperi No. 3 W of 1886-87, and classified

ssified as Civil Buildings

iginal works.

Ordered that a copy

these proceedings be forwarded
the approval of
the Government of India
the transfer of funds proposed
H. E. No. 1203 W. of

Forwarded.

1/5/86

TO BE COMMUNICATED
TO NEWSPAPERS

To

D. 8/5

The Supg. Engr. III Circle with enclosures
Exam. P. W. Accts with duplicate abstract estimate
The Director - General of Post offices
" Post Master General [illegible]
Newspapers.

W/ O.P. 35/5
G. 7. 35-36 [illegible] 12/5/86

J.B.

3297

Govt. of 1886 Madras.

PUBLIC WORKS.

Dated 13/5/86

Recd [illegible]

Encl

G.O. 12th May 1886, No. 1202 W
1203 W

Post Office at
Anantapur

Estimate of Rs 4,051 for
constructing a 3rd class —
with Postmaster's residence
Sanctioned.

90/6

Post Office at
Anantapur

40/

Copy of Procs: Sanctioning
estimate for constructing a —
with Postmaster's residence
forwarded to the Govt of India
for approval of certain transfers
of grants [illegible]

[illegible] 8/3/95