(20)

(1) Number of pages 40

(2) Date of repair 23/12/87

(3) Initials of the Referencer Lno

TAMIL NADU ARCHIVES

GOVERNMENT OF TAMIL NADU

P.W DEPARTMENT

G.O. No. 3100(W) Press.
~~B.P. No.~~ ~~Mis.~~

Dated 23—11—1886 ~~198~~.

Not to be folded or roughly handled.

Archives —1 10,006-9 80

3100
1

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

Read—the following letter from H. T. ROSS, Esq., Registrar of the High Court of Judicature at Madras, to the Acting Chief Secretary to Government, dated Madras, 8th November 1886, No. 3019 :—

I have the honor to submit, for the sanction of Government, the accompanying plans and estimates and other papers for providing a road, compound-wall and latrine, costing in all Rs. 1,230, for the court of the district munsif of Ariyalúr, Trichinopoly district. A new building has but recently been erected for the court, but it is explained that the standard plan adopted did not provide for latrine and compound-wall, &c. The attention of the District Judge has been called to the necessity of submitting complete estimates for all that may be requisite whenever new buildings or improvements are proposed for the sanction of Government.

2. The grant for "petty constructions and repairs" has been allotted for other necessary works in the several districts and the present work cannot be carried out from the small balance now remaining at the Court's disposal.

No. 1914 C., Judicial.

Approved, and transferred to the Public Works Department.

(By Order.)

(Signed) H. A. STUART,
Under Secy. to Government.

18th November 1886.

Order—dated 23rd November 1886, No. 3100 W., Public Works.

The estimate, amounting to Rs. 1,230, for constructing a compound-wall and a latrine for the district munsif's court at Ariyalúr, in the Trichinopoly district, is sanctioned for execution when funds are available.

2. This sanction has been registered as Provincial, No. 141 W. of 1886-87, and classified as Civil Buildings, Original Works.

(True Extract.)

Captain, R.E.,
Under Secy. to Govt., P.W.D.

To the Superintending Engineer, VI Circle, with ~~four~~ enclosures.
" Examiner, Public Works Accounts, with the estimate for note and return to Superintending Engineer, VI Circle.
" Judicial Department.

Exd. E. Fernandez.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1886} Madras.

PUBLIC WORKS.

Dated November, 23rd.

Recd.

Encl.

G.O., 23rd Nov. 1886, No. 3100 W.

NOVEMBER.

District Munsif's Court at Ariyalur

Estimate of Rs. 1,230, for constructing a compound-wall and a latrine for the—, in the Trichinopoly district, sanctioned.

3100
2

6TH SEPTEMBER 1879, No. 2294 W., PUBLIC WORKS.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following letter from R. CHISHOLM, Esq., Consulting Architect to Government, to the Chief Engineer, Public Works Department, Buildings and Roads Branch, dated Chepauk, 30th July 1879, No. 226:—

I have the honor to forward, herewith, nine drawings, one specification, and estimate of the designs for Sub-Judge's and District Munsif's Court-houses.

G.O., No. 3929 W., dated 9th October 1878.

2. In elaborating the details I found it necessary to make minor alterations in the general plans.

3. I shall feel obliged if you will inform me whether the alternative plans for terraced roofed buildings, forwarded to you with my No. 281, dated the 10th of August last, are to be treated in a similar manner.

SPECIFICATION of Work to be performed in constructing a Court-house for a Sub-Judge or District Munsif according to standard design signed by the Consulting Architect, —— July 1879.

ORDINARY LABORER—*Excavating.*—Excavate the trenches to the full depths shown on the drawing or to such depths as the officer in charge of the work may direct.

Slips.—Clear away all slips which may occur during the progress of the work, and, if necessary, shore the sides in a manner to be approved by the officer in immediate charge of the work.

Baling.—In the event of wet foundations, bale the water from an excavation on the exterior of the site of the building. The officer in charge will fix the number of balers to be employed. They will be paid for extra at a daily rate to be agreed on with the petty contractor.

Filling in.—On receiving an order from the officer in charge in writing, fill in the sides of the completed masonry in layers of not greater thickness than 12 inches of material at a time Well water and ram with approved beaters each layer until the whole is brought up to the level of the ground.

Flooring foundation.—Fill in layers of 6 inches, earth or sand to within 4 inches of the floor level, immediately over this and under the floor, ram three inches of broken brick rubbish to form a foundation for the flooring.

Scaffolding.—Erect, maintain, and dismantle (under orders) all necessary scaffolding and centring. The scaffolding will consist of casuarina uprights cross-braced with pieces of palm tree and bamboos strongly bound together by coir rope.

Clearing away on completion.—On completion of the work, clear away all rubbish which may have accumulated during the progress of the work, and all implements, machinery, and materials used during its construction. Remove stains of white-wash or lime from wood-work. Oil and render efficient all door furniture and fastenings, and other moveable fixtures, and deliver the works up in a sound, neat, and workman-like condition.

Stone mason.—Provide and lay on even beds No. 30 stones under the posts of verandahs with clean wrought mortice holes for the posts.

Provide and lay on even beds No. 18 stones under beams. Dress all bed stones two lines generally. Where stone can be dressed and put in the work at reasonable rates, provide and lay a stone curbing to the verandah and along the top of the plinth; also protects angles of the building by quoins and upstarts as shown on the elevation. The capping to the plinth will be splayed.

Provide and lay steps 6 inches thick as shown on the plan. Each stone to be tailed in not less than 3 inches.

Iron-monger.—Provide and fix in the lower openings of the record room No. 2 sets of iron barred gratings, and fix the same into the wooden frame with unreversible screws.

Provide and fix No. 6 sets of iron barred gratings for the property room.

Provide and supply to carpenters all necessary straps, bolts, nails, screws, and whatever other iron work may be necessary for the due and substantial completion of the building.

Provide all requisite door furniture in (specify whether of brass or iron).

BRICKLAYER—*Concrete.*—After the trenches have been opened to the full depths determined by the officer in charge of the work, well water and ram the bottom to receive the concrete. Lay and ram in two layers 12 inches of concrete, composed as follows:—Two parts broken brick (broken to pass through a one and-a-half inch ring), one part gravel, one part sharp river sand, and one part lime.

Footing courses.—Carry up the foundations according to the detailed drawing.

Superstructure.—Build the walls one and-a-half brick thick, splay all angles of doors and windows, leave openings for doors and windows of the sizes and dimensions shown on the drawings, fix all nogs and other minor fastenings for the after reception of the door-frames, &c.

Lay bricks in English bond, alternate courses of headers and stretchers, using king or queen closers only where necessary. Keep courses truly level worked to three-eighth inch mortar joints, horizontal and vertical.

Segmental arches.—Build segmental arches over all openings of rubbed bricks breaking bond, and 12 inches deep on face at crown set flush with face of wall. On the exterior of all arches lay a one and half inch tile projecting two inches as a weather course.

Defects to be made good.—After the roofing and fixtures are completed, make good all defects to the masonry caused by the execution of other works. Plug all putlog holes and remove any bad face bricks marked by the officer in charge of the work, and re-insert sound bricks in their places.

Pointing.—Rake out the exterior joints of all masonry work to the depth of half an inch; well wash the surface and point with flush pointing. The mortar should be toned to harmonize with the color of the brick by the addition of red ochre.

Plasterer.—Plaster the whole of the interior with two coats of plaster. In the record tower, lath and plaster under the joists to form a ceiling for the protection of the wood-work in case of fire. It would be advisable to tint the final coat. The following will be found pleasing. Around the openings on the cornice, &c., toned white composed of:—

60 parts chunam,
¼ yellow ochre,

and on all blank surfaces either toned buff or grey, the former composed of—

10 parts chunam,
1 part yellow ochre,


and the latter of—


50 parts chunam,
1 part yellow ochre,
¼ „ black.

Roofer.—Over one course of flat tiles lay a roof of well-burnt pan tiles protected in the usual way by chunam bands.


Lay zinc or lead valleys.

Where the roof abuts on walls lead flashing should be fastened into the courses in the usual way. The pieces of lead or zinc should be cut in convenient sizes not larger than—





These should be bent up on the lines of the dots. The joints should be raked out to the full depth of one inch and the flashing inserted. Each sheet should lap two inches. When finished the flashing should present this appearance.

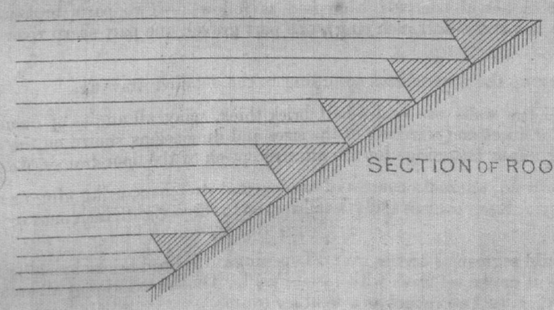

Flooring.—After the surface has been brought up to the proper level, lay a course of well burnt six inch square tiles.

Terracing.—Terrace the side verandahs with one course tiles on edge, one course flat tiles over six inches of jelly rammed to four inches plastered on the top. Terrace the floors of the record tower with one course tiles on edge, two courses flat tiles over nine inches of jelly beaten to six inches.

Carpenter.—Frame all the trusses in a sound workman-like manner, and let each truss be weighted to double the permanent strain by loading with pig iron before being placed in position.

Provide frame and fix all the necessary doors, windows, verandah posts, and external carved work in sound, well seasoned timber free from defects.

Provide frame and fit up the necessary benches and drawers in the lost property-room.

Painter.—Paint all doors and windows and exposed wood-work with three coats of Carson's oak color, and the wood-work of the roof with three coats of wood-oil.

Workmanship and materials.—The wood will be teak well seasoned and free from knots or other defects, clean wrought and finished with European tools. All mortices, mitres and joints of every description will be carefully cut and executed in a clean and workman-like manner.

The iron will be that known as Sweedish, clean wrought and welded hot with an approved lap. All bolts will be provided with washes twice the diameter of the nut or head.

The concrete will be composed of one part broken brick, one part sand, one part gravel, and one part lime well mixed and thrown in a semi-fluid state. The bricks will be table-moulded cast from moulds——inches by——inches by—— inches in size, five per cent. of bats will be allowed. The mortar will be composed of one part shell lime and two parts river sand well pounded and mixed fresh before using.

(Signed) R. CHISHOLM,
Consulting Architect to Government.

Clearing away on completion.—On completion of the work, clear away all rubbish which may have accumulated during the progress of the work, and all implements, machinery, and materials used during its construction. Remove stains of white-wash or lime from wood-work. Oil and render efficient all door furniture and fastenings, and other moveable fixtures, and deliver the works up in a sound, neat, and workman-like condition.

Stone mason.—Provide and lay on even beds No. 30 stones under the posts of verandahs with clean wrought mortice holes for the posts.

Provide and lay on even beds No. 18 stones under beams. Dress all bed stones two lines generally. Where stone can be dressed and put in the work at reasonable rates, provide and lay a stone curbing to the verandah and along the top of the plinth; also protects angles of the building by quoins and upstarts as shown on the elevation. The capping to the plinth will be splayed.

Provide and lay steps 6 inches thick as shown on the plan. Each stone to be tailed in not less than 3 inches.

Iron-monger.—Provide and fix in the lower openings of the record room No. 2 sets of iron barred gratings, and fix the same into the wooden frame with unreversible screws.

Provide and fix No. 6 sets of iron barred gratings for the property room.

Provide and supply to carpenters all necessary straps, bolts, nails, screws, and whatever other iron work may be necessary for the due and substantial completion of the building.

Provide all requisite door furniture in (specify whether of brass or iron).

BRICKLAYER—*Concrete.*—After the trenches have been opened to the full depths determined by the officer in charge of the work, well water and ram the bottom to receive the concrete. Lay and ram in two layers 12 inches of concrete, composed as follows:—Two parts broken brick (broken to pass through a one and-a-half inch ring), one part gravel, one part sharp river sand, and one part lime.

Footing courses.—Carry up the foundations according to the detailed drawing.

Superstructure.—Build the walls one and-a-half brick thick, splay all angles of doors and windows, leave openings for doors and windows of the sizes and dimensions shown on the drawings, fix all nogs and other minor fastenings for the after reception of the door-frames, &c.

Lay bricks in English bond, alternate courses of headers and stretchers, using king or queen closers only where necessary. Keep courses truly level worked to three-eighth inch mortar joints, horizontal and vertical.

Segmental arches.—Build segmental arches over all openings of rubbed bricks breaking bond, and 12 inches deep on face at crown set flush with face of wall. On the exterior of all arches lay a one and half inch tile projecting two inches as a weather course.

Defects to be made good.—After the roofing and fixtures are completed, make good all defects to the masonry caused by the execution of other works. Plug all putlog holes and remove any bad face bricks marked by the officer in charge of the work, and re-insert sound bricks in their places.

Pointing.—Rake out the exterior joints of all masonry work to the depth of half an inch; well wash the surface and point with flush pointing. The mortar should be toned to harmonize with the color of the brick by the addition of red ochre.

Plasterer.—Plaster the whole of the interior with two coats of plaster. In the record tower, lath and plaster under the joists to form a ceiling for the protection of the wood-work in case of fire. It would be advisable to tint the final coat. The following will be found pleasing. Around the openings on the cornice, &c., toned white composed of:—

60 parts chunam,
½ yellow ochre,

and on all blank surfaces either toned buff or grey, the former composed of—

10 parts chunam,
1 part yellow ochre,


and the latter of—


50 parts chunam,
1 part yellow ochre,
¼ „ black.

Roofer.—Over one course of flat tiles lay a roof of well-burnt pan tiles protected in the usual way by chunam bands.


Lay zinc or lead valleys.

Where the roof abuts on walls lead flashing should be fastened into the courses in the usual way. The pieces of lead or zinc should be cut in convenient sizes not larger than—



These should be bent up  on the lines of the dots. The joints should be

raked out to the full depth of one inch and the flashing inserted. Each sheet should lap two inches. When finished the flashing should present this appearance.

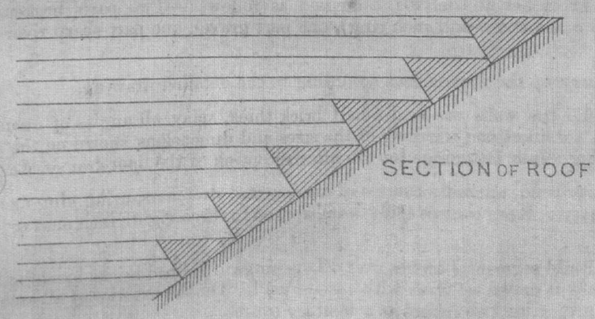

Flooring.—After the surface has been brought up to the proper level, lay a course of well burnt six inch square tiles.

Terracing.—Terrace the side verandahs with one course tiles on edge, one course flat tiles over six inches of jelly rammed to four inches plastered on the top. Terrace the floors of the record tower with one course tiles on edge, two courses flat tiles over nine inches of jelly beaten to six inches.

Carpenter.—Frame all the trusses in a sound workman-like manner, and let each truss be weighted to double the permanent strain by loading with pig iron before being placed in position.

Provide frame and fix all the necessary doors, windows, verandah posts, and external carved work in sound, well seasoned timber free from defects.

Provide frame and fit up the necessary benches and drawers in the lost property-room.

Painter.—Paint all doors and windows and exposed wood-work with three coats of Carson's oak color, and the wood-work of the roof with three coats of wood-oil.

Workmanship and materials.—The wood will be teak well seasoned and free from knots or other defects clean wrought and finished with European tools. All mortices, mitres and joints of every description will be carefully cut and executed in a clean and workman-like manner.

The iron will be that known as Sweedish, clean wrought and welded hot with an approved lap. All bolts will be provided with washes twice the diameter of the nut or head.

The concrete will be composed of one part broken brick, one part sand, one part gravel, and one part lime well mixed and thrown in a semi-fluid state. The bricks will be table-moulded cast from moulds——inches by——inches by——inches in size, five per cent. of bats will be allowed. The mortar will be composed of one part shell lime and two parts river sand well pounded and mixed fresh before using.

(Signed) R. CHISHOLM,
Consulting Architect to Government.

ESTIMATE for constructing a Court-house for a Sub-Judge or District Munsif.

Detailed Quantities.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
Excavation for Foundations.						
Court walls		FT. IN.	FT. IN.	FT. IN.		
Record-tower walls		130 0	4 6	4 6	3,655	
Spiral		50 6	4 6	4 6		
Gumastah's and head clerk's rooms and passage front, rear, and end walls		11 0	11 0	4 6	545	
Do. do. partitions		132 6	4 3	4 6		
Retiring-room, front, rear, and end walls	2	15 0	4 3	4 6	5,192	
Property-room, rear and end walls		53 6	4 3	4 6		
Verandah walls		55 6	4 3	4 6		
Steps		197 5	3 10	4 6	3,405	
Do.	2	16 0	4 0	2 0	416	
	2	10 0	4 0	2 0		
Cubic feet					13,213	
Cubic yards						490
Concrete 12 inches thick.						
Excavation cubic ft. 12,797 ÷ 9 × 2 =					2,844	
Steps	2	16 0	4 0	0 6	104	
Do.	2	10 0	4 0	0 6		
Cubic feet					2,948	
Brickwork in Foundations.						
Footings.						
Court walls		130 0	2 6	1 6	684	
Record-tower		52 6	2 6	1 6		
Spiral		9 0	9 0	1 6	122	
Gumastah's and head clerk's rooms and passage, front, rear, and end walls		134 6	2 3	1 6		
Partitions	2	17 0	2 3	1 6	950	
Retiring-room, front, rear, and end walls		55 6	2 3	1 6		
Property-room, rear and end walls		57 6	2 3	1 6		
Verandah walls		205 10	1 10	1 6	566	
Above footings to ground level—		130 0	1 6	2 0	551	
Court walls		53 6	1 6	2 0		
Record-tower		8 0	8 0	2 0	128	
Spiral		135 6	1 3	2 0		
Gumastah's and head clerk's rooms and passage, front, rear, and end walls	2	18 0	1 2	2 0	716	
Partitions		56 6	1 3	2 0		
Retiring-room, front, rear, and end walls		58 6	1 3	2 0		
Property-room, rear and end walls		141 9	0 3	2 0	71	
Extra thickness for plinth		208 10	0 10	2 0	348	
Verandah walls	2	16 0	4 0	1 6	312	
Steps	2	10 0	4 0	1 6		
Do.					4,448	
Cubic feet						
Brickwork in Basement.						
Court walls		130 0	1 6	2 0	551	
Record-tower		53 6	1 6	2 0		
Spiral		8 0	8 0	2 0	123	
Gumastah's and head clerk's rooms and passage, front, rear, and end walls		135 6	1 3	2 0		
Do. do. partitions	2	18 0	1 3	2 0	570	
Retiring-room, front, rear, and end walls		56 6	1 3	2 0		
Property-room, rear and end walls		58 6	1 3	1 0	73	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
Brickwork in Basement—cont.		FT. IN.	FT. IN.	FT. IN.		
Extra thickness for plinth		99 3	0 3	2 0	50	
Do. do.		42 6	0 3	1 0	11	
Verandah walls		208 10	0 10	2 0	348	
Steps	2	16 0	4 0	0 6	64	
Do.	2	14 0	3 0	0 6	42	
Do.	2	12 0	2 0	0 6	24	
Do.	2	10 0	1 0	0 6	10	
Do.	2	10 0	4 0	0 6	40	
Do.	2	8 0	3 0	0 6	24	
Do.	2	6 0	2 0	0 6	12	
Do.	2	4 0	1 0	0 6	4	
						1,951
Deductions—						
Stone under posts and trusses as per details					34	
Stone in steps and capping to plinth.					248	
						282
Cubic feet						1,669
Brickwork in Superstructure.						
Court walls		130 0	1 6	20 0	3,900	
Do. gables	2	23 6	1 6	3 11	276	
Record-tower walls		53 6	1 6	32 6	2,608	
Do. gables	2	15 0	1 6	2 6	113	
Spiral octogonal		53 0	Area	36 6	1,935	
Do. upper portion		40 7	Area	5 0	203	
Gumastah's and head clerk's rooms and passage, front, rear, and end walls		135 6	1 3	14 0	2,371	
Do. do. partitions	2	18 0	1 3	14 0	630	
Do. gables	3	19 3	1 3	3 2½	232	
Retiring-room, front, rear, and end walls		56 6	1 3	14 0	989	
Do. gables	1	19 3	1 3	3 2½	77	
Property-room, rear and end walls		58 6	1 3	10 0	731	
Do. gable	1	15 3	1 3	2 6½	48	
Do. step	1	4 0	1 0	0 6	2	
						14,115
Deductions—						
Doors in court-room	10	4 0	1 6	8 0	480	
Head clerk, gumastah's room, &c., doors	11	4 0	1 3	8 0	440	
Archways in passage	2	7 0	1 3	8 0	140	
Record-tower door	1	2 9	1 6	6 6	27	
Spiral doors	3	2 0	1 0	5 6	33	
Do. semi-circular portion	1½	3 1	Area	1 0	5	
Windows for head clerk's and retiring-room	4	2 0	1 3	6 6	65	
Do. for record-tower	4	3 0	1 6	4 0	72	
Do. upper do.	4	1 6	1 6	3 6	32	
Do. do. semi-circular portion	2	1 9	Area	1 6	5	
Do. for property-room	6	2 0	1 3	5 0	75	
Court upper lights	14	2 0	1 6	5 0	210	
Gumastahs' and clerks' room do.	8	5 0	1 3	2 1½	106	
Spiral void, six feet diar.		28 3	Area	36 6	1,031	
Do. upper portion		15 10	Area	5 0	79	
Segmental archwork as per details					236	
Semi-circular do. do.					63	
						3,099
Cubic feet						11,016

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Stone under Posts and Trusses.						
Under posts	30	1 0	1 0	0 5	13	
Under trusses	6	2 0	1 6	0 5	8	
Do.	12	2 0	1 3	0 5	13	
Cubic feet ...	...	...	...	...	34	
Stonework (if easily procurable)—						
Steps	2	65 6	1 3	0 6		
Do.	2	41 6	1 3	0 6	136	
Do.	1	4 0	1 3	0 6		
Capping to plinth	...	322 0	0 10	0 5	112	
Cubic feet ...	...	...	...	...	248	
N.B.—Stone quoins not included.						
Segmental Archwork.						
Over court doors	10	5 0	1 6	1 0	75	
Head clerk, gumastah's room, &c., do.	11	5 0	1 3	1 0	69	
Archways in passage	2	9 0	1 3	1 0	23	
Record-tower door	1	3 9	1 6	1 0	6	
Over windows for head clerk's and retiring-room	4	3 0	1 3	1 0	15	
Do. record-tower	4	4 0	0 10	1 0	13	
Do. property-room	2	3 0	1 3	1 0	8	
Court upper lights	6	3 0	1 6	1 0	27	
Cubic feet ...	...	...	...	...	236	
Semi-circular Archwork.						
Spiral doors	3	4 9	1 0	1 0	14	
Record-tower, upper windows	4	4 0	0 10	1 0	13	
Do. above do. front	1	14 3	1 6	1 0	21	
Do. do. side	1	10 0	1 6	1 0	15	
Cubic feet ...	...	...	...	...	63	
Earthfilling in Basement.						
Court	1	40 0	22 0	1 6	1,320	
Head clerk, gumastah's room, &c. ...	...	73 0	18 0	1 6	1,971	
Tower	1	13 6	13 6	1 6	273	
Property-room	1	21 0	14 0	0 6	147	
Verandahs	...	121 4	8 2	1 6	1,486	
Do.	...	86 1	7 2	1 6	925	
Cubic feet ...	...	...	...	...	6,122	
Cubic yards ...	...	...	...	...	...	227
Teak-wood.						
Court—						
Three trusses 22 feet span. Tie beams ...	3	25 0	0 6	0 8	25	
Three trusses 22 feet span. Principal rafters.	6	14 6	0 5	0 6	18	
Three trusses 22 feet span. Struts	6	7 0	0 4	0 5	6	
Purlins	2	47 0	0 6	0 7	27	
Purlins over wall	2	47 0	0 4	0 4	10	
Ridge	1	47 0	0 3	0 8	8	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Teak-wood—cont.						
Common rafters	64	16 10½	0 3	0 4	90	
Barge boards	4	17 6	0 2	0 9	10	
Do.	4	2 0	0 2	0 9		
Do.	2	13 6	0 2	0 7	3	
Do.	4	5 3	0 2	1 6	5	
Do. carved pieces	4	2 6	0 1	1 9	1	
Finial	2	7 0	0 4	0 4	2	
Do. upper portion	2	1 3	1 0	1 0	3	
Do. do.	2	1 10½	0 6	0 6	1	
Do. lower ball	2	1 1½	0 8	0 8	1	
Eaves boarding	2	47 0	0 ¾	0 5	2	
Head clerk, gumastah's, &c., rooms—						
Four trusses 18 feet span. Tie beam	4	20 6	0 4	0 6	14	
Four trusses 18 feet span. Principal rafters ...	8	11 9	0 4	0 5	13	
Four trusses 18 feet span. Struts	8	5 6	0 4	0 4	5	
Purlins	2	84 0	0 5	0 6	35	
Do. over wall	2	84 0	0 4	0 4	19	
Ridge	1	84 0	0 3	0 8	14	
Common rafters	114	14 0	0 3	0 4	133	
Barge boards	4	14 6	0 2	0 9	8	
Do.	4	2 0	0 2	0 9		
Do.	2	10 9	0 2	0 6	2	
Do.	4	4 0	0 2	1 3	3	
Do.	4	1 3	0 2	0 3	1	
Do.	4	0 10½	0 2	0 3		
Finials	2	6 0	0 3½	0 3½	1	
Do. upper portion	2	2 3	0 10½	0 10½	3	
Do. lower do.	2	2 0	0 10	0 10	3	
Eaves boarding	2	81 0	0 ¾	0 5	4	
Property-room—						
Two trusses 14 feet span. Tie beams ...	2	16 6	0 4	0 5	5	
Two trusses 14 feet span. Principal rafters.	4	9 3	0 4	0 4	4	
Two trusses 14 feet span. Struts	4	4 6	0 3	0 4	2	
Purlins	2	25 0	0 4	0 5	7	
Do. over wall	2	25 0	0 4	0 4	6	
Ridge	1	25 0	0 3	0 7	4	
Common rafters	34	11 8	0 3	0 3	25	
Barge boards	2	12 0	0 2	0 8	3	
Do.	4	0 4	0 2	0 8		
Do.	1	8 0	0 2	0 4	1	
Do.	2	2 0	0 2	0 7½	1	
Do.	1	2 6	0 2	0 3	1	
Eaves boarding	...	28 0	0 ¾	0 4	1	
Record-tower—						
Joists ... ... 2 ×	10	15 6	0 4	0 7	60	
Rafters	28	11 6	0 3	0 5	41	
Collar pieces	10	7 6	0 3	0 5		
Ridge	1	19 6	0 3	0 7	3	
Wall plates	2	19 6	0 3	0 3	2	
Barge boards	4	12 3	0 2	0 7	5	
Do.	4	1 2	0 2	0 7		
Do.	4	4 0	0 2	2 1½	6	
Finials	2	4 0	0 4	0 4	1	
Do. upper portion	2	3 1½	0 9	0 9	4	
Do. lower do.	2	1 1½	0 7½	0 7½	1	
Eaves boards	2	19 6	0 ¾	0 5	1	
Verandahs—						
Posts	4	10 3	0 5	0 5	44	
Do.	14	7 10	0 5	0 5		
Do.	12	8 6	0 5	0 5		

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Teak-wood—cont.						
Verandahs—*cont.*						
Bases to posts	30	0 7	0 7	0 6	5	
Breastsummers	...	206 0	0 5	0 5	36	
Struts	47	2 9	0 3½	0 3½	11	
Cleats	51	0 9	0 3	0 3½	3	
Knobs	51	0 5	0 5	0 10	7	
Plank ... ... ½ ×	47	2 0	1 6	0 1	6	
Rafters	47	11 3	0 3	0 4	91	
Small rafters	88	6 5	0 3	0 4		
		Average length.				
Hip rafters	8	14 0	0 4	0 5	16	
Ridge over entrances	2	11 0	0 3	0 5	2	
Wall plates	...	96 0	0 3½	0 5		
Pieces to secure rafters to breastsummers	132	1 3	0 3	0 1½	5	
Do. do. uprights ...	66	0 10	0 3	0 3	3	
Joists	62	9 6	0 3	0 4	53	
Do.	7	6 0	0 3	0 4		
Eaves boarding for joists	2	32 0	0 2	0 4	4	
Do. for rafters	...	107 0	0 3	0 5	3	
Barge board for entrances	4	10 0	0 1½	0 7	3	
Do.	2	4 0	0 2	2 0	3	
Do. collar pieces	2	8 6	0 3	0 4	1	
Do. strut	4	6 0	0 3	1 6	9	
Turret—						
Cill	8	2 6	0 11	1 0	18	
Uprights	8	0 8	0 9	4 6	18	
Breastsummers	8	2 3	0 8	0 6	6	
Do. above	8	3 3	1 6	1 0	39	
Brackets	16	0 8	0 6	0 9	4	
Venetians	40	1 3	0 1	1 6	6	
Do.	32	0 4	0 ¾	1 3	1	
Bay windows—						
Brackets	8	3 0	0 3	0 7	4	
Knobs	8	0 7½	0 4	0 4	1	
Joists	8	3 0	0 3	0 3	4	
Longitudinal pieces	4	8 0	0 3	0 3		
Uprights	8	0 3	0 3	7 3	6	
Do.	4	0 3	0 3	8 9		
Breastsummers	4	3 0	0 3	0 3		
Do.	2	8 0	0 3	0 3	3	
Do.	4	2 0	0 3	0 3		
Do.	2	8 0	0 3	0 3		
Brackets	20	0 6	0 3	1 3	3	
Rail	2	8 0	0 3	0 3	2	
Do.	8	2 0	0 3	0 3		
Battens for panel	...	100 0	0 1	0 2	1	
Frame	4	4 0	0 1½	0 2½	2	
Do.	12	1 6	0 1½	0 2½		
Do.	20	1 10½	0 1½	0 2½		
Rafters	6	4 0	0 2	0 2	1	
Hip rafters	4	5 0	0 2	0 2½	1	
Small rafters	8	2 6	0 2	0 2	1	
Planking floor	2	8 0	2 0	0 1	3	
Do. for roof	28	10 6	0 ½	0 6	6	
Roll cap	4	4 6	0 2	0 2½	1	
Cubic feet ...	...	...	...	...	1,103	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Venetian and Panel Doors with Frames.	21	4 0	...	8 0	672	sq. ft.
Batten Door to Record-room with Frames.	1	2 9	...	6 6	18	sq. ft.
Venetian Windows with Frames.						
Head clerk's and retiring rooms ...	4	2 0	...	6 6	52	sq. ft.
Windows with Iron Bars and Glazed Shutters including Frames.						
Record-room lower windows	2	3 0	...	4 0	24	
Property-room windows	6	2 0	...	5 0	60	
					84	sq. ft.
Windows with Frames and Glazed Shutters.						
Record-room, upper windows	2	3 0	...	4 0	24	
Do. do.	4	1 6	...	4 3	26	
					50	sq. ft.
Upper Lights with Glazed Shutters and Frames.						
Court	14	2 0	...	5 0	140	
Head clerk, gumastah's room, &c. ...	8	5 0	...	2 1½	85	
					225	sq. ft.
Wrought-iron Work in Trusses, &c.						
1½″ diameter king rods for 22 ft. trusses.	3	9 9	29 3	×4·09	119·63	
1½″ hex. nuts and bolt heads for do.	9	...	...	×2·14	19·26	
¾″ hex. nuts and bolt heads for do.	9	...	...	×0·32	2·88	
3″ × 3″ × ⅛″ washers for do.	6	3 0	18 0	×1·87	33·66	
1¼″ × ⅝″ straps for do.	6	0 7¾	3 10½	×2·50	9·68	
1⅛″ × ⅛″ bearing plates do.	12	...	...	× ·267	32·04	
⅝″ hex. nuts for do.	4	8 0	32 0	×2·62	83·84	
1″ diar. king rods for 18 feet do.	12	...	...	×1·10	13·20	
1″ hex. nuts and bolt heads for do.	12	...	...	×0·32	3·84	
3″ × 3″ × ⅛ washers for do.	8	2 7	20 8	×1·87	38·64	
1¼″ × ⅝″ straps for do.	8	0 6¾	4 6	×2·50	11·25	
1⅛″ × ⅛″ bearing plates for do.	16	...	...	× ·267	4·27	
⅞″ hex. nuts for do.	2	6 3	12 6	×2·01	25·12	
⅞″ diar. king rods for 14 feet do.	6	...	...	× ·73	4·38	
⅞″ hex. nuts and bolt heads for do.	6	...	...	×0·32	1·92	
3″ × 3″ × ⅛″ washers for do.	4	2 3	9 0	×1·87	16·83	
1¼″ × ⅝″ straps for do.	4	0 6¾	2 3	×2·50	5·62	
1⅛″ × ⅛″ bearing plates for do.	8	...	...	× ·267	2·13	
⅝″ hex. nuts for do.	22	2 0	44 0	×1·47	64·68	
⅝″ bolts for verandah wall plates ...	44	...	...	× ·43	18·92	
¾″ hex. nuts and bolt heads for do. ...	4	1 6	6 0	×2·62	15·72	
1″ bolts for securing bay window uprights to wall.	16	...	...	×1·10	17·60	
1″ hex. nuts and bolt heads for do.	132	0 6	66 0	× ·164	10·82	
¼″ bolts to secure verandah rafters to breastsummers.	264	...	...	× ·017	4·48	
¼″ hex. nut and bolt head						
lb. ...	...	...	...	...	560·41	
Say, lb. ...	...	...	...	...	...	561

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Flooring with Square Pavement Tiles.						
Court	...	40 0	...	22 0	880	
Head clerk's, gumastah's room, &c.	...	73 0	...	18 0	1,314	
Property-room	...	21 0	...	14 0	294	
Record do.	...	13 6	...	13 6	182	
Verandahs	...	101 6	...	9 0	914	
Do.	...	29 6	...	8 9	258	
Do.	...	78 9	...	8 0	630	
Door pieces	10	4 0	...	1 6	60	
Do.	11	4 0	...	1 3	55	
Do.	1	2 9	...	1 6	4	
Do.	1	2 0	...	1 0	2	
Archway	2	7 0	...	1 3	18	
						4,611
Deduct spiral	...	53 0	Area ...	...	...	53
Square feet	...	...	...	...	...	4,558
Squares	...	...	...	...	...	45·58
Tiling with Flat and Pan Tiles including Reepers, Nails and Chunam Bands complete.						
Court	...	46 6	...	34 6	1,604	
Head clerk's, gumastah's room, &c.	...	81 0	...	29 0	2,349	
Property-room	...	23 9	...	24 0	570	
Record-tower	...	19 6	...	24 0	468	
Verandahs	...	123 3	...	11 6	1,417	
Square feet	...	...	...	...	6,408	
Squares	...	...	...	...	...	64
Terracing.						
Verandahs	...	89 6	...	9 0	806	
Record-tower	2	14 0	...	14 0	392	
Square feet	...	...	...	...	1,198	
Squares	...	...	...	...	...	12
Terracing Roof of Turret	...	12 0	...	9 6	114	sq. ft.
Squares	...	...	...	...	...	1·14
Plastering Interior.						
Court	...	124 0	...	20 0	2,480	
Do. gables	2	23 6	...	3 11	184	
Head clerk's, gumastah's room, &c.	...	290 0	...	14 0	4,060	
Do. do. gables	8	19 3	...	3 2½	494	
Property-room	...	70 0	...	10 0	700	
Do. gables	2	15 3	...	2 6½	78	
Record-tower	...	54 0	...	31 0	1,674	
Gables	...	15 0	...	2 6	75	
Spiral	2	18 10	...	41 6	782	
Door jambs	...	20 0	...	1 6	300	
Do.	10	20 0	...	1 3	275	
Do.	11	15 9	...	1 6	24	
Do.	1	14 0	...	1 0	42	
Window jambs	3	17 0	...	1 3	85	
Do.	4	14 0	...	1 6	42	
	2					

3600/9

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Plastering Interior—cont.						
Window jambs	2	14 0	...	0 10	23	
Do.	4	11 0	...	0 10	37	
Do.	4	12 0	...	1 3	60	
Do.	2	14 0	...	1 3	35	
Do.	6	14 0	...	1 6	126	
Upper lights jambs	8	12 0	...	1 6	144	
Do. do.	8	9 3	...	1 3	153	
Do. do.	2	24 0	...	1 3		
Archways do.						11,873
Deductions—						
Doors	26	4 0	...	8 0	832	
Do.	1	2 9	...	6 6	18	
Do.	6	2 0	...	5 6	66	
Do.	3	3 1	Area ...	...	9	
Do.	4	2 0	...	6 6	52	
Windows	4	3 0	...	4 0	48	
Do.	4	1 6	...	3 6	21	
Do.	2	1 9	Area ...	...	4	
Do.	6	2 0	...	5 0	60	
Do.	14	2 0	...	5 0	140	
Upper lights	8	5 0	...	2 1½	85	
Do.	2	7 0	...	8 0	112	
Archways in passage						1,447
Square feet	...	...	...	...	...	10,426
Squares	...	...	...	...	...	104·26
Pointing Exterior.						
Court	...	95 0	...	20 0	1,900	
Do. sides of end gables	4	7 0	...	2 6	70	
Gables	2	25 0	...	4 2	208	
Head clerk's, gumastah's room, &c.	...	180 6	...	14 0	2,527	
Do. gables	2	20 6	...	3 5	140	
Do. sides of gable	2	6 0	...	3 0	36	
Property-room	1	61 0	...	10 0	610	
Gable	1	16 6	...	2 9	45	
Record-tower	...	58 0	...	32 0	1,856	
Do. gable	2	16 6	...	2 9	91	
Turret	...	19 10	...	35 0	694	
Do. upper portion	...	26 6	...	2 0	53	
Do. do.	...	24 0	...	4 6	108	
Basement all round	...	308 0	...	2 0	616	
Do. for property-room	...	43 0	...	1 0	43	
						8,997
Deductions—						
Doors	16	4 0	...	8 0	512	
Do.	1	2 9	...	6 6	18	
Windows	4	2 0	...	6 6	52	
Do.	4	3 0	...	4 0	48	
Do.	4	1 6	...	3 6	21	
Do.	2	1 9	Area ...	...	4	
Do.	6	2 0	...	5 0	60	
Do.	14	2 0	...	5 0	140	
Upper lights	8	5 0	...	2 1½	85	
Do.	2	7 0	...	8 0	112	
Archways in passage						1,052
Square feet	...	...	...	...	...	7,945
Squares	...	...	...	...	...	79·45

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Lath and Plaster.						
Record-tower below joists	2	13 6	...	13 6	365	
Do. couples	1	13 6	...	14 9	199	
Square feet ...	...	...	...	...	564	
Squares ...	...	...	...	...	...	5·64
Painting Doors and Windows and exposed Wood-work of Roof, &c., with 3 Coats of Carson's Oak Color.						
Venetian and panel doors ... 3 ×	21	4 0	...	8 0	2,016	
Batten door ... ... 2 ×	1	2 9	...	6 6	36	
Venetian windows ... ... 3 ×	4	2 0	...	6 6	156	
Windows with iron bars and glazed shutters ... ... 3 ×	2	3 0	...	4 0	72	
Do. do. ... ... 3 ×	6	2 0	...	5 0	180	
Windows with glazed shutters... 2 ×	2	3 0	...	4 0	48	
Do. do. ... 2 ×	4	1 6	...	4 3	51	
Upper lights ... ... 2 ×	14	2 0	...	5 0	280	
Do. ... ... 2 ×	8	5 0	...	2 1½	170	
Barge boards	4	17 6	...	1 0	70	
Do.	4	2 0	...	0 9	6	
Do.	2	13 6	...	1 6	72	
Do.	4	5 3	...	1 6		
Finials	4	2 6	...	1 9	18	
Eaves boarding	2	1 6	...	10 6	32	
Barge boards	2	47 0	...	0 6	47	
Do.	4	14 6	...	1 0	58	
Do.	4	2 0	...	0 9	6	
Do.	2	10 9	...	1 4	29	
Do.	4	4 0	...	1 3	20	
Do.	4	1 3	...	0 7	5	
Finials	4	0 10½	...	0 7		
Eaves boarding	2	1 4	...	9 6	25	
Barge boards	2	12 0	...	0 6	81	
Do.	8	0 8	...	0 10	20	
Do.	1	8 0	...	0 4	2	
Do.	2	2 6	...	0 8	5	
Do.	1	2 3	...	0 7	4	
Eaves boarding	1	28 0	...	0 7		
Barge boards	4	12 3	...	0 5	12	
Do.	4	1 2	...	0 9	37	
Do.	4	4 0	...	0 7	3	
Finials	2	1 6	...	2 0	32	
Eaves boarding	2	19 6	...	8 0	24	
Posts	4	10 1	...	0 6	20	
Do.	14	7 8	...	1 8		
Do.	12	8 4	...	1 8	413	
Bases to do.	30	2 4	...	1 8		
Breastsummers	...	206 0	...	0 6	35	
Struts	47	2 9	...	1 3	258	
Cleats	51	0 9½	...	1 2	151	
Knobs	51	1 8	...	0 9	30	
Planks	47	2 0	...	0 6	43	
Pieces to secure rafters...	132	1 3	...	1 6	141	
Do. uprights	66	0 10	...	0 6	83	
Eaves boarding	2	32 0	...	0 9	41	
Do.	...	107 0	...	0 6	32	
				0 6	54	

3100/8

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting Doors and Windows and exposed Wood-work of Roof, &c., with 3 Coats of Carson's Oak Color—cont.						
Barge board	4	10 0	...	0 8½	28	
Do.	2	4 0	...	2 0	16	
Do.	2	8 6	...	1 2	20	
Do.	4	6 0	...	1 6	36	
Struts	...	18 0	...	2 6	45	
Turret cill	8	4 4	...	2 4	81	
Uprights	...	18 0	...	1 4	24	
Breastsummers	...	24 0	...	1 9	42	
Do. above	16	0 9	...	0 8	96	
Brackets	40	1 3	...	3 0	150	
Venetians	32	1 3	...	0 7	23	
Do.	8	3 0	...	1 3	30	
Brackets	8	0 6	...	1 3	5	
Knobs	8	2 0	...	0 9	12	
Joists	4	8 0	...	0 9	24	
Longitudinal pieces	8	1 0	...	7 3	58	
Uprights	4	0 9	...	8 9	26	
Do.	4	2 0	...	0 9	6	
Breastsummers	2	8 0	...	0 9	12	
Do.	4	2 0	...	1 0	8	
Do.	2	8 0	...	1 0	16	
Do.	20	0 8	...	1 3	17	
Brackets	2	8 0	...	0 8	21	
Rail	8	2 0	...	0 8		
Do. ... ... 2 ×	2	3 9	...	1 6	59	
Panels ... ... 2 ×	8	1 6	...	1 6		
Do. ... ... 2 ×	2	10 9	...	8 0	344	
Roof					6,117	
Square feet ...	...	...	...	...	...	61·17
Squares ...	...	...	...	...		
Painting Wood-work of Roof with 3 Coats of Wood-oil.						
Tie beams	3	25 0	...	2 4	175	
Principal rafters	6	14 6	...	1 10	160	
Struts	6	7 0	...	1 6	63	
Purlins	2	46 0	...	1 8	153	
Do	2	46 0	...	1 0	92	
Ridge	1	46 0	...	1 7	73	
Common rafters	64	16 10½	...	0 11	990	
Tie beams	4	20 6	...	1 8	137	
Principal rafters	8	11 9	...	1 2	110	
Struts	8	5 6	...	1 4	59	
Purlins	2	81 0	...	1 5	230	
Do.	2	81 0	...	1 0	162	
Ridge	1	81 0	...	1 7	128	
Common rafters	114	14 0	...	0 11	1,463	
Tie beams	2	16 6	...	1 6	50	
Principal rafters	4	9 3	...	1 0	37	
Struts	4	4 6	...	1 2	21	
Purlins	2	23 9	...	1 2	55	
Do.	2	23 9	...	1 0	48	
Ridge	1	23 9	...	1 5	34	
Common rafters	34	11 8	...	0 9	298	
Joists	20	13 6	...	1 6	405	
Rafters	28	11 6	...	1 1	349	

Detailed Quantities—cont.

Description of Work.	No.	Length.	Breadth.	Depth.	Contents.	Total.
		FT. IN.	FT. IN.	FT. IN.		
Painting Wood-work of Roof with 3 Coats of Wood-oil—cont.						
Collar pieces	10	8 6	...	1 4	113	
Ridge	1	19 6	...	1 5	28	
Verandah rafters	47	11 3	...	0 11	1,002	
Small do.	88	6 5	...	0 11		
Hip do.	8	14 0	...	1 2	131	
Ridge	2	11 0	...	1 1	24	
Wall-plate	..	96 0	...	1 0	96	
Verandah joists	62	9 6	...	0 11	578	
Do. do.	7	6 0	...	0 11		
Square feet ...	...	...	...	...	7,264	
Squares ...	...	...	...	...	...	72·64
Laying Zinc Sheets to the Valleys flashing.						
Verandah over entrance	4	14 0	...	...	56	
Do. near spiral	1	10 0	...	...	10	
Over property-room	1	11 0	...	...	11	
Do. record-tower	1	8 0	...	...	8	
Flashing over sloped verandah ...	.	95 0	...	...	95	
Lineal feet ...	...	...	...	...	180	
Exterior Ornamental Mouldings for record-tower.	...	...	...	..	48	L. feet.
Exterior Mouldings for Turret	...	...	..	...	30	L. feet.
Mouldings over Windows and Upper Lights.						
Property-room, gable windows ...	...	...	...	...	6	
Tower windows...	..	..	...	...	16	
Do. upper	...	...	...	...	44	
Court upper lights	...	...	...	...	18	
Lineal feet...	...	...	...	...	84	
Interior Dental Cornic.						
Court	...	...	...	...	124	
Head clerk's room	...	...	...	...	68	
Gumastah's room	...	...	...	...	96	
Passage	...	...	...	...	54	
Retiring-room	...	...	...	...	72	
Lineal feet ...	...	...	...	...	414	
Interior Plain Cornice	...	...	...	...	414	
Circular Ornaments in court gables ...	...	6 in number.				
Spiral stairs	...	...	...	...	28	Steps.
Stone finial for turret	...	1 in number.				

ABSTRACT.

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
490 c. yds.	Excavation for foundation ...			
2,948 c. feet.	Concrete			
4,448 „	Brickwork in foundations ...			
1,669 „	Do. in basement			
11,016 „	Do. in superstructure ...			
34 „	Stonework under posts and trusses.			
248 „	Do. in steps, &c., if easily procurable.			
236 „	Segmental archwork			
63 „	Semi-circular do.			
227 c. yds.	Earth-filling in basement ...			
1,103 c. feet.	Teak-wood wrought and put up ...			
672 sq. feet.	Venetian and panel doors with frames complete.			
18 „	Batten doors with frames complete.			
52 „	Venetian windows with frames ...			
84 „	Windows with iron bars and glazed shutters including frames.			
50 „	Windows with frames and glazed shutters.			
225 „	Upper lights with frames and glazed shutters.			
561 lb.	Wrought iron in trusses, &c. ...			
45·58 sqrs.	Flooring with 6″ square pavement tiles.			
64 „	Tiling with flat and pan tiles, teak reepers and chunam bands ...			
12 „	Terracing			
1·14 „	Do. roof of turret			
104·26 „	Plastering interior walls			
79·45 „	Pointing exterior walls			
5·64 „	Lath and plaster			
61·17 „	Painting doors and windows, &c., with three coats of Carson's oak color.			
72·64 „	Painting wood-work of roof with three coats of wood-oil.			
180 l. feet.	Laying zinc sheets to the valleys of roof and flashing.			
48 „	Exterior ornamental mouldings for record-tower.			
30 „	Exterior ornamental mouldings for turret.			
84 „	Exterior ornamental mouldings over windows and upper lights.			
414 „	Interior dental cornice.			
414 „	Do. plain do.			
6 No.	Circular ornaments over lights in court gables.			
28 steps.	Spiral stairs			
	Allow extra for finishing turret ...			
1 No.	Stone finial for do. ...			
2 „	Allow extra for finishing court gables.			
2 „	Allow extra for finishing record-tower gables.			
2 „	Allow extra for finishing end gables.			

302/9

Abstract—*cont.*

Quantity.	Item.	Rate.	Per.	Amount.
		RS. A. P.		RS. A. P.
1 No.	Allow extra for finishing property-room gables.			
2 „	Allow extra for finishing court verandah gables.			
47 „	Allow extra for finishing brackets for verandah posts.			
2 „	Allow extra for finishing bay windows.			
	Fittings for property-room ...			
	Contingencies at 5 per cent. ...			
	Total ...			

CHEPAUK,
30th July 1879.

(Signed) R. CHISHOLM,
Consulting Architect to Government.

ORDER—dated 6th September 1879, No. 2294 W., Public Works.

The papers now submitted by the Consulting Architect comprise nine drawings, one specification and detail and abstract estimates for Sub-Judges' and District Munsifs' Court-houses for which standard designs were sanctioned in G.O., No. 3929 W., dated 9th October 1878.

2. The papers will be printed and circulated for the information of the department.

3. The Consulting Architect will be informed that the alternative plans for terrace-roofed buildings should be treated in a similar manner.

(True Extract.)

(Signed) R. H. SANKEY, Colonel, R.E.,
Secy. to Govt., P.W.D.

To Superintending Engineers.
To the Consulting Architect.
„ Judicial Department.

Exd. E. Fernandez.

BUILDLNGS AND ROADS.
CIVIL WORKS.

Govt. of 1879 Madras.

PUBLIC WORKS.

Dated September, 6th.

Recd. *Encl.*

G.O., 6th Sept. 1879, No. 2294 W.

SEPTEMBER.

Sub-Judges' and District Munsifs' Court-houses

The plans, specification, and estimate forwarded by the Consulting Architect for — to be printed and circulated for the information of the department.

3102
11

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

25th August 1881, No. 2,121 W.

Buildings and Roads.
Civil Works.

Read the following paper :—

No. 104. From the Superintending Engineer, Third Circle, dated 10th August 1881, No. 687 T.C.

No. 105. ORDER THEREON, 25th August 1881, No. 2,121 W.

The estimate, amounting to Rs. 13,800, for constructing a District Munsiff's Court at Ariyalúr, in the Trichinopoly Division, is sanctioned for execution when funds are available.

2. The present estimate is in lieu of the one for Rs. 8,550 sanctioned in G.O., No. 1,308, dated 7th May 1875. The excess of Rs. 5,250 is due to the present estimate having been prepared in accordance with a different standard plan, as well as to the necessity for taking the foundations down to rock, and also to an increase in rates.

3. This sanction has been entered as Provincial No. 61 W. of 1881-82 in the register of this office and classified as Civil Buildings, Original Works.

(True Extract.)

(Signed) R. H. SANKEY, Colonel, R.E.,
Secretary to Govt., P.W.D.

To the Superintending Engineer, Third Circle, with four enclosures.
" Examiner of Public Works Accounts, with duplicate Abstract Estimate.
" Judicial Department.

Exd. S. T. Austin.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of [1881] Madras.

PUBLIC WORKS.

To

THE SUPERINTENDING ENGINEER,
THIRD CIRCLE,

&c. &c. &c.

Dated August, 25th.

Issued

Rec'd. Encl.

G. O., 25th August 1881, No. 2,121 W.

AUGUST.
Nos. 104-105.

District Munsiff's Court at Ariyalúr in the Trichinopoly Division.—Sanctions for execution when funds are available the estimate for constructing a —.

No. 3019.

CURRENT NO. 4224

Rec'd 8/11

High Court of Judicature,
Madras, 8th November 1886.

From H. F. Ross Esquire,
Registrar of the High Court
of Judicature at Madras

To The Honourable A. E. Stokes,
Ag. Chief Secretary to Government.

Sir,

I have the honor to submit for the sanction of Government, the accompanying plans and Estimates and other papers, for providing a road, compound wall and latrine, costing in all Rs. 1230, for the Court of the District Munsif of Ariyalur, Trichinopoly District. A new building has but recently been erected for the Court, but it is explained that the standard plan adopted did not provide for latrine and compound wall &c. The attention of the District Judge has been called to the necessity of submitting complete estimates for all

3 Plans.
1 Estimate & abstract.
1 Report.
1 Copy of District Judge's Letter to Superintending Engineer 2/3 Nov 1886.

that

3100/13

that may be requisite, whenever new buildings or improvements are proposed for the sanction of Government.

2. The grant for "Petty constructions and repairs" has been allotted for other necessary works in the several Districts, and the present work cannot be carried out from the small balance now remaining at the Court's disposal.

I have the honor to be,
Sir,
Your most obedient Servant

Registrar,
Appellate Side.

3100
14

Jud C 729-81: 1886 &c.

P.W.C. No. 2063

CURRENT NO. 4224

2/21 to 25-8-81
2294 to 6-9-79

Judicial {1886} Department.

No.

FROM

THE REGISTRAR OF THE HIGH COURT
OF JUDICATURE AT MADRAS,
APPELLATE SIDE.

19 NOV 86

Dated 8th November 1886
Received 10 19-11-86

No. 3019

Encl: Six (6) plans

Submitting, for sanction, estimate, certain observations, plans and Estimates &c for providing a road compound wall and latrine costing in all Rs 1230 for the Court of the District Munsif of Srirangam, Trichinopoly District

CHIEF SECRETARY
NOV 26
GOVT. MUSEUM OF MADRAS

H. Proc.

W.C. 1914 C 17/11/86

Approved and transferred to the P. W. Dept.

By order
H. B. Grant
Asst. Secy. to Govt.

Copy to Reg. High Ct.

13/11 M. B. O. R. 12. 1.

Trichinopoly District Court
30th November 1886

No 1594

From
The District Judge
of Trichinopoly

To
The Superintending Engineer

Sir,

I have the honour to enclose copy of a letter from the Srirangam District Munsif regarding the state of this Court house, and to say that I satisfied myself by personal inspection during my recent visit to Srirangam of the justice of his remarks.

The state of the windows is particularly objectionable. None of them can be opened. The place where hinges ought to be is filled by a small wedge of wood, and the frames are screwed up. The Head Court have made special point of the proper ventilation of record rooms, and therefore (I suppose) the Munsif has only mentioned the windows of that room: but all the windows are in the same state. As to the bolts of the doors, I specially noted them. The cross bolt is placed conveniently near the centre

and as the existing are only screened by a wooden partition, which naturally gets very soon loose, this is most insecure.

While on the subject of the court house I have the honour to draw your attention to three important omissions.

1. There is no compound wall. A similar defect has been noticed in the Kulitalai court, and an estimate has been prepared and sanctioned. A wall is specially required at Aryalur, as the court is situated close to the site of the weekly market, and there is no means of keeping off trespassers.

2. There is no road up to the court house. It is difficult for the Munsif to drive up to the entrance even in fair weather, and in wet weather would be almost impossible.

3. There is no latrine. This is a great inconvenience both for the Court officials and for suitors and witnesses.

I have the honour to request that you will be good enough to take steps to have the necessary repairs carried out, and these defects remedied.

I have the honour, Sir,
Your most obedient servant
(Signed) Duncan Jervis

(True Copy) 31/12/16
W. Wallace
Ag. District Judge

Enclosure three
High Court's letter
dt 28/10/86 No 3019.

Copy of the District Judge's
letter to the Superintending
Engineer dated 3rd November 86.

3100/

No 169 T.C 3105/17

Report by the superintending Engineer Circle on the Estimate for providing Compound wall and Latrine to the District Monsif Court House at Arealur in the Trichinopoly District, Rupees 1180-

NSV 7/1/87 Msg to

A new Court House has been built by this Department on an Estimate of Rs 13,800 sanctioned in G.O. No 212 W of 23 August 81.

Enclosures 3. Estimate 1 Plan 1 Site plan.

2. The standard plans circulated with G.O. No 2294 W of 6 September 79 was adapted, in which no provision was made for Latrine & Compound wall.

3. The District Judge at Trichinopoly requested in his letter No 1594 of 3d October 85 to provide Latrine & Compound wall to the Court House, accordingly the Estimate has been prepared by the Executive Engineer Trichinopoly-

4

4. The Estimate provides for:—

Compound wall with brick in clay & plastered over	830.
Horburys patent privys for natives made with corrugated iron & provide 5 seats	350.
Rupees.	1180

Horburys privys have been provided in the Estimate at the Special request of the District Judge.

5. The rates are fair & the Estimate is forwarded for the sanction of Government thro' the District Judge of Tinnevelly.

Kodaikanal
5th July 1886.

Dest 181

Lt Col RE
Supt Engineer, Trivlo.

3 Encl
18

1229 Dis H.C. dc 372/86

4 AUG 1886

From,

The Supg Engineer
6th Circle

To,

The District Judge
Trichinopoly

No 169. T.C

Dated 5th July 1886.

Encls: 3.

Report on the estimate for bording compound wall and latrine to the District Munsiff's Court House at Ariyalur in the Trichinopoly District—

24/86

3162/19

PUBLIC WORKS DEPARTMENT.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the

READ the following

From the Registrar of the High Court of Judicature at Madras. H. C. No: 3019 dt/8 Nov/86
Endorsement by the Judicial Department. H. C. No: 1914 Cdt/18 November 1886

The estimate amounting to Rs. 1,230, for constructing a compound wall and a latrine for the District Munsif's court at Ariyalur in the Trichinopoly District, is sanctioned for execution when funds are available.

2. This sanction has been registered as Provincial No: 141 W of 1886-87, and classified as Civil Buildings, Original Works.

22.11.86.

2/12

To The Supty. Engr. VI Circle with 6 encls.
" Examiner of P. W. Accts with the estimate for note & return D.S. & VII
" Judicial Department

22/11/86.

24/11

ECO
20

9083.

Govt. of {1886} Madras.

PUBLIC WORKS.

Dated

Read. Encl.

G.O., 23rd Nov. 1886, No. 3100 W

District munsif's
Court at Ariyalur

Estimate of Rs 1,230
for constructing a
compound wall &
a latrine for the
in the Trichinopoly
District, submitted

55 60/4

Rec'd 11 Dec 24/11