R

27 OCT 87

12

SITE PLAN
OF A
RACQUET COURT
GOVT. HOUSE
MADRAS

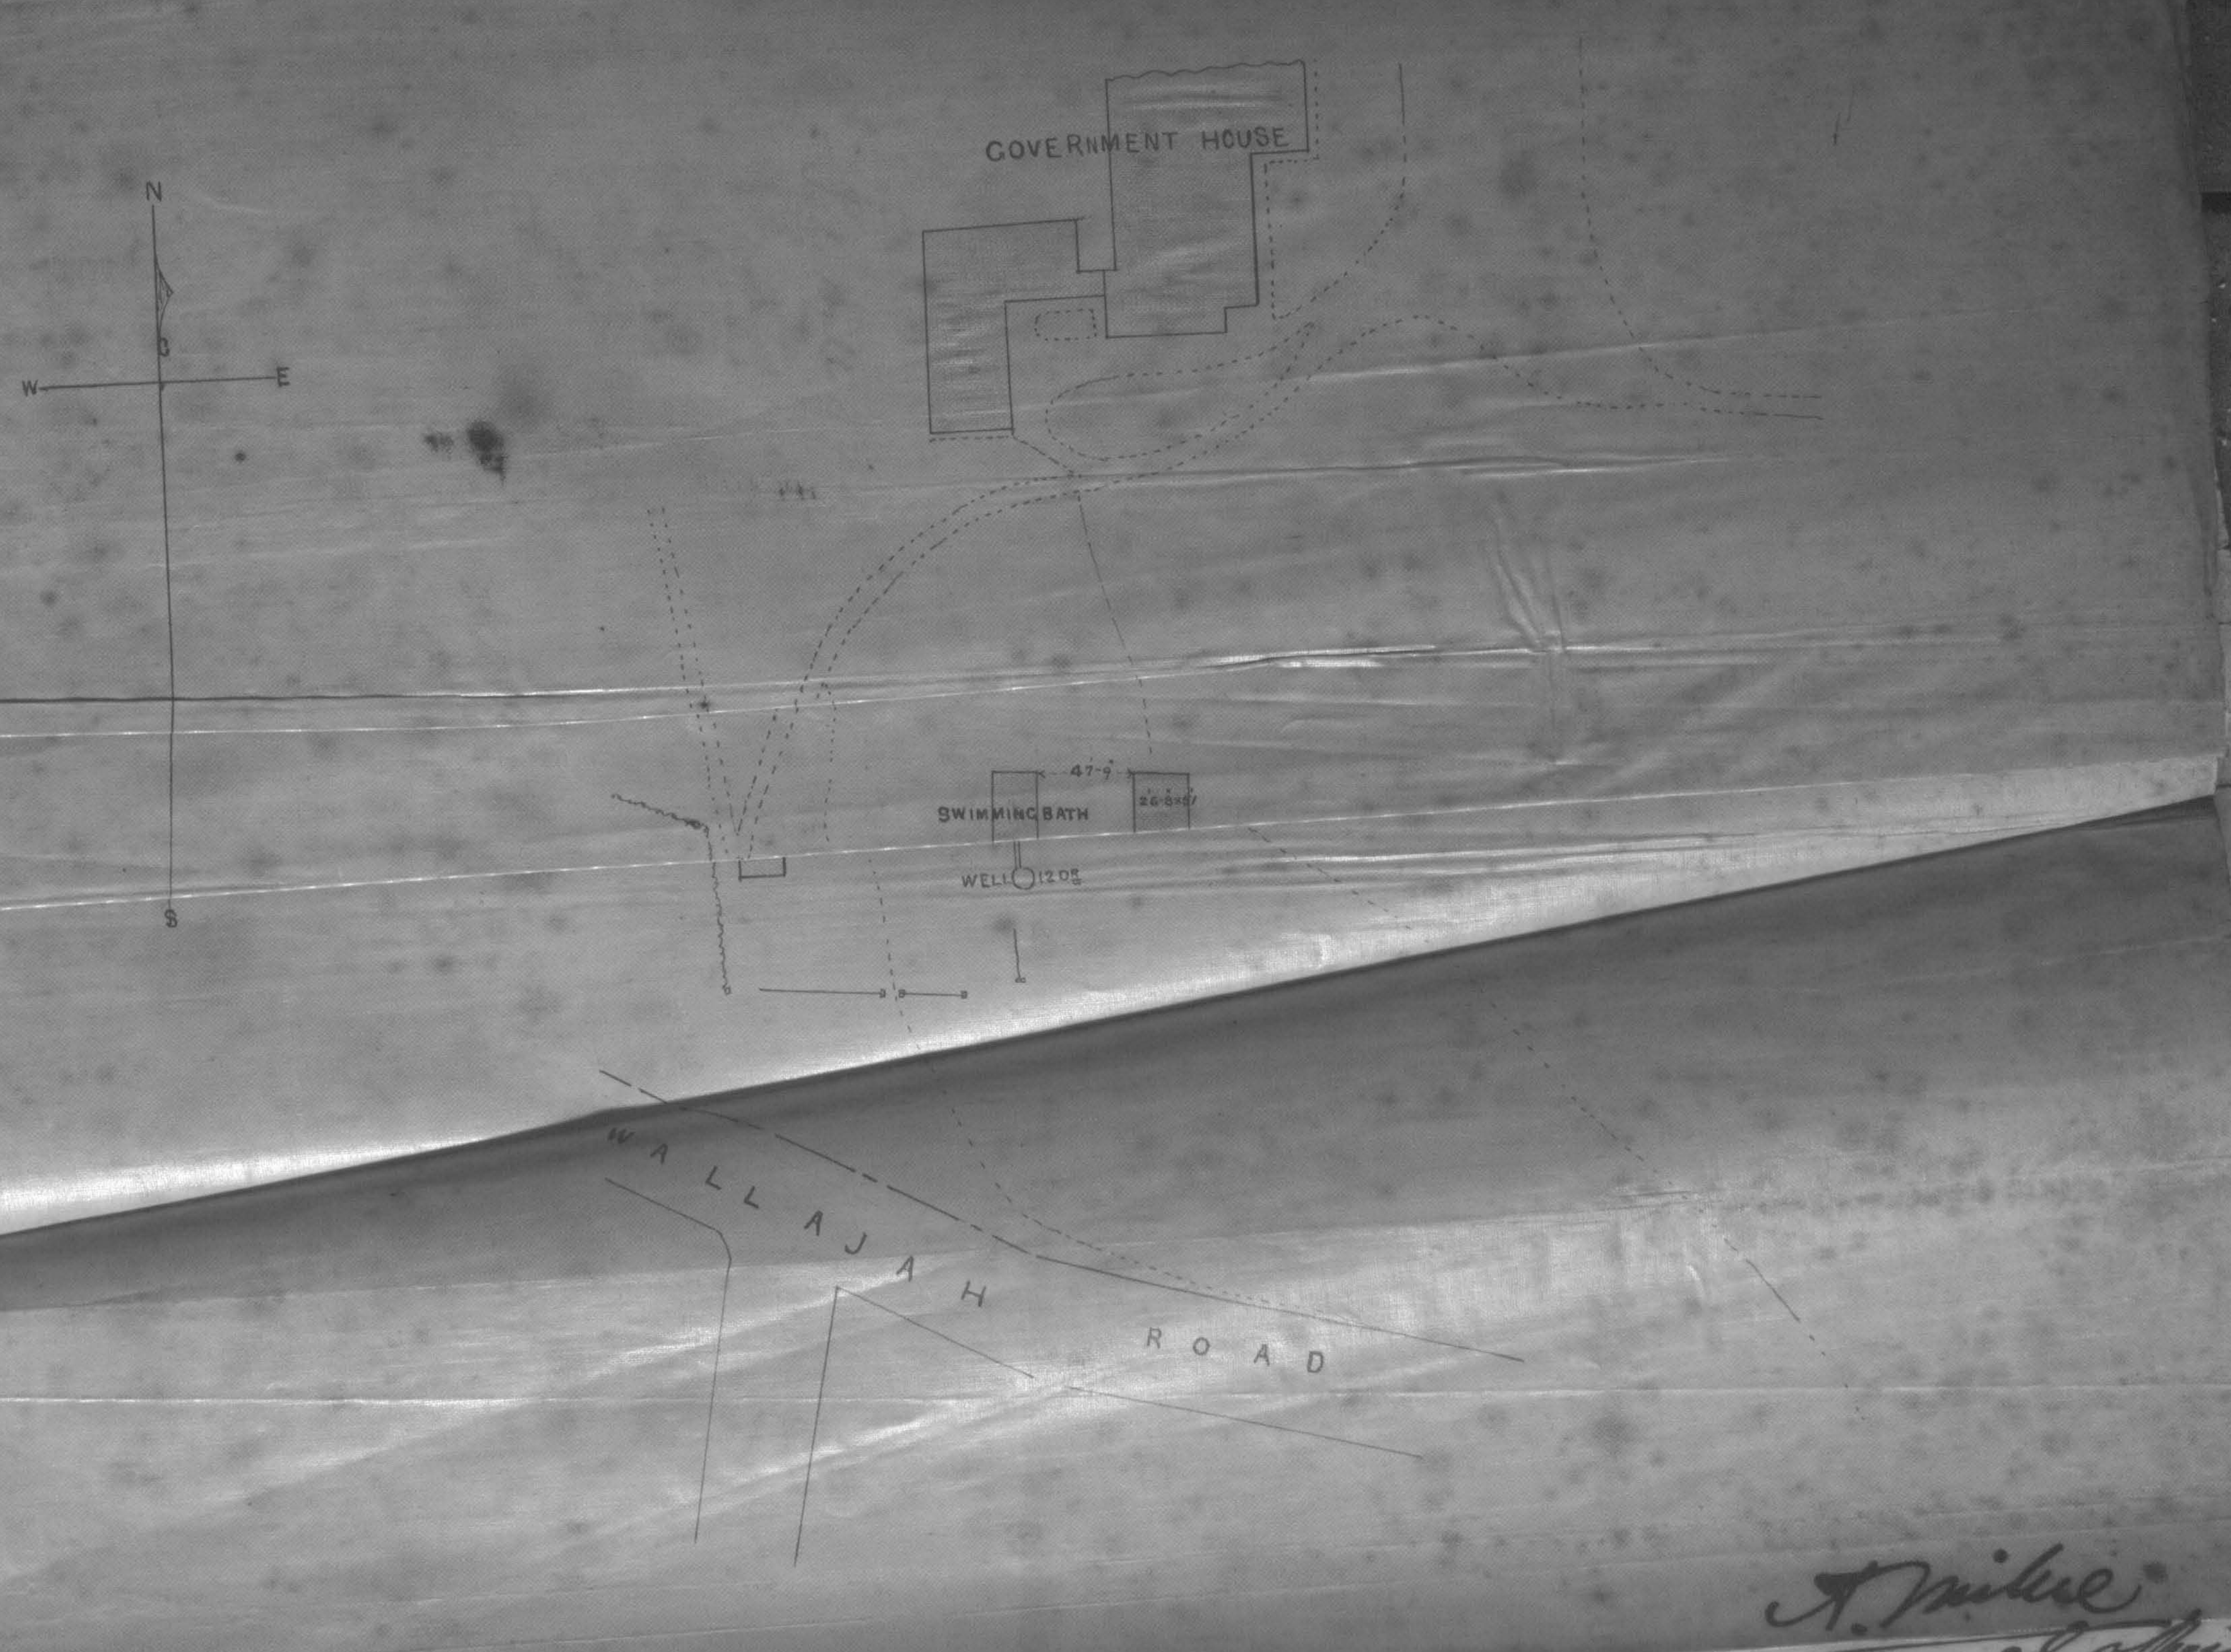

A. Milne
Sub Dn Officer
25-10-87

Col. R.E.
Superintg: Engineer: V Circle.

Colonel R.E.
Executive Engineer Presy Dn.

November 1887

[P. W. D. Code.—Paras.] 27 OCT 87

Estimate for building a Racquet Court at Government House, Madras.

P. W. D. Form. No. M 204.

ESTIMATE FORM.—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet. Length.	Breadth.	Depth.	Area or Contents.	Total Quantity of each description of Work.
Concrete in Surkee						
Side walls of Bath & Cloak rooms	2	28½	3	1	171—"	✓
Front & rear walls of Do	2	5⅔	3	1	34—"	✓
Cross walls of Do	1	5⅔	3	1	17—"	✓
Side walls of Court yard	2	37	5	1	370—"	✓
Face walls of Do	1	30⅚	5	1	154—2	✓
Butters to walls	14	5	2½	1	175—"	✓
Total Cft of Concrete					921—2	or 921 Cft.
Foundation—						
Side walls of Bath & Cloak rooms	2	27⅜	1⅞	4	410—7	✓
Front & rear walls of Do	2	6¾	1⅞	4	101—3	✓
Cross wall of Do	1	6¾	1⅞	4	50—7	✓
Side walls of Court yard	2	38¾	2⅝	5	1017—2	✓
Step in front —	1	5	1	1	5—0	
Face wall of Do	1	28⅜	2⅝	5	372—5	✓
Stair case wall	1	8	2	4	64—"	
Batters to walls	14	3½	2½	5	612—6	✓
Total Cft of foundation					2633 ~~2628~~—6	= 2628½ C 2633
Basement—						
Side walls of Bath & Cloak rooms	2	26⅔	1⅙	1	62—2	✓
Front & rear walls of Do	2	7½	1⅙	1	17—6	✓
Cross wall of Do	1	7½	1⅙	1	8—9	✓
Side walls of Court yard	2	40	⅚	1	66—8	✓
Step in front —	1	5	1	½	2—6	✓
Face wall of Do	1	26⅔	⅚	1	22—2	✓
Stair case wall	1	8	1½	1	12—"	
Batters to walls	14	1⅔	2½	1	58—4	✓
Total Cft of Basement					~~247—7~~ 250—1	

20,000—10-11-86.

4

ESTIMATE FORM.—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet. Length.	Breadth.	Depth.	Area or Contents.	Total Quantity of each description of Work.
Superstructure.					250—1 247—7	
Front & rear walls of bath & cloak rooms	2	7½	1/6	11¾	205—7	
Side walls of Do	2	26⅔	1/6	11¾	731—1	
Cross wall of Do	1	7½	1/6	11¾ ~~6~~	103 ~~52~~—6	
Stair case wall of Do	1	8	1½	11¾	141—"	
Do Do above terrace	2	9½ 8	1/6	8	171—1 149—4	
Front and rear walls stair case	2	8	1/6	8	36—"	
Side walls of court yard	2	40	5/6	17½	1166—8	
Parapet wall over stair case	1	25	1/6	¾	21—11	
Face wall of Do	1	26⅔	5/6	20	444—5	
Buttress walls	14 14	1⅔ 1⅓	1⅞ ½	13 7	568—9 82—	
Parapet walls all round	1	68⅓ 39	1/6	2½	113—9 199—4	4055—4
Total					3906—3 ~~4039~~	
Deductions—						
Doors large	2	4	1/6	7	65—1	
Do small	1	3 1/12	1/6	5 7/12	20—1	
Windows	2	3½	1/6	4½	36—9	
Flat archwork above doors	2	5	1/6	1/6	13—7	
Do Do	1	3¾	1/6	1/6	5—1	
Do Windows	2 ~~3~~	4	1/6	1/6	11 ~~16~~—4	
Do Door for staircase	1	4	1/6	1/6	5—3	
Total deductions Cft					157—½	
Net total Cft					3882 3749—1	3898¼ ~~3882~~ = 3749 Cft.
Do Flat arch work						35 Cft.
Teakwood work—						
Joists to Cloak & bath rooms	12 16	9	3" 3½	5" 4½	11—3—" 15—9—"	
	6	4½	3"	5"	2—9—9	
Do for stair case	6	4½	2½	3½	1—7—6	
Wall plates	21	25 ~~53~~	4"	2"	2—9—4 ~~2—11—4~~	
Total teakwood wrought & put up Cft					20-3-10	18—5—4 = 20¼ Cft.
Doors—						
Doors large ⅓ panelled & ⅔ Venetian	2	4	"	7	56—"	
Total Sqft of doors						56 Sqft.

[P. W. D. Code.—Paras.]

27 OCT 87

5

P. W. D. Form.
No. M 204.

ESTIMATE FORM.—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet. Length.	Breadth.	Depth.	Area or Contents.	Total Quantity of each description of Work.
Panelled doors	1	3 1/12	"	5 7/12	17—2½	
Do for stair case	1	3	"	6½	19—6	
Total Sqft panelled doors					36—8½	= 36¾ Sqft.
Windows—						
Venetian windows	2	3½	"	4½	31—6	
Total Sqft Venetian windows						31½ Sqft.
Terracing—						
Terracing over rooms	1	25¾	"	9	231—9	
Do Stair case	1	9	"	4½	40—6	
~~Deduct space of staircase~~		8	3		24	
Total Sqft terracing					272—3 248—3	2.48 or 2¾ Sqrs.
Granite Stone—						
Steps for stair case having a rise of 8" inches	18	4'	1'	8"	48—"	
Total Cft granite stone						48 Cft.
Cement plastering inside ½" thick. 1 Cement + 1½ Sand						
Side walls of rooms	2	23 1/6	"	11¾	544—5	
Cross walls	4	7½	"	11¾	352—6	
Side walls Court yard	2 ~~1~~	25	"	17½ ~~20~~	875 ~~500~~—"	
Face walls	2	40	"	17½	1400—"	
Stair case wall 1 × 17½ × 11¾ = 206					206—6	
Total Sqft Cement plastering					3377 ~~2796~~—11 3172	
Deductions						
Doors large	3 ~~2~~	4	"	7	84 ~~56~~—"	
Do small	2	3 1/12	"	5 7/12	35 ~~17—2~~	
Windows	2	3 1/12	"	4½	28 ~~31—6~~	
Total Deductions Sqft					147 104—8	
Net total Cement plastering					2692—3 3026 3230	32.31 = 27 Sqrs.

20,000—10-11-86.

4

ESTIMATE FORM.—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total Quantity of each description of Work.
		Length.	Breadth.	Depth.		
Outside Chunam plastering						
Side wall Cloak room	1	26 2/3	"	11 3/4	313-4	
Cross wall of Do	2	9 10/12	"	11 3/4	231-1	
Stair case all round	1	30		8	242-0	
Parapet wall all round	1	69 1/2	"	6 1/4	434-4	
Bundy wall over Stair case	1	31		2 1/4	70-0	
Side walls of Court yard	2	40 5/6	"	17 1/2	1429-2	
Face wall of Do	1	26 2/3	"	20	533-4	
Stair case walls	2×2	8	"	8	256-"	
Batters	14	3 1/2	3 3/4	13	637-"	
Total Sqft					~~3434-3~~ ~~3948~~	4092-11
Deductions—						
Doors large	~~2~~ 1	4	"	7	~~56~~ 28-"	
~~Do Small~~	~~1~~	~~3 1/2~~	"	~~5 7/12~~	~~17-3~~	
Windows	2	3 1/2	"	4 1/2	31-6	
~~Batters~~	~~14~~	~~1 2/3~~	"	~~13~~	~~303-4~~	
Total deductions Sqft					~~408-1~~ 60	
Net total Chunam plastering Sqft					~~3426-2~~ 4033-10	40.38 ~~3948~~ or ~~34 1/4~~ Sqrs
White Paint 3 Coats						
Joists to rooms	12 ~~16~~ 6	7 1/2 3	" "	13" ~~12~~ 13	98 ~~120-"~~ 20	
Do Stair case room	6	3	"	9 1/2	14-3	
Total Sqft White paint					132-3 ~~134-3~~	1.32 = 1 1/2 Sqrs
Chocolate Paint 3 coats.						
Doors	2	4	times 3	7	168-"	
Pannelled doors	1	3 1/2	2	5 7/12	34-5	
Do Stair case room	1	3	2	6 1/2	39-"	
Venetian windows	2	3 1/2	3 1/2	4 1/2	110-3	
Total Sqft of Chocolate paint					351-8	= 3 1/2 Sqrs
Cornice						
Round Stair case	1	35	°	°	35	
3 Sides of cloak & bath rooms	1	46	°	°	46	

7

[P. W. D. Code.—Paras.]

27 OCT 87

P. W. D. Form.
No. M 204.

ESTIMATE FORM.—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet.			Area or Contents.	Total Quantity of each description of Work.
		Length.	Breadth.	Depth.		
Flooring—						
Flooring with old Cut stone taken from the Fort & set in 3" of Concrete & pointed with portland Cement including dressing the stone where required & all other Charges						
Cloak room	1	23 1/6 ~~23 1/3~~	"	7 1/2	174 ~~175-"~~	
Court yard	1	40	"	25	1000-"	
Total Sqft of flooring					1175-"	= 11 3/4 Sqrs
Galvanized netting with wrought iron stand & fixed in Cut stone including all Charges	1	108	3	"	324-"	
Total Sqft					324-"	= 324 Sqft
Excavation—						
Side walls of bath & cloak room	2	28 1/2	3	5	855-"	
Front & rear walls of Do	2	5 3/4	3	5	172-6	
Cross walls of Do	1	5 3/4	3	5	86-3	
Stair case wall	1	8	3	5	120-"	
Side walls of Court yard	2	37	5	5	1850-"	
Face walls of Do	1	30 1/2	5	5	762-6	
Batters—	14	5	2 1/2	5	875-"	
Total Cft foundation					4721-3	= 4721 Cft
High Scaffolding					Rs	25
Petty Supervision @ 2 1/2 pc						
Contingencies @ 5 p.c						

20,000—10-11-86.

8/

1/721 P.d
21.11.87

ESTIMATE FORM.—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet. Length.	Measurements in Feet. Breadth.	Measurements in Feet. Depth.	Area or Contents.	Total Quantity of each description of Work.

E.D. 5

P.W. ~~1702~~
1914 S.

9

ESTIMATE FORM.—Abstract.

Quantity.	Description of Work.	Rate.	Per	Amount	TOTAL.
		RS.		RS.	RS.
4721	Cft Excavating & filling in basement	5-„-„	Cft 1000	24	
921	Cft Concrete in Surkee	18-„-„	100	166	
2634¼ 2628½	Cft Foundation Stock bricks in Mortar	19-„-„	100	500 499	
~~3883~~ 3898 3749 135	Cft Superstructure in Stock bricks do (4ft) [illegible]	22-„-„ 35-„-„	100 100	~~824~~ 825 9	858
32.31 27	Sqs Plastering with Cement ½" thick 1 Cement to 1½ sand	8-6- 8-6	Sq	226 ~~233~~	271
40.33 34¼	Sqs Plastering 2 Coats with Mortar	2-4-„	Sq	77	96
11¾	Sqs Putting down Cut stone flooring using old Stone on 3" Concrete and pointing with portland Cement	8-„-„	Sq	94	
18-5-7 20¼	Cft teak wrought & put up	3-8-0 ~~3-10~~ 3-8-„	Cft	69 65 71	
87½	Sqft Doors and windows	1-2-„	Sqft	98	
36¾	Sqft Doors panelled	1-„-„	„	37	
3½	Sqs Painting 3 coats Chocolate	2-12-„ 3-2-„	Sq	10 11	
1.32 1½	Sqs White paint 3 Coats	2-12-„ 3-„	„	4 5	
324	Sqft Wire netting including Stands	½-8-„	Sqft	162 122	All.
2¾ 2.48	Sqs Terracing with brick on edge, 3" of Concrete, 3 Courses of flat tiles & 3 coats of mortar	26-„	Sq	64 72	
81	Cft of Coping (bricks in Mortar)	0-4-0	Cft	20	
48	Cft Cut stone for steps	1-12-„	Cft	84	
	Erecting High Scaffolding	-	-	25	2,587
	Petty supervision 2½ pc			60 59	64
	Contingencies 5 pc			105 ~~127~~	129
	Rupees Two thousand seven hundred & eighty only				2780

Col. R.E.
Superintg: Engineer: V Circle.

2780
~~2435~~

Grand Total of Estimate .. ~~2600~~ 2640 All.

Ex'd. [illegible]

STATION Chepauk 14-11-87
Dated 25 Oct 1887

A. Milne
Sub Dl. officer [illegible]

Thompson Col. R.E.
Executive Engineer. P. Dn.

10

REFERENCE TO MADRAS P. W. D. CODE.
PARAS. 921, 932, &c., 949, 952—955, 962—934.

6/721 P.S.
24/11/87

P. W. D. FORM.
No. M 207.

CIRCLE—V
DIVISION—Presidency

ESTIMATE FORM.—Abstract.

(To accompany the Detailed Estimate No. 296 of 188 -8, for * .)

Building a Racquet Court at Government House, Madras. Rs ~~2600~~ 2780

* Here enter the name and description of work in full.

11

Estimate No. 296 of 1887-88

Financial Head— Provincial Service

Budget Head— Civil

Departmental Head— Original Works.

Main Head— Administration

Sub-Head— Residencies for Local Governments.

Project of which the work forms part—

Section—

Name of Work— Building a Racquet Court at Government House - Madras -

Amount of Estimate— Rs 2780 —

To be carried out by— the Exec. Engineer Presidency Division -

REFERENCES.

N.B.—This space should not be written upon as it is required for filing.

12/

REFERENCE TO MADRAS P. W. D. CODE
PARAS.

P. W. D. FORM.
No. M 293.

5th CIRCLE.

DIVISION— Presidency

Station ~~TALUK~~ Madras

ESTIMATE FORM—Wrapper or Outer-sheet.

Estimate for* Building a Racquet Court at Government House Madras

Amount of Estimate, Rs. 2780

Detailed Estimate, No. 296 of 1887-8 8

---

* Here enter name and description of work in full.

000—30-7-86

15
13

27 OCT 87

ESTIMATE FORM.—Abstract.

Quantity.	Description of Work.	Rate.	Per	Amount	TOTAL.
		RS.		RS.	RS.
4721	Cft Excavating & filling in basement	5-„-„	Cft 1000	24	
921	Cft Concrete in Surkee	18-„-„	100	166	
2634 ~~2628½~~	Cft Foundation Stock brick in Mortar	19-„-„	100	500 ~~499~~	
3898 ~~3887~~ ~~3749~~	Cft Superstructure Stock brick in Mortar	22-„-„	100	858 ~~854~~ ~~825~~	
35	Cft Flat arch work in chunam	25-„-„	100 Cft	9	
32.31 ~~27~~	Sqrs Plastering with Cement ½" thick 1 Cement to 1½ sand	~~8-6~~ 8-6	Sq	271 ~~226~~ ~~259~~	
40.33 ~~24¼~~	Sqrs Plastering 2 Coats with Mortar	2-4-„	Sq	96 ~~77~~ ~~93~~	
11¾	Sqrs Putting down Cut stone flooring using old stone on 3" Concrete & pointing with portland Cement	8-„-„	Sq	94	
18 ~~20¼~~	Cft Teak wrought & put up	3-8-„ ~~3-12~~ 3-8-„	Cft	65 ~~71~~	
87½	Sq ft doors and windows	1-2-„	Sqft	98	
36¾	do Doors panelled	1-„-„	do	37	
3½	Sqrs Painting 3 Coats Chocolate	2-12-„ ~~3-2-„~~	Sq	10 ~~11~~	
1.32 ~~1½~~	„ White paint 3 coats	2-12 ~~3-„~~	„	4 ~~5~~	
324	Sq ft Wire netting including stands	„-8-„	Sqft	162 ~~122~~	
81	Cft of Cornice (brick in mortar)	„-4-„	Cft	20	
2.48 ~~2¾~~	Sqrs Terracing with brick on edge, 3" of Concrete, 3 courses of flat tiles & 3 coats of plaster	26-„-„	Sq	64 ~~72~~	
48	Cft Cutstone for steps	1-12-„	Cft	84	
	Erecting high Scaffolding	-	-	25	
	Petty Supervision @ 2½ pc			64 ~~59~~ ~~58~~	
	Contingencies @ 5 pc			129 ~~105~~	

Rupees Two thousand seven hundred & eighty only

Col. R.E.
Superintg: Engineer: V Circle

Major 9th Lancers
Mily: Secy
5.2.88

Grand Total of Estimate .. 2780 ~~2735~~ ~~2600~~ 2640

Recd
4-11-87

STATION Chepauk
Dated 25th Oct 1887

A. Milne Sub Divl Officer
Executive Engineer. P. Dn.

13

REFERENCE TO MADRAS P. W. D. CODE.
PARAS. 921, 932, &c., 949, 952—955, 962—964.

5/721 Pd
21.11.87

P. W. D. FORM.
No. M 207.

CIRCLE— V

DIVISION— Presidency

ESTIMATE FORM.—Abstract.

(To accompany the Detailed Estimate No. 296
of 1887-88 for * .)

Building a Racquet Court at Government House, Madras, Rs 2780

* Here enter the name and description of work in full.

15

Estimate No. 296 *of* 1887-88

Financial Head— Provincial Service

Budget Head— Civil

Departmental Head— Original works

Main Head— Administration

Sub-Head— Residences for Local Govt

Project of which the work forms part—

Section—

Name of Work— Building a Racquet Court at Government House, Madras

Amount of Estimate— 2780 Rs 2735 - -

To be carried out by— E. P. W. D. Exec Engineer - Presidency Division.

REFERENCES.

16

Entd 2/721 P.S
21-11-87

P. W. D. Form.
No. M 203.

Regd No 836 M.
16-2-88

Reference to Madras P. W. D. Code.

Paras. 1074 to 1076.

Circle. 5th

Division— Presidency

~~Talug~~ Station— Madras

E. 8
3

Pk 1703

ESTIMATE FORM—Wrapper or Outer-sheet.

Estimate for* Building a Racquet Court at Government House

Amount of Estimate, Rs. 2735-0-0

Detailed Estimate, No. 296 of 1887-88.

AP 16/21

---

*Here enter name and description of work in full.

17

27 OCT 87

2/721 P.S
21-11-87

Specification and Report to accompany a plan and estimate for building a Racquet Court at Govt. House, Madras.

Amount of Estimate Rs ~~2,736~~ 2780-0-0

Report

The Chief Engineer examined the plan, and selected a site on the morning of the 21st October 1887. He gave Mr. Milne, Sub. Engineer, verbal orders to proceed with the work at once.

The Court is to be 40 feet long and 25 feet broad. The front or face wall is to be 20 feet high, and the two side walls 15 feet high at the lowest part; on the top of the wall will be 3 feet of netting. There are to be a bath room and a cloak room on the south ~~with~~ and steps leading on to the terraced roof. The face or high wall is to be on the north.

Specification

The whole of the brickwork is to be of stock bricks; the wood work, doors and windows are to be of teak. The inside of the Court is to be plastered with a mixture of 1 cement to 1½ sand; and the outside of the walls and the interior of the rooms are to be plastered with 2 coats of mortar, polished. The floor is to be old cut stone taken from the Old Racquet Court in the Fort.

Now being converted into a Gymnasium

Further particulars and

16

and dimensions in detail will be found in the plan and estimate.

A. Milne

Sub Dn Officer Works

Chepauk
25th October 1887

~~19~~

1/330 M
16-2-88

E. 2
P4/7021/86
1914

20

18

No. 4867

SUPERINTENDING ENGINEER'S OFFICE,
V CIRCLE, MADRAS,
Chepâk, 18th February 1888.
Despd 21st

From

Colonel A. M. Vibart R.E.
SUPERINTENDING ENGINEER,
V CIRCLE,

To

THE

Chief Engineer
P. W. Department

SIR,

I have the honor to submit for sanction and an appropriation of funds a Plan and Estimate of Rs 2780 for constructing a Racquet Court at Government House Madras.

The Estimate has been approved by the Military Secretary to His Excellency the Governor, and the work has been put in hand in anticipation of sanction of the Estimate.

Enclosures 5
1 Estimate
2. Plans.
1 Specification
1 Copy of Estimate

I have the honor to be
Sir,
Your most obedt servt
A. M. Vibart Coll. R.E.
Superintending Engineer
5th Circle

P. W. Dept.

To be returned with reply.

Regr. No. 1120 W.

No. 804 C d/ 24th Feby 1888

Referred back to the Suptg. Engineer V circle for favour of early report as to the amount absolutely necessary for expenditure on the work during the current official year.

2. The allotments already made this year for original works at Government House, Madras amount to Rs 14660, and any expenditure in excess of Rs 15,000 will be beyond the sanctioning power of this Government - vide - Code para 1540.

(By order)

W. C. Baddeley
Capt R.E.
Under Secy. to Govt P. W. D.

E.1

PWC No ~~1703~~ 1914/88

From

THE SUPERINTENDING ENGINEER,
V CIRCLE,

To

THE Chief Engineer
P.W. Department.

Dated 18th } February 1888.
Recd. 21 }

ENCLOSURES. ~~5~~ +6

(+2 plans)

No. 867 C d/ 1-3-88

No. 4867.

Racquet Court at Government House Madras.
Submits for sanction an estimate of Rs 2780 for constructing a ——

No. 5042

SUPERINTENDING ENGINEER'S OFFICE,
V Circle, Madras,
Chepák, 27th February 188~~7~~8.

From

Colonel H. M. Vibart R.E.
SUPERINTENDING ENGINEER, V CIRCLE,

To

THE Chief Engineer
P. W. Department

SIR,

Enclosures. 1

1 Endorsement with enclosures.

With reference to your Endorsement No. 804 C dated 24th February 1888 herewith returned, I have the honor to report that the following new works connected with Government House at Madras, have been completed and the expenditures incurred up to end of January amounts to Rs 18624.

Names of Works	Amount of Estimate	Existing grant	Expenditure up to the end of January 1888
Madras Government House - Aide-de-Camps Quarters Improvements	13100	10500	12665
Construction of Swimming bath	4160	4160	3534
Construction of Racquet Court	2780	0	2425
	20,040	14660	18624

The excess outlay over Rs 15000 might be treated as objectionable in the Statement of Objectionable Items till the next official year when the balance of funds required may be allatted.

I have the honor to be
Sir
Your most obedt. servt.

A. Milne

for Superintending Engineer
5th Circle
Absent on duty

My

P.W.C. No. 1914

No. 5042.

From

The Supg Engr
5th Circle

To

The Chief Engineer
P.W. Deptt.

Dated 27
Recd 28 } February
1888.

No. 867 C d/ 1st March 1888
(+ 2 plans)

Government House Madras

—

Reports that certain original Works connected with — have been completed.

SAW

Recd Re/ No. 867 C d/ 1st March 1888

2/5

Plsd

4 P

Memo.

With reference to his letter No. 5042 dated 27 Feby 1888, the S.E. V Circle is requested to submit an explanation of his action in incurring expenditure in excess of Rs 15,000 on new works connected with Govt House Madras, as under para 1540 of the P.W. Code, that limit cannot be exceeded without the sanction of the Govt of India

29.2.88

29/2/88

S.E. V Circle

1/3/88

No. 804 C d/ 24-2-88
" 408 C " 9-1-88
" 4427 C " 2-12-87
" 3557 C " 18-10-87
" 3244 W " 28-11-87
" 3627 C " 21-10-87
" 320 D " 11-7-87
" 1802 W " 6-7-87
" 1679 W " 23-6-87
" 1243 W " 7-5-87
" 446 W " 7-2-88
" 3166 W " 22-11-87

26

No. 867 C d/ 1st March 1888

1/3

KEEP-WITH Genl. No.

dated 188 .

1,000—7-2-88.

27

[C. No. 8.]

GOVT. OF MADRAS. } 1888. 58 { P.W. DEPT.

EXAMINER, P. W. ACCOUNTS.

Madras, 24 March 1888.

Office Note No. 1265

To

W.

I beg to bring to your notice, that the Executive Engineer Presidency Division in reply to a reference made by this office states that the outlay during the current official year against the several estimates, sanctioned under original works, in connection with the Government House at Madras, will exceed Rs. 15,000. Under these circumstances I beg to point out that the sanction of the Government of India should be obtained to the same, as required by Code para 1540.

2. The outlay on the several works to the end of January 1888 as booked in this office aggregates Rs. 14,839 as detailed below:-

PWC No 2915

below:-

	Estimate	Outlay during the year to end of January 1888.
	Rs.	Rs.
1 Government House Madras Constructing a swimming bath....................	4,160	1,316
2 —— do —— Improvements to Aid-de-Camps' bungalow...	13,100	12,665
3 —— do —— Building a Racquet Court............	nil	830
4 —— do —— Raising screen walls of the stalls of stables....................	100	16
5 —— do —— Additions and alterations to Kitchens....	244	12
	Total outlay	14,839

(14)

C.

24/3

Rg 26.3.88

Await reply to Mo 867 C 21-3-88 Reminder to S.E. V circle to issue

27.3.88

Read

29

68

No. 5564.

Superintending Engineers Office
5th Circle Madras.
Bangalore 29 March 1888

From,
Colonel A. M. Tibart R.E.,
Superintending Engineer
5th Circle

To,
The Chief Engineer
P. W. Department

Sir,

With reference to your Memo No 867 C dated 1st March 1888 I have the honor to state that the Improvements to Aide-de-Camps Bungalow and the Construction of Swimming Bath at Government House at Madras had to be carried out on emergency as it was understood that His Excellency the Governor was particularly desirous that these works should be completed before his return from

from the Hills. The Construction of Racquet Court at Government House Madras was also required to be Carried to Completion with as little delay as possible. The works were therefore pushed on with.

The order restricting expenditure to Rs 15000 a year was overlooked or an application would have been submitted in due time for sanction to expenditure being incurred in excess of that amount. As the accounts of the year are not closed till the 20th April; I request that, if not too late, the necessary sanction of the Government of India may now be obtained for the outlay in excess of Rs 15000. The total expenditure on the above works to end of March amounts to Rs 18979 — the excess is Rs 3979.

I have the honor to be
Sir,
Your most obedt. servt.

Colt. RE
Superintending Engineer
5th Circle

No. 867 C d/ 1-3.88
" 446 W d/ 7.2.88.
" 804 C d/ 24-2.88.
3166 W d/ 22.11.87
" 4427 C d/ 2-12-87.
" 3557 C d/ 18.10.87
" 3244 W d/ 28.11.87
" 3627 C d/ 21-10.87
" 320 D d/ 11.7.87
" 1802 W d/ 6-7-87
" 1679 W d/ 23.6-87
" 1248 W d/ 7-5-87

0 v.L.5 $\frac{38}{1r}$
6/4 1+ ma. 7.4.88 Rd 10.4.88
M. 11.4.88

P.W.C.N. 3121

From

The Superintending Engineer
5th Circle

To

The Chief Engineer
P.W. Department.

Dated 29th } March 1888.
Rd 4.4.88

No. 5564.

Government House
Madras ——

Reports why the expenditure on works at the —— exceeded Rs 15,000 and requests that the sanction of the Government of India may now be obtained for the excess.

---

32 No. 114 C.W.

B

PUBLIC WORKS DEPARTMENT.

78

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the 14th April 188

READ the following

From the Supdg. Engr. V. Circle.	H.E. No. 4867 d/ 18th Feby 1888
Endorsement to the —do——	" No. 804 C d/ 24th Feby 1888
From the —do —— do——	" No. 5042 d/ 27th Feby 1888
Memo to the —do —— do——	" No. 867 C d/ 1st March 1888
Office Note from the Ex. Md.	" No. 1265 d/ 24th March 1888
From the Supdg. Engr. V Circle	" No. 5564 d/ 29th March 1888

Ordered that the foregoing correspondence be forwarded to the Govt. of India with request that sanction* be accorded to the expenditure of Rs. 18,979 incurred on new works at Government House, Madras.

2. The Supdg. Engineer will see that para 1540 of the P.W. Code is not again overlooked – [illegible] work is begun – future [illegible] sanctioned by Govt.

H.E.

*vide para 1540 of the Madras P.W. Code.

A.L. No. 1127 w.d. 14th April 18

Forwarded to the Government of India.

6.4.88

7/4/88

Despd 16/4/88

Nos. 1126/1127 w. d/14th April 1888

[illegible]

Despd 16/4

To

The Supdg. Engr: V Circle

" Exr. P.W.dept.

O.L.S 38/15

O/C, Ar. on 7.4.88. Rd. 10.4.88

M. 11.4.88.

---

[25]

Marine Department.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

Read the following paper

From the Port Officer, Madras, dd 8th Mar 1888, No. G/102, re: the provision of an official residence for the Assistant Port Officer.

* * *

* * *

3. I think that a portion of the Port Office might be utilized for the purp and I beg that should Government concur in my opinion, the Public Works Department may be communicated with on the subje and desired to inspect the Port Office and report as to the feasibility of converti a portion of it into an officer's residence for the Assistant Port Officer, and if this is not possible, as to any other site, which might be available for this purpose in the neighbourhood of the harbour.

Order,

Order, d/ 31st March 1888, No. 112.

The Government in the Marine Department approve the Port Officer's suggestions, and will request the Public Works Department to arrange for the inspection and report suggested in para 3.

(True Extract)

Under Secretary to Govt., P.W.D.
for Chief Secy:—

To

The Port Officer, Madras.
" Public Works Department. ✓

B. No. 1125 W. d/14th April 1888

Communicated to the S.E.V. Circle for early report

Communicated to the S.E.V. Circle for early report

Wem
9.4.88

Joh
11/4/88

P. W.
11/4

S.E.V.C.

S. E. V. Circle

J.D.
16/4

0
9/4

O.A.S. 54/IV

m. 11.4/88

JD
9/4

[6] P.W.C. No. 3

Gobt. of 188 Mad

To

P. W. D.

R. 9. 4. 88

Proceedings, dated 31 March 1888
No. 112

No. 1125 W. d/ 14-4-18

Subject.

Approving the Port-Officer's suggestions regarding the provision of an official residence for the Assistant Port-Officer.

With the order.

27 OCT 87

Off: 296 of 7-9-88

PLAN
OF A
RACQUET COURT
FOR
GOVT. HOUSE MADRAS

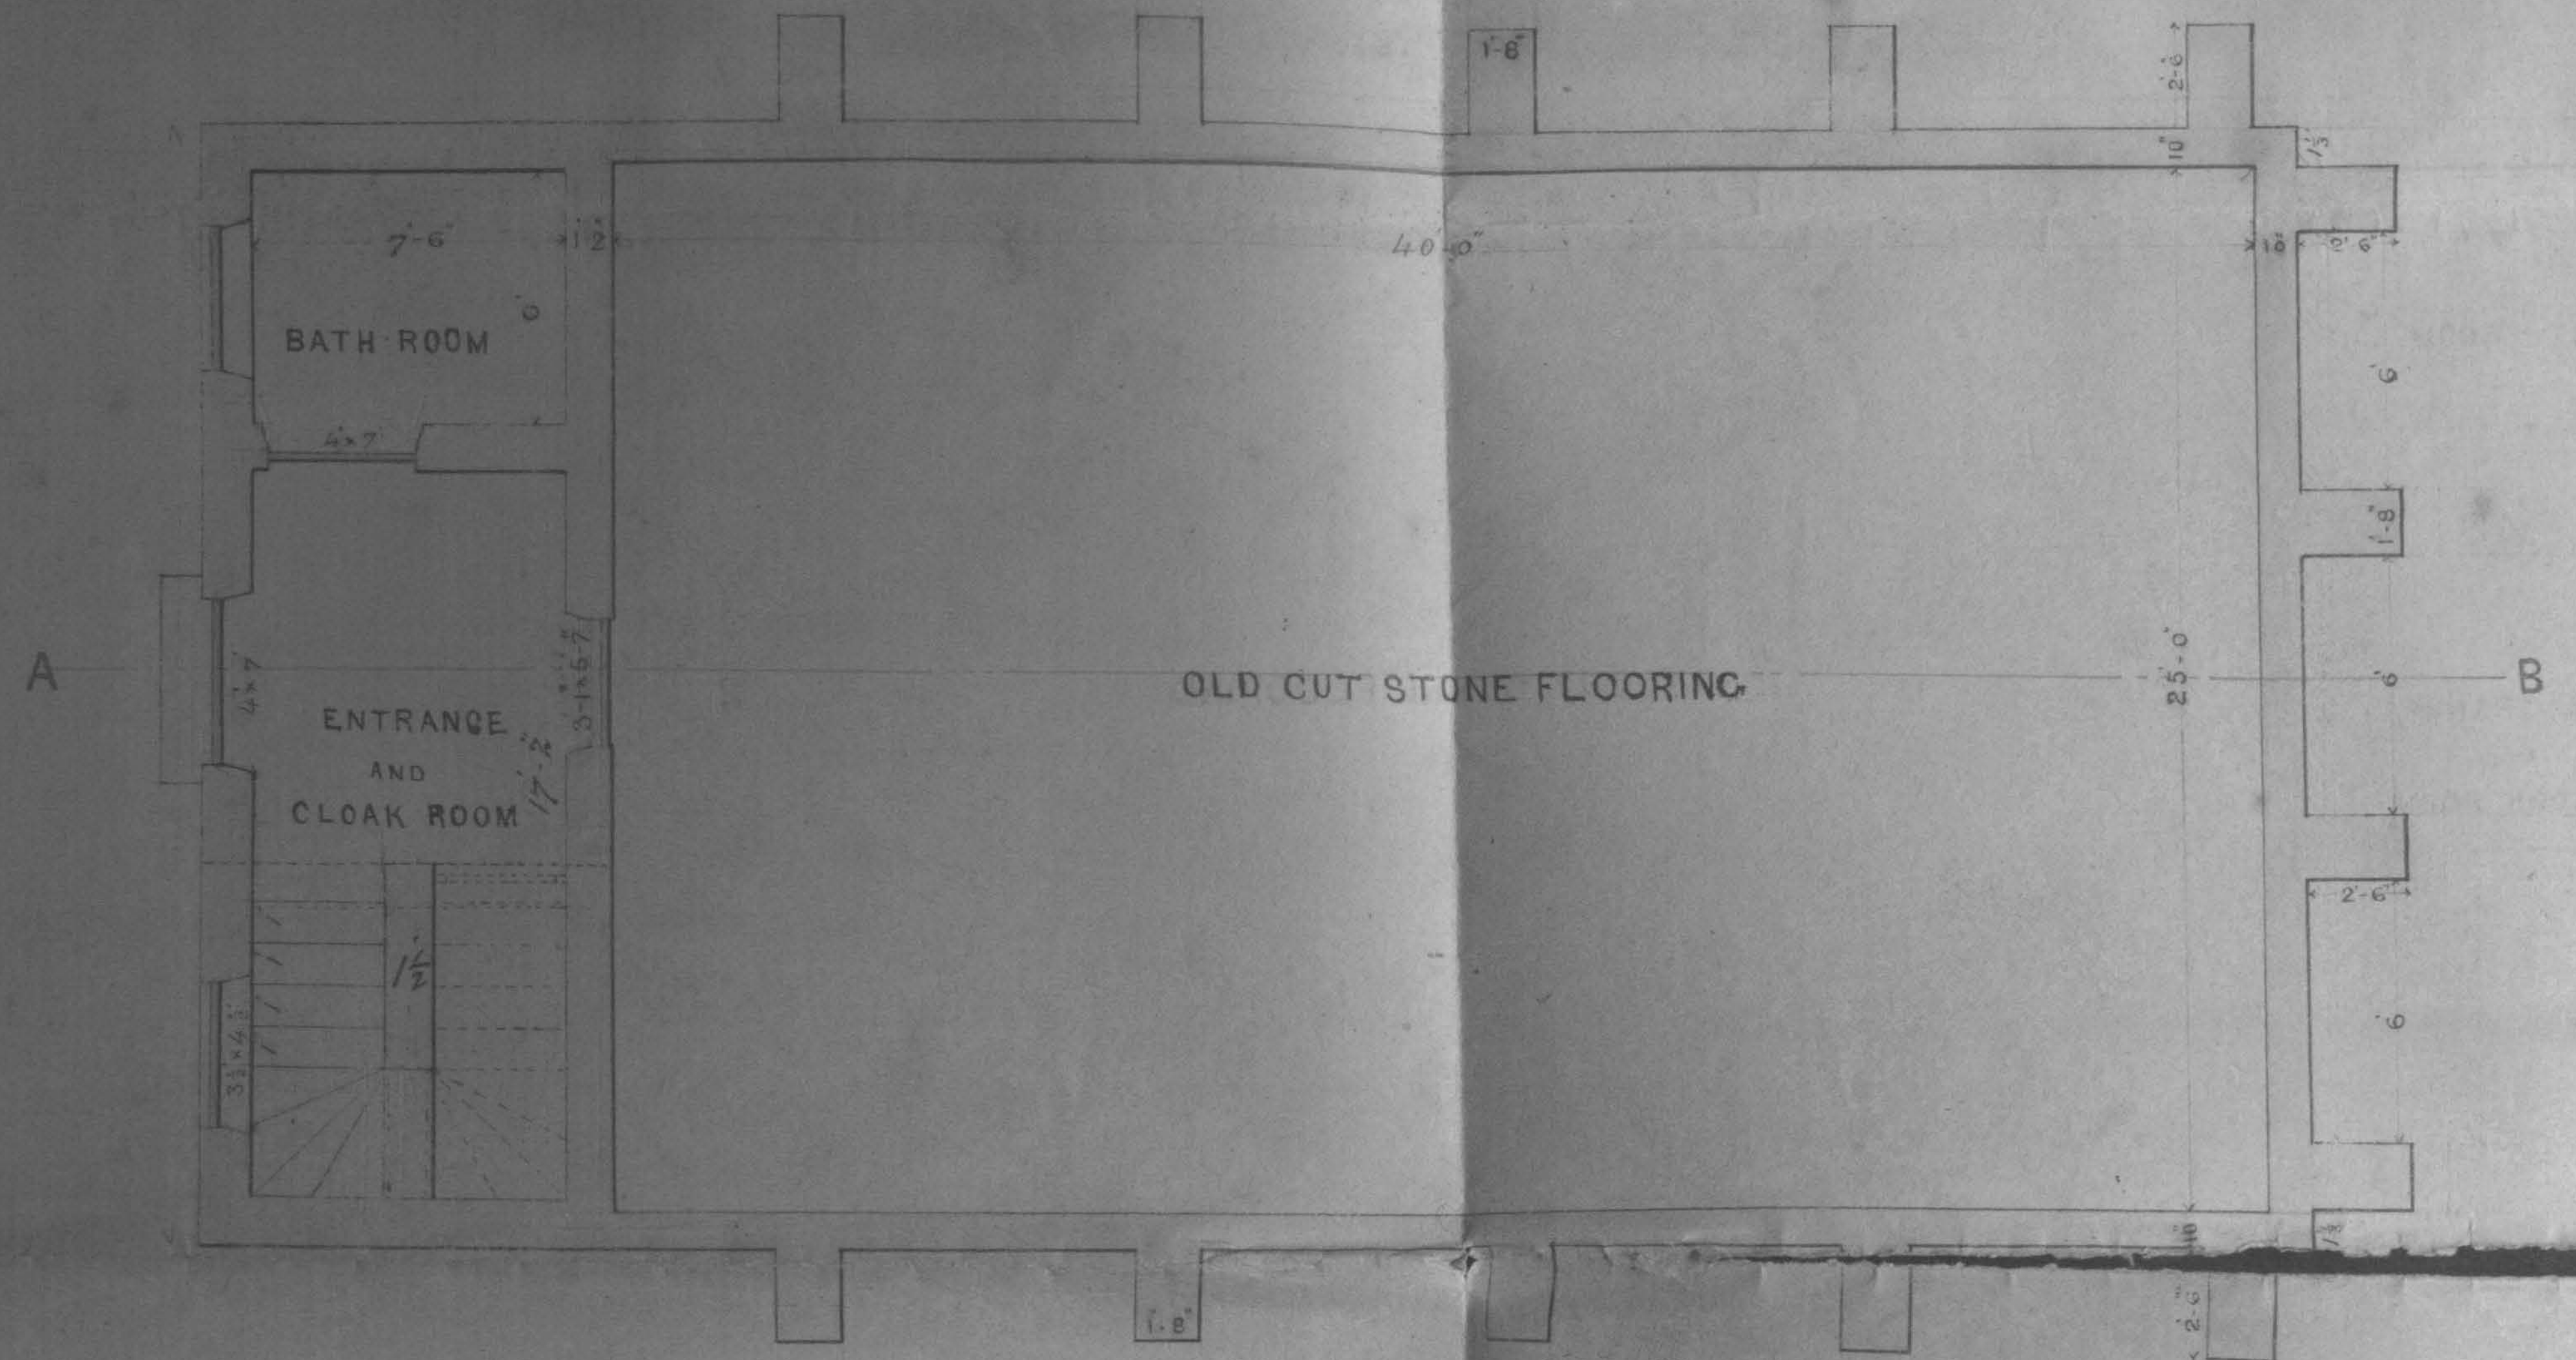

SECTION ON A·B

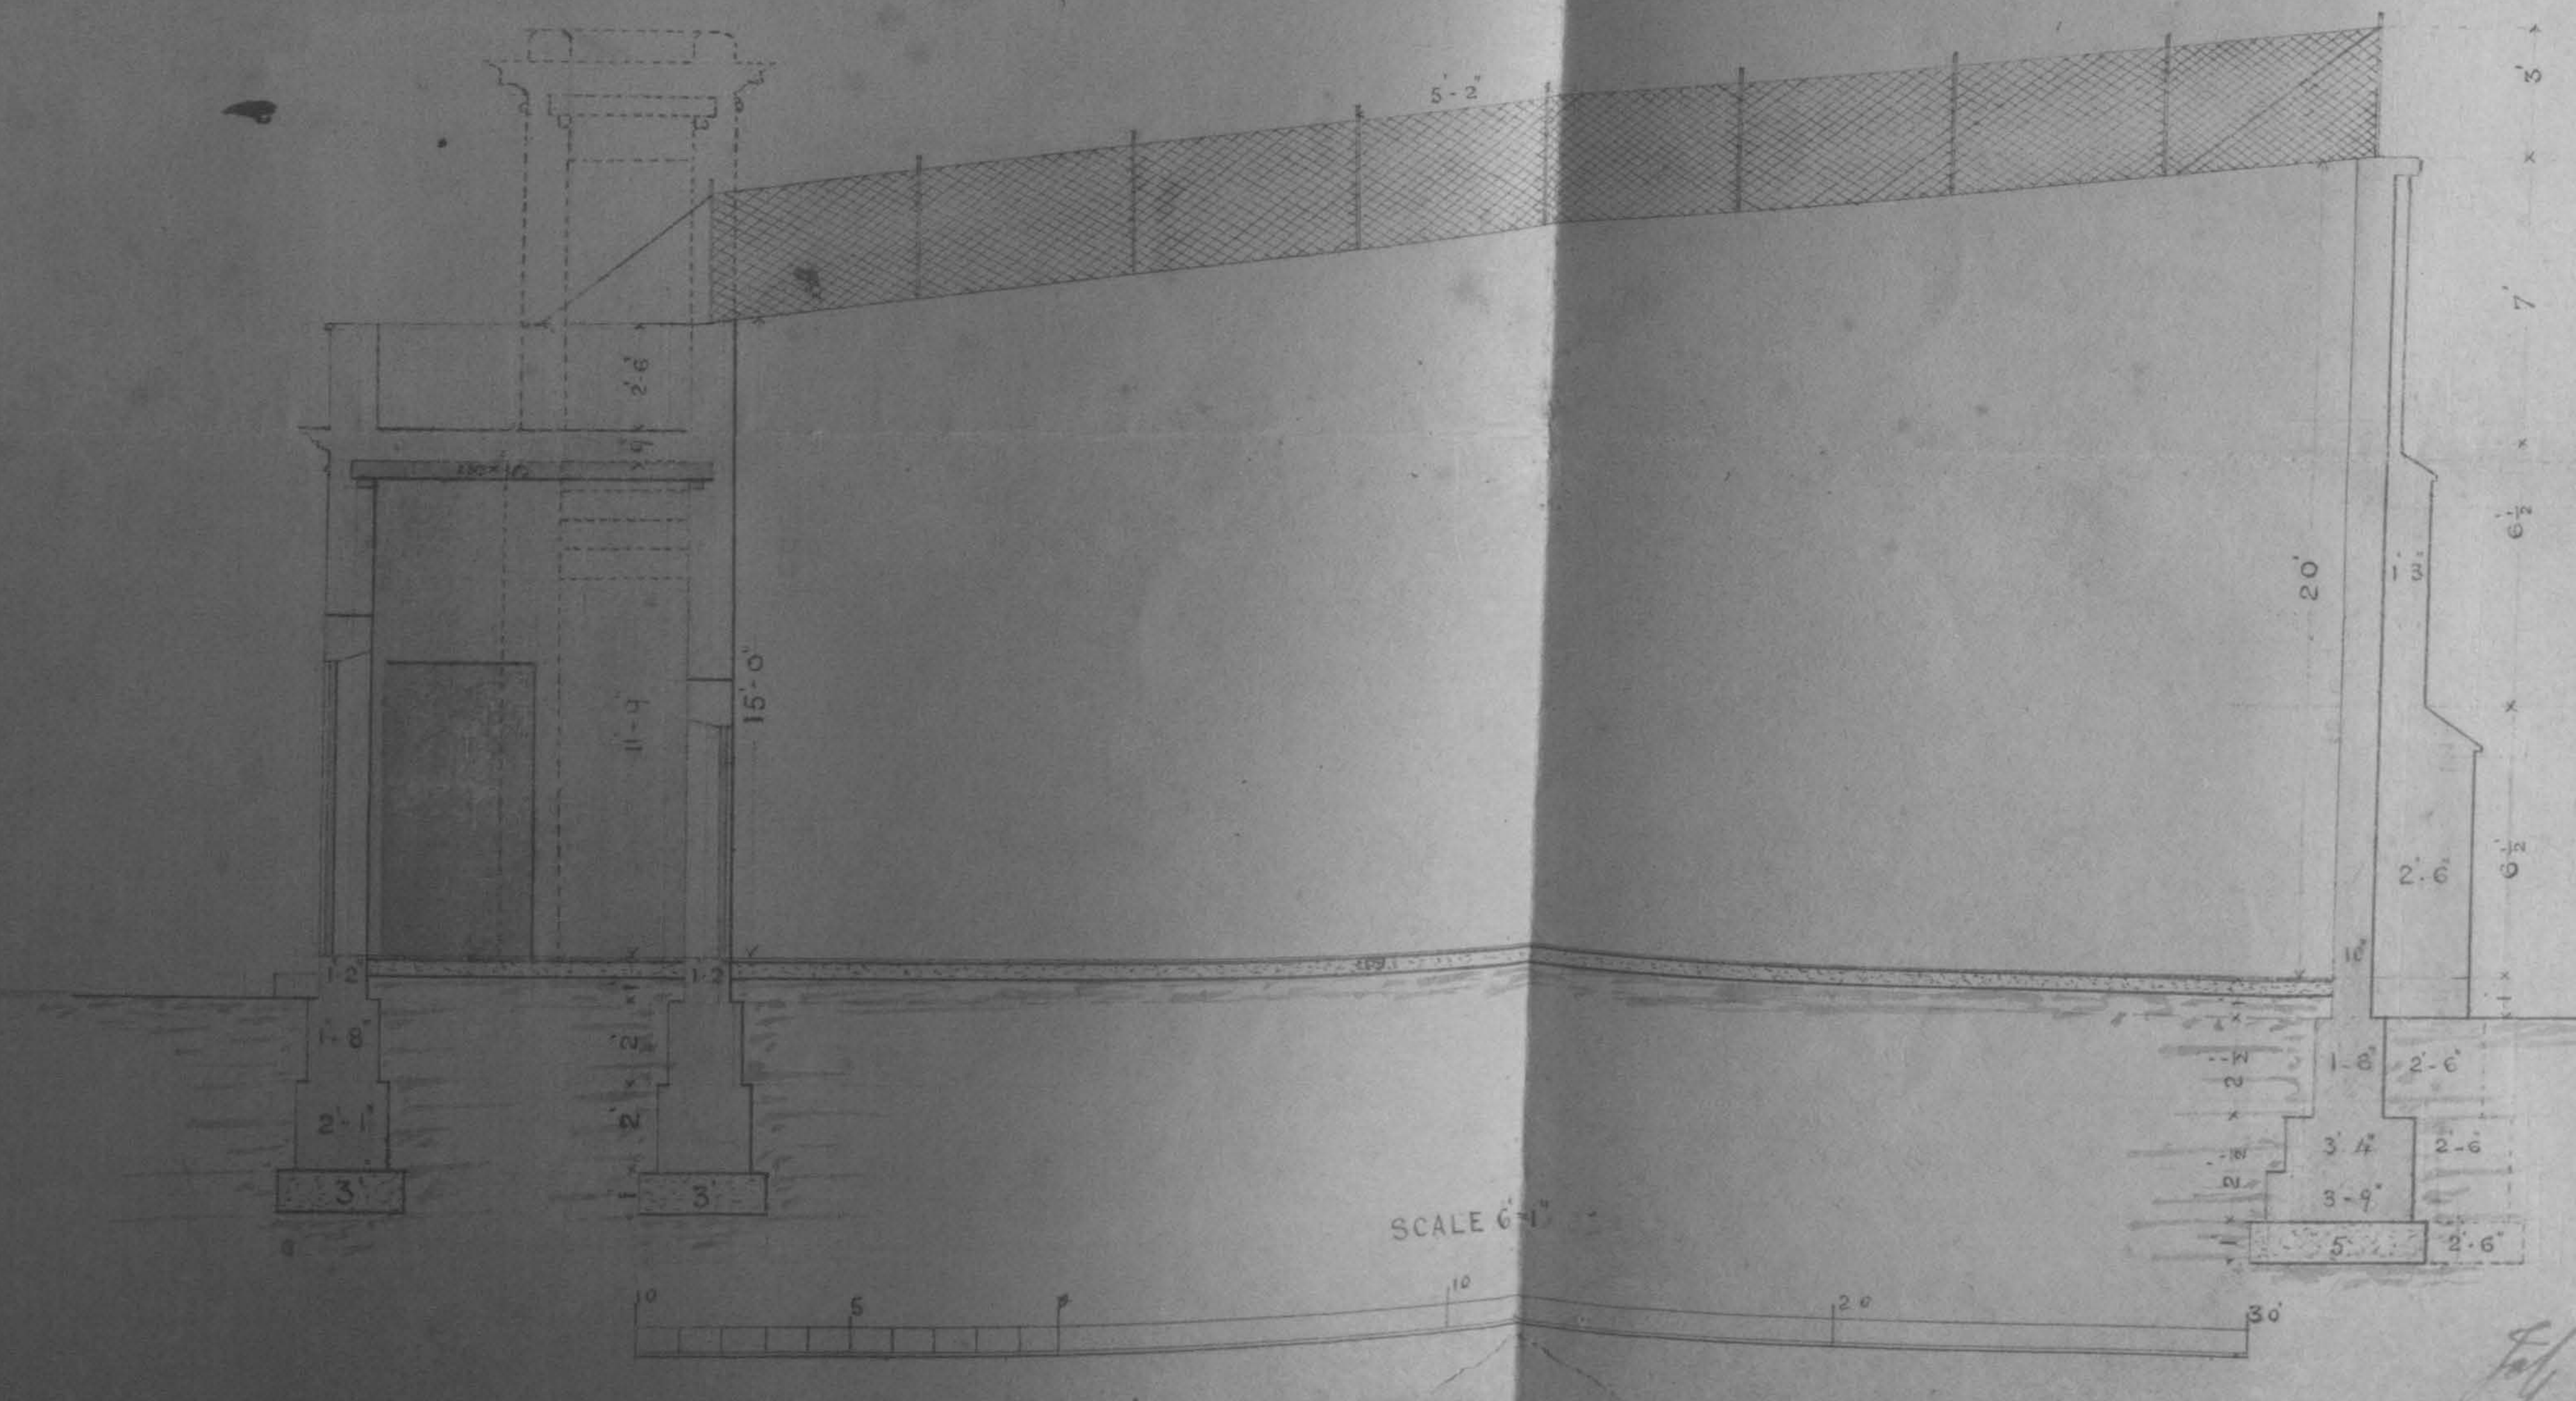

CHEPAUK 20th OCT 87

Bangalore 16 November 1887

Amount of Estimate Rs. ~~2735~~ 2780

Col. R.E.
Superintg: Engineer: V Circle.

24th Oct.
1887

A. [illegible] Contractor
Sub-Engineer

SUB Dt. OFFICER CIVIL WORKS

Colonel R.E.
Executive Engineer Pres. Dn.