(1) பக்கங்களின் எண்ணிக்கை 30

(2) புதுக்கித் திருப்பிய நாள் Oct 89

(3) ஆதாரங்குறிப்பவர் சுருக்கொப்பம்

தமிழ்நாடு ஆவணக் காப்பகம்.

72

தமிழ்நாடு அரசு

P. W. D. துறை

அரசாணை எண்.
மு. கோப்புத் தாள் எண். 2032

அச்சகம்
பலவகை

நாள் : 29 · 7 - 1889 ~~198~~ .

மடிக்கவோ கண்டபடி கையாளவோ கூடாது

[illegible]

Sheet no 8 + 9 Statement

15. Sheets
3
12

Sheet no 15 [illegible]
12 + 9 ([illegible])

ஆவண, கா-1—18,006—15-6-87.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

2032

Buildings and Roads.
Civil Works.

Read—the following paper :—

Proceedings of the Board of Revenue (Land Revenue), dated 15th May 1889, Mis. No. 2884.

The Hon. J. Grose, M.A.

Read—the following letter from the Collector of Tanjore, to the Secretary to the Commissioners of Land Revenue, dated 15th February 1889, No. 112.

I have the honor to forward herewith an estimate (received from the Superintending Engineer, VI Circle), amounting to Rs. 3,410, for providing iron record-racks for the Máyavaram taluk cutcherry, and request that the Board will be pleased to obtain sanction of Government for the same.

Reference on the above to the Collector, dated 26th February 1889.

The Collector is requested to report how he proposes to meet the cost.

Read—the following letter from the same officer, dated 26th March 1889, No. 187.

In reference to Board's reference on Sub-Register No. 423 of 1889, dated 26th February last, I have the honor to forward copy of letter from the Superintending Engineer, VI Circle, No. 2574 T.J., dated 8th March 1889, from which it will be seen that no provision has been made in the Public Works Department budget for the cost of record-racks for the Máyavaram taluk cutcherry.

2. I beg that the Board will be pleased to move Government to provide for the work in the final issue of the Civil Works budget for 1889-90.

Reference on the above to the Collector, dated 12th April 1889.

The Collector is requested to report when the record-room will be ready for the racks he proposes to put up.

Read—the following letter from the same officer, dated 26th April 1889, No. 251.

In reply to Board's reference, dated 12th April 1889, on Sub-Register No. 423 (General Register No. 951) of 1889, I have the honor to report that the record-room of the Máyavaram taluk cutcherry is now ready for the racks proposed to be put up.

Resolution—dated 15th May 1889, Mis. No. 2884.

Submitted for the orders of Government.

2. The Collector of Tanjore requests that the taluk office at Máyavaram be supplied with thirteen iron record-racks and two ladders at a cost of Rs. 3,410. The Superintending Engineer reports that he has no funds at his disposal from which the charge can be met, but suggests that, if the supply is urgent, the Government may be moved to make the requisite provision in the final issue of the budget. The Board request that funds be provided accordingly, as it appears that the new taluk office is now ready for the proposed racks to be put up. It will be probably more economical to place iron racks in the taluk cutcherry than wooden ones. Once put up they will last as long as the building.

(True Copies and Extract.)

(Signed) M. HAMMICK,
Secretary.

Endorsement No. 3750, Revenue.

Approved and transferred to the Public Works Department for the provision of the necessary funds.

Ootacamund,
17th June 1889.

(Signed) C. A. GALTON,
Secretary to Government.

Order—dated 29th July 1889, No. 2032 W., Public Works.

The Government considers the plan of iron record-racks, circulated with G.O., No. 1098 W., dated 12th April 1888, which was designed expressly for court records, is unsuitable for taluk records, which are usually contained in large bundles. The iron racks are, moreover, far more expensive than wooden racks. The latter should accordingly be provided for taluk offices. A type-plan, with specification and quantities, will, in due course, be prepared by the Chief Engineer and issued for guidance.

2. A plan, with approximate estimate amounting to Rs. 625, for wooden racks to be put up in the taluk office at Máyavaram, is forwarded to the Superintending Engineer for adoption, in lieu of the plan and estimate, amounting to Rs. 3,410, already submitted.

3. The Superintending Engineer will propose a reappropriation of funds to admit of the work being carried out in the current official year.

(True Extract.)

Captain, R.E.,
Under-Secy. to Govt., P.W.D.

To the Chief Engineer, Public Works Department.
„ Superintending Engineer, VI Circle, with enclosures.
„ other Superintending Engineers, with extract para. 1.
„ Revenue Department.

Exd. J. Henricus.
Spare Copies

2032

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1889} Madras.

PUBLIC WORKS.

Dated July, 29th.

Recd. *Encl.*

G.O., 29th July 1889, No. 2032 W.

JULY.

Record Racks

Provision of wooden instead of iron — for taluk offices directed, and a plan and approximate estimate for wooden racks for the Máyavaram office forwarded to the Superintending Engineer, VI Circle, for adoption.

29th July 1889, No. 2032 W., Public Works.

2032

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

Read—the following paper:—

Proceedings of the Board of Revenue (Land Revenue), dated 15th May 1899, Mis. No. 2884.
Endorsement thereon in the Revenue Department, dated 17th June 1889, No. 3750.

Order—dated 29th July 1889, No. 2032 W., Public Works.

The Government considers the plan of iron record-racks, circulated with G.O., No. 1098 W., dated 12th April 1888, which was designed expressly for court records, is unsuitable for taluk records, which are usually contained in large bundles. The iron racks are, moreover, far more expensive than wooden racks. The latter should accordingly be provided for taluk offices. A type-plan, with specification and quantities, will, in due course, be prepared by the Chief Engineer and issued for guidance.

* * * * * *

(True Extract.)

Captain, R.E.,
Under-Secy. to Govt., P.W.D.

To the Chief Engineer, Public Works Department.
" Superintending Engineer, VI Circle, with enclosures.
" other Superintending Engineers.
" Revenue Department.

3

Exd. J. Henricus.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1889} Madras.

PUBLIC WORKS.

Dated July, 29th.

Recd. *Encl.*

G.O., 29th July 1889, No. 2032 W.

JULY.

Record Racks

Provision of wooden instead of iron — for taluk offices directed, and a plan and approximate estimate for wooden racks for the Máyavaram office forwarded to the Superintending Engineer, VI Circle, for adoption.

12th April 1888, No. 1098 W., Public Works.

2032

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

Read—the following letter from A. JOYCE, Esq., General Superintendent, Public Works Workshops, to the Deputy Chief Engineer, Public Works Department, dated Madras, 23rd February 1888, No. 2751 W.:—

With reference to your memorandum, No. 651 C., dated 14th February 1888, and in continuation of my letter, No. 2748 W., dated 22nd idem, I have the honor to enclose standard plan and revised estimate for iron record-racks for record-rooms.

Order—dated 12th April 1888, No. 1098 W., Public Works.

The standard plan for iron record-racks for record-rooms, as finally approved, will be lithographed, and the revised specification and estimates will be printed and circulated to officers and departments concerned, for information and guidance, in continuation of G.O., No. 2391 W., dated 5th September 1887.

(True Extract.)

(Signed) J. O. HASTED Colonel, R.E.,
Secretaryto Govt., P.W.D.

To Superintending Engineers,
To the Chief Engineer for Irrigation, } with copies of plan and estimates.
„ Consulting Engineer for Railways,
„ Examiner, Public Works Accounts,
„ Consulting Architect to Government,
„ Judicial Department,
„ Revenue „
„ Mily. Deptt

Exd. J. Moses.
Spare Copies

2032

ANNEXURE.

Estimate Form—Abstract.

Quantity.	Description of work.	Rate.			Per	Amount.	Total.
	Wooden Ladder, measuring 10′ × 1½′.	RS.	A.	P.		RS.	RS.
¾ cub. ft.	of Tricanamalley wood	3	8	0	cub. ft.	3	
16 lb.	of iron	0	1	0	lb.	1	
...	Carpenter's labor	...			...	3	
...	Filers and Smiths, &c.	...			...	3	
...	Painting, Chuckler's labor including leather	...			...	1	
	Total ...	...			...	11	
	General charges at 10 per cent. ...	...			...	1	
	Total amount of Estimate ...	...			...	...	12
	Grand Total of Estimate ...	...			...	...	12

Seven Wells,
23rd February 1888.

(Signed) A. JOYCE,
Genl. Supt., P.W. Workshops and Stores.

ESTIMATE FORM—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
Record Racks, measuring 6′ × 2½′ × 9¾′.					LB.	LB.
Wrought-iron work—						
Angle iron for standards ...	4	9′ 9″	0′ 2″	0′ ¼″	130	
Do. for crosses ...	32	3′ 0″	0′ 1¼″	0′ ¼″	192	
Do. for ties ...	8	6′ 0″	0′ 1¼″	0′ ¼″	96	
Do. for holding ...	6	0′ 4″	0′ 3″	0′ ⅜″	15	
T iron for centre of standards ...	2	9′ 9″	0′ 2″ × 1″ × ¼″		49	
Do. for crosses ...	16	3′ 0″	0′ 2″ × 1″ × ¼″		120	
Bolts, holding	6	1′ 6″	0′ 1″ Dr.		24	
Wall plates	3	6′ 6″	0′ 4″	0′ ⅜″	98	
Wastage	...	...	...	...	33	
Total lb. of wrought-iron work.	...	...	...	...	...	757
Sweedish iron for revets and bolts	...	...	...	...	...	50
Castings	...	...	...	...	...	220
Teak-wood work—						
Battens	150	6′ 0″	0′ 1½″	0′ 1¼″	11′ 8″ 7‴	
Do. below	60	2′ 6″	0′ 1½″	0′ ½″	0′ 9″ 0‴	
Plank top	1	6′ 0″	2′ 6″	0′ ½″	0′ 7″ 6‴	
Total cub. ft. of teak-wood work.	...	...	...	...	...	13′ 1″ 1‴

ESTIMATE FORM—Abstract.

Quantity.	Description of work.	Rate.	Per	Amount.	Total.
	Record Racks, measuring 6′ × 2½′ × 9¾′.	RS. A. P.		RS.	RS.
757 lb.	of wrought-iron work	0 1 3	lb.	59	
50 „	of Sweedish iron	0 2 0	„	6	
220 „	of castings	0 0 10	„	11	
13 cub. ft.	of teak-wood work	2 0 0	cub. ft.	26	
...	Wood screws	...	...	3	
...	Painting	...	...	3	
...	Fuel	...	...	5	
...	Smith's labor	...	...	20	
...	Filers	...	...	8	
...	Machine men	...	..	6	
...	Carpenters	...	...	10	
...	Bricklayer's labor including materials	...	...	3	
	Total ...	...	...	160	
	General charges at 10 per cent. ...	...	...	16	
	Total amount of Estimate ..	...	...	...	176
	Grand Total of Estimate ...	...	...	...	176

SEVEN WELLS,
March 1888.

(Signed) A. JOYCE,
Genl. Supt., P.W. Workshops and Stores.

9D 37

ESTIMATE FORM—Detail Measurements.

Detail of Work.	Number.	Measurements in Feet.			Area or contents.	Total quantity of each description of work.
		Length.	Breadth.	Depth.		
Record Racks, measuring 6′ × 1¼′ × 12′.					LB.	LB.
Wrought-iron work—						
Angle iron for standards...	4	12′ 0″	0′ 2″	0′ ¼″	161	
Do. for crosses ...	40	1′ 9″	0′ 1¼″	0′ ¼″	140	
Do. for ties ...	10	6′ 0″	0′ 1¼″	0′ ¼″	120	
Do. for holding ...	6	0′ 4″	0′ 3″	0′ ⅜″	15	
T iron for centre standards ...	2	12′ 0″	2″ × 1″ × ¼″		60	
Do. for crosses ...	20	1′ 9″	2″ × 1″ × ¼″		88	
Bolts, holding	6	1′ 6″	0′ 1″ Dr.		24	
Wall plates	3	6′ 6″	0′ 4″	0′ ⅜″	98	
Wastage	...	...	...	...	38	
Total lb. of wrought-iron work.	...	...	...	...	...	744
Sweedish iron for revets and bolts	...	...	...	...	...	60
Castings	...	...	...	...	...	220
Teak-wood work—						
Battens	95	6′ 0″	0′ 1½″	0′ 1¼″	7′ 5″ 1‴	
Do. below	76	1′ 3″	0′ 1½″	0′ ½″	0′ 6″ 0‴	
Plank top	1	6′ 0″	1′ 3″	0′ ½″	0′ 3″ 9‴	
Total cub. ft. of teak-wood work.	...	...	...	...	...	8′ 2″ 10″

ESTIMATE FORM—Abstract.

Quantity.	Description of work.	Rate.	Per	Amount.	Total.
	Record Racks, measuring 6′ × 1¼′ × 12′.	RS. A. P.		RS.	RS.
744 lbs.	of wrought-iron work	0 1 3	lb.	58	
60 „	of Sweedish iron	0 2 0	„	7	
220 „	of castings	0 0 10	„	11	
8¼ cub. ft.	of teak-wood work	2 0 0	cub. ft.	17	
...	Wood screws	...	...	3	
...	Painting	...	...	3	
...	Fuel	...	...	6	
...	Smith's labor	...	.	25	
...	Filers	...	...	9	
...	Machine men	...	...	6	
...	Carpenters	...	...	12	
...	Bricklayer's labor including materials	...	...	4	
	Total ...	...	...	161	
	General charges at 10 per cent. ...	...	...	16	
	Total amount of Estimate ...	...	...	...	177
	Grand Total of Estimate ...	...	...	...	177

SEVEN WELLS,
7th March 1888.

(Signed) A. JOYCE,
Genl. Supt., P.W. Workshops and Stores.

6

Iron Record Racks with Wooden Shelves (Public Works Workshop Specification).

The racks are built of T and L irons bolted together with $\frac{5}{16}$" bolts and nuts.

2. The four corner uprights are angle irons 2" × 2" × $\frac{1}{4}$" to which the horizontal L iron frame pieces are bolted. Each rack has a centre T iron stiffener 2" × 1" × $\frac{1}{4}$" front and back, to which the T iron cross frames are attached.

3. The shelves are frames of teak-wood battens; each frame is in two parts to enable it to be slipped into position easily. The top of each rack is closed with $\frac{1}{2}$" moveable planking.

4. Each rack is provided with 6 cast-iron shoes to take the ends of the uprights as shown in the drawing.

5. When the racks are placed against walls, they are secured by bolts passing through the walls as shown in the drawing.

6. Where there is no adjacent wall, the racks are kept upright by means of tie bars, one arrangement of which is shown in the drawings.

Jl 32

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1888} Madras.

PUBLIC WORKS.

Dated April, 12th.

Recd. *Encl.*

G.O., 12th Apr. 1888, No. 1098 W.

APRIL.

Iron Record Racks

Directing that the standard plan for — for record-rooms, as finally approved, be lithographed, and the revised specification and estimates be printed and circulated to officers and departments concerned.

2032

8

Sheet 11

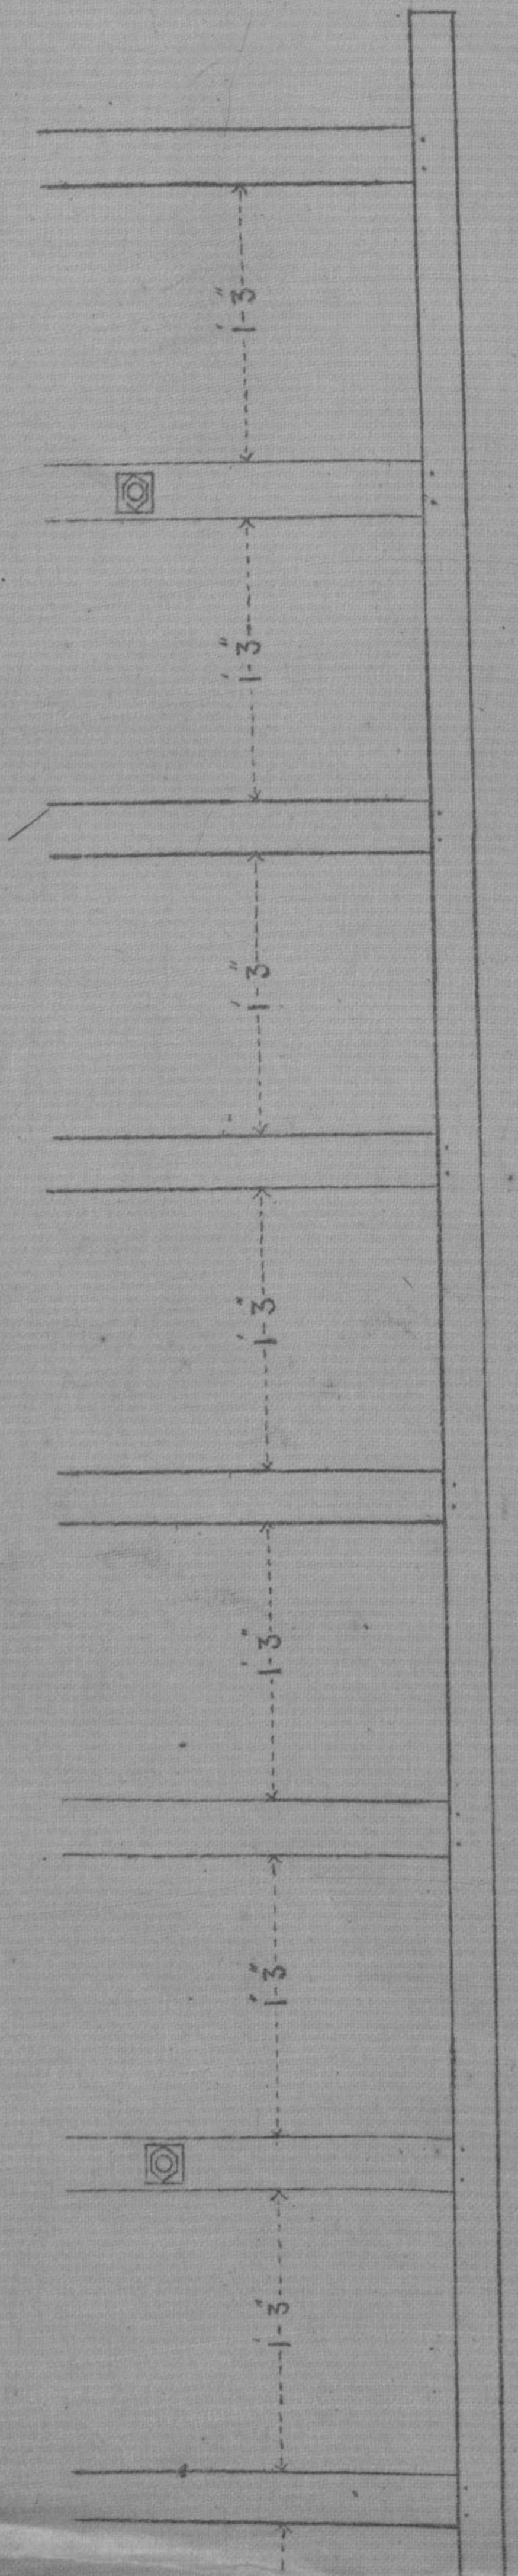
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"

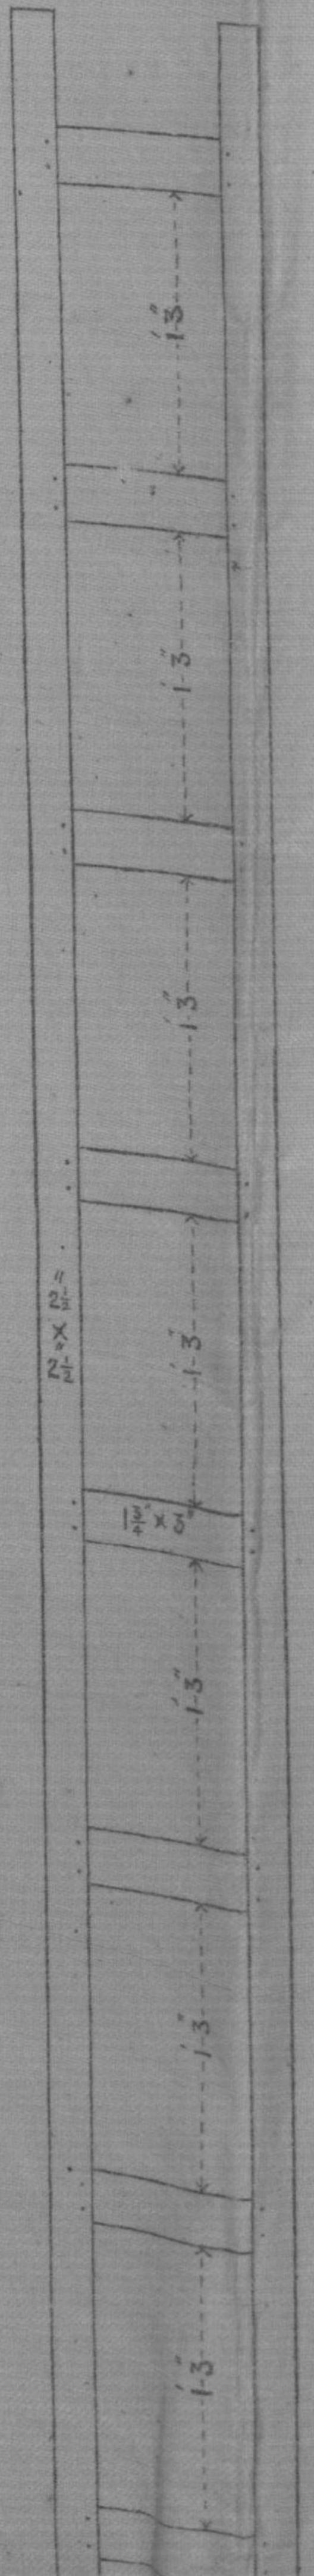
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"

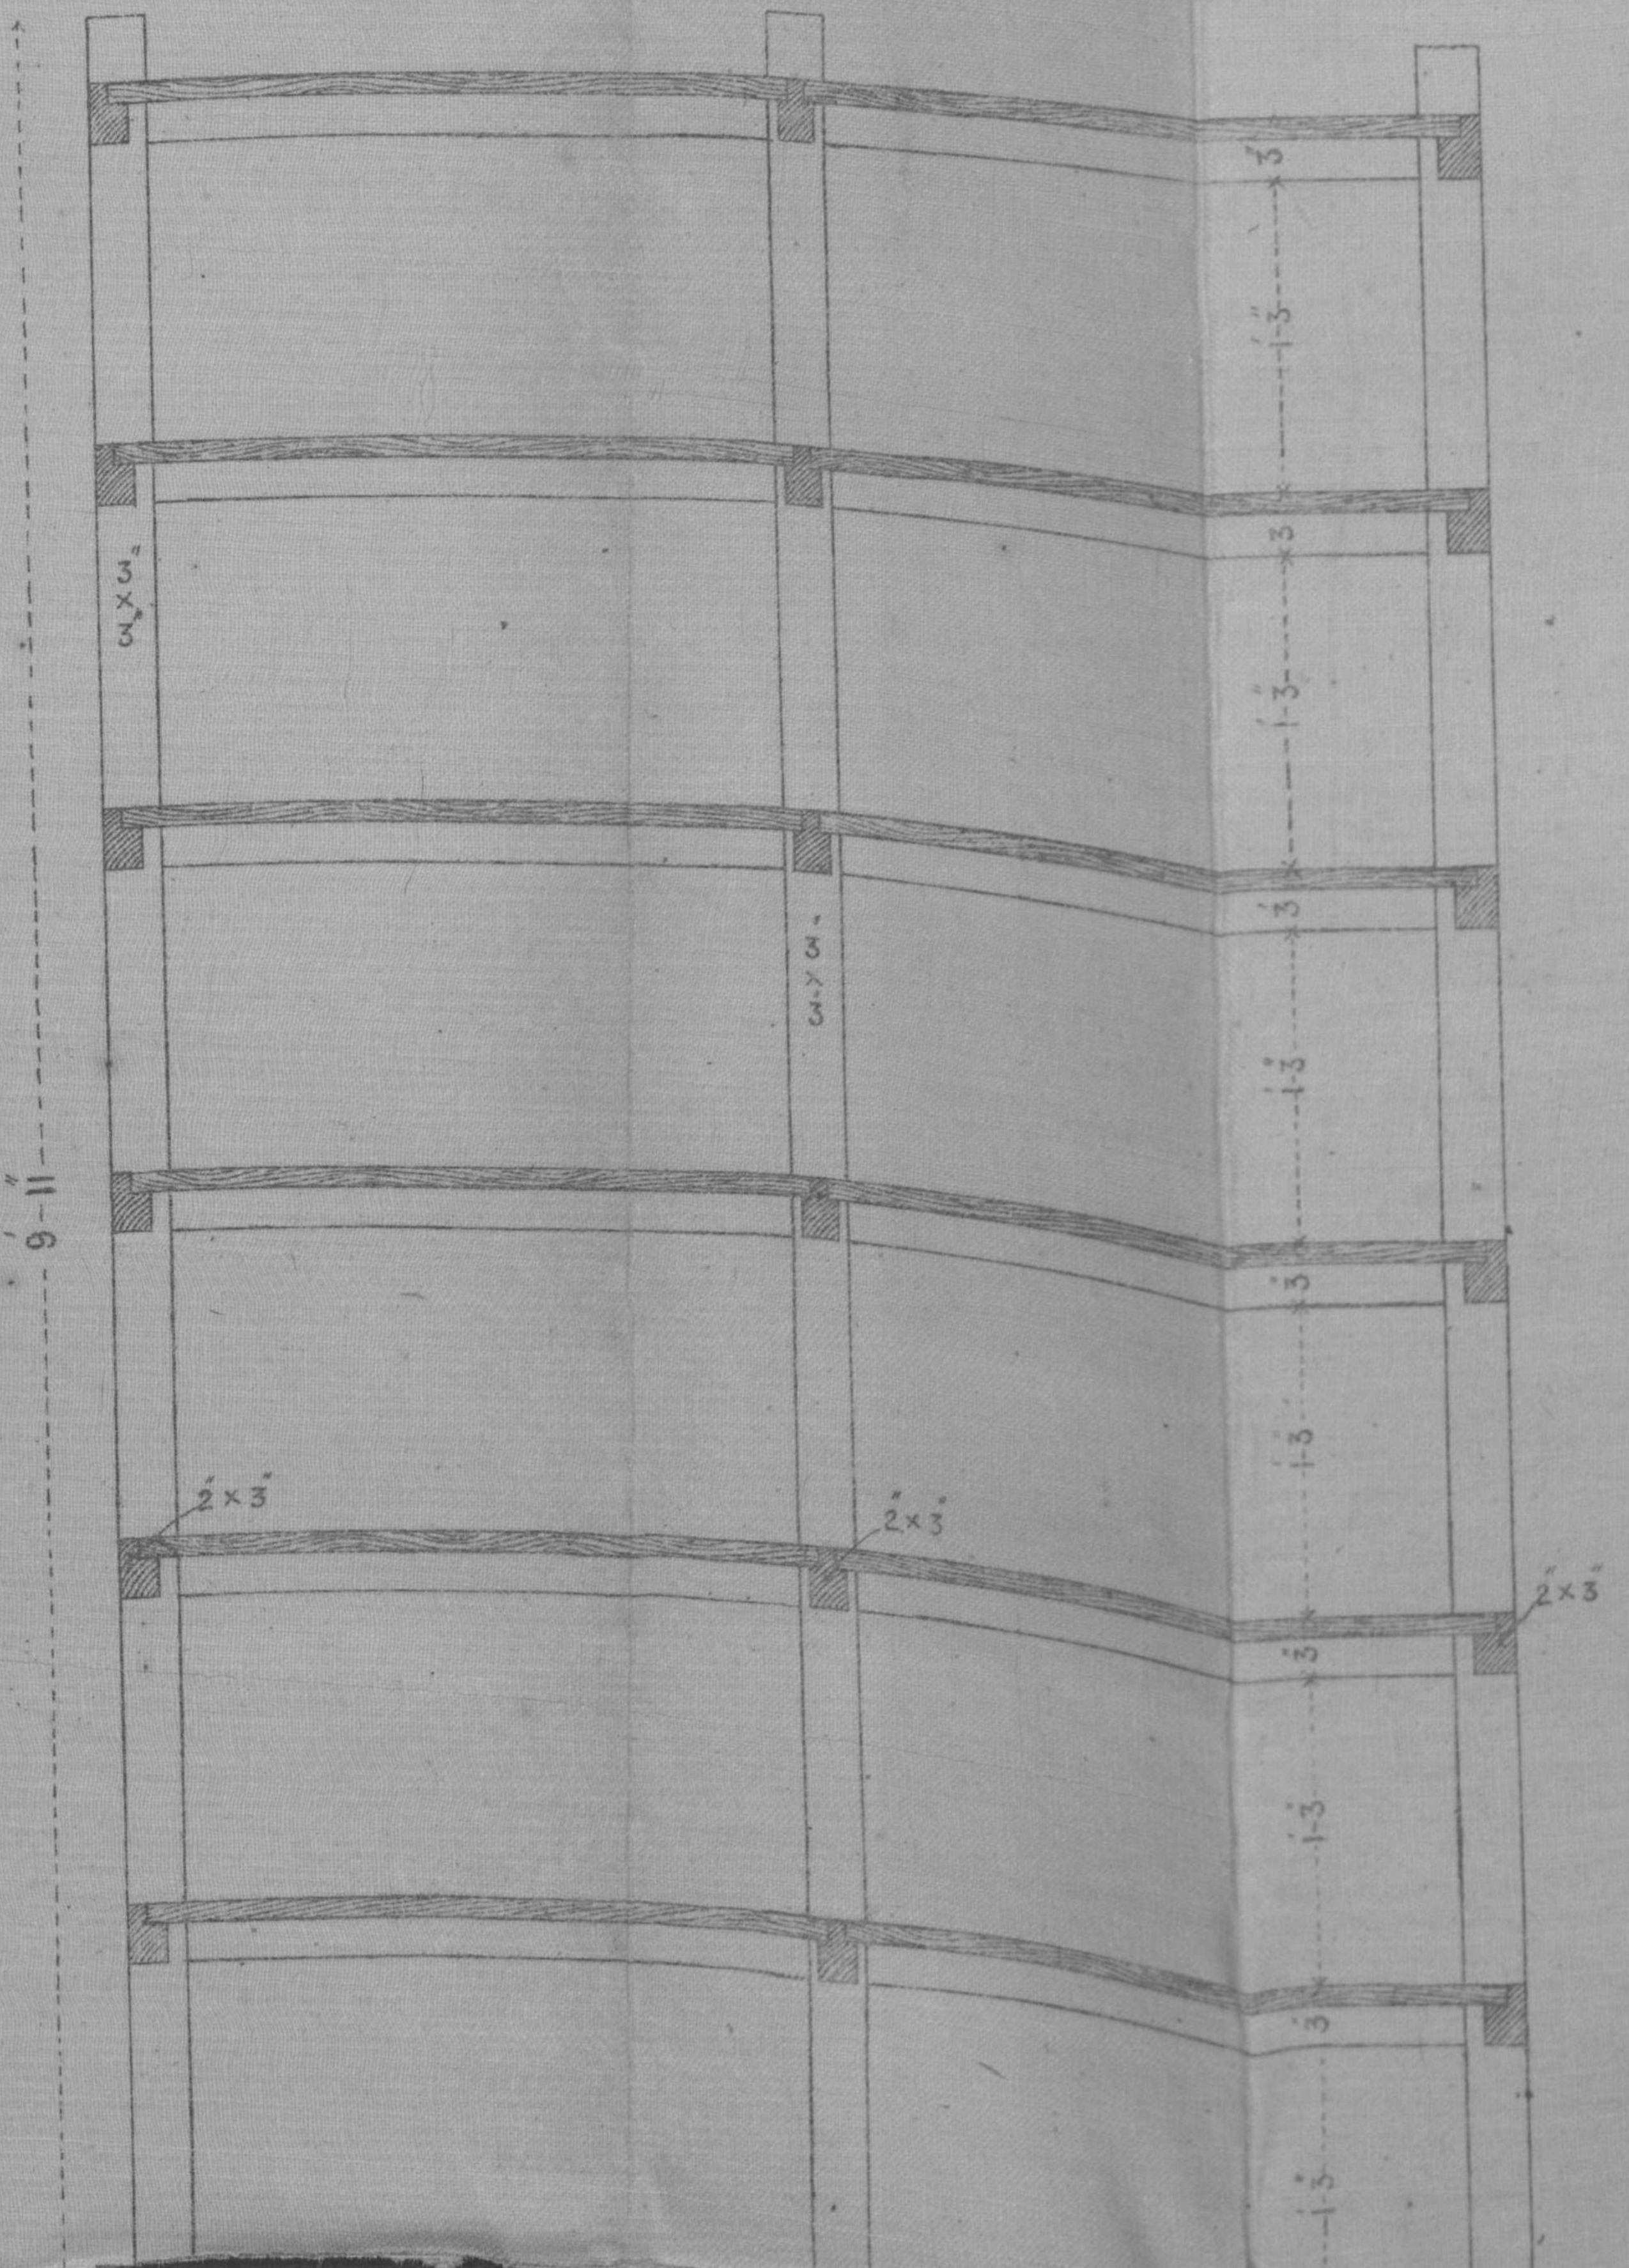
9'-11"
3¼"x3¼"
3¼"x3¼"
2"x3"
2"x3"
2"x3"
3"
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"

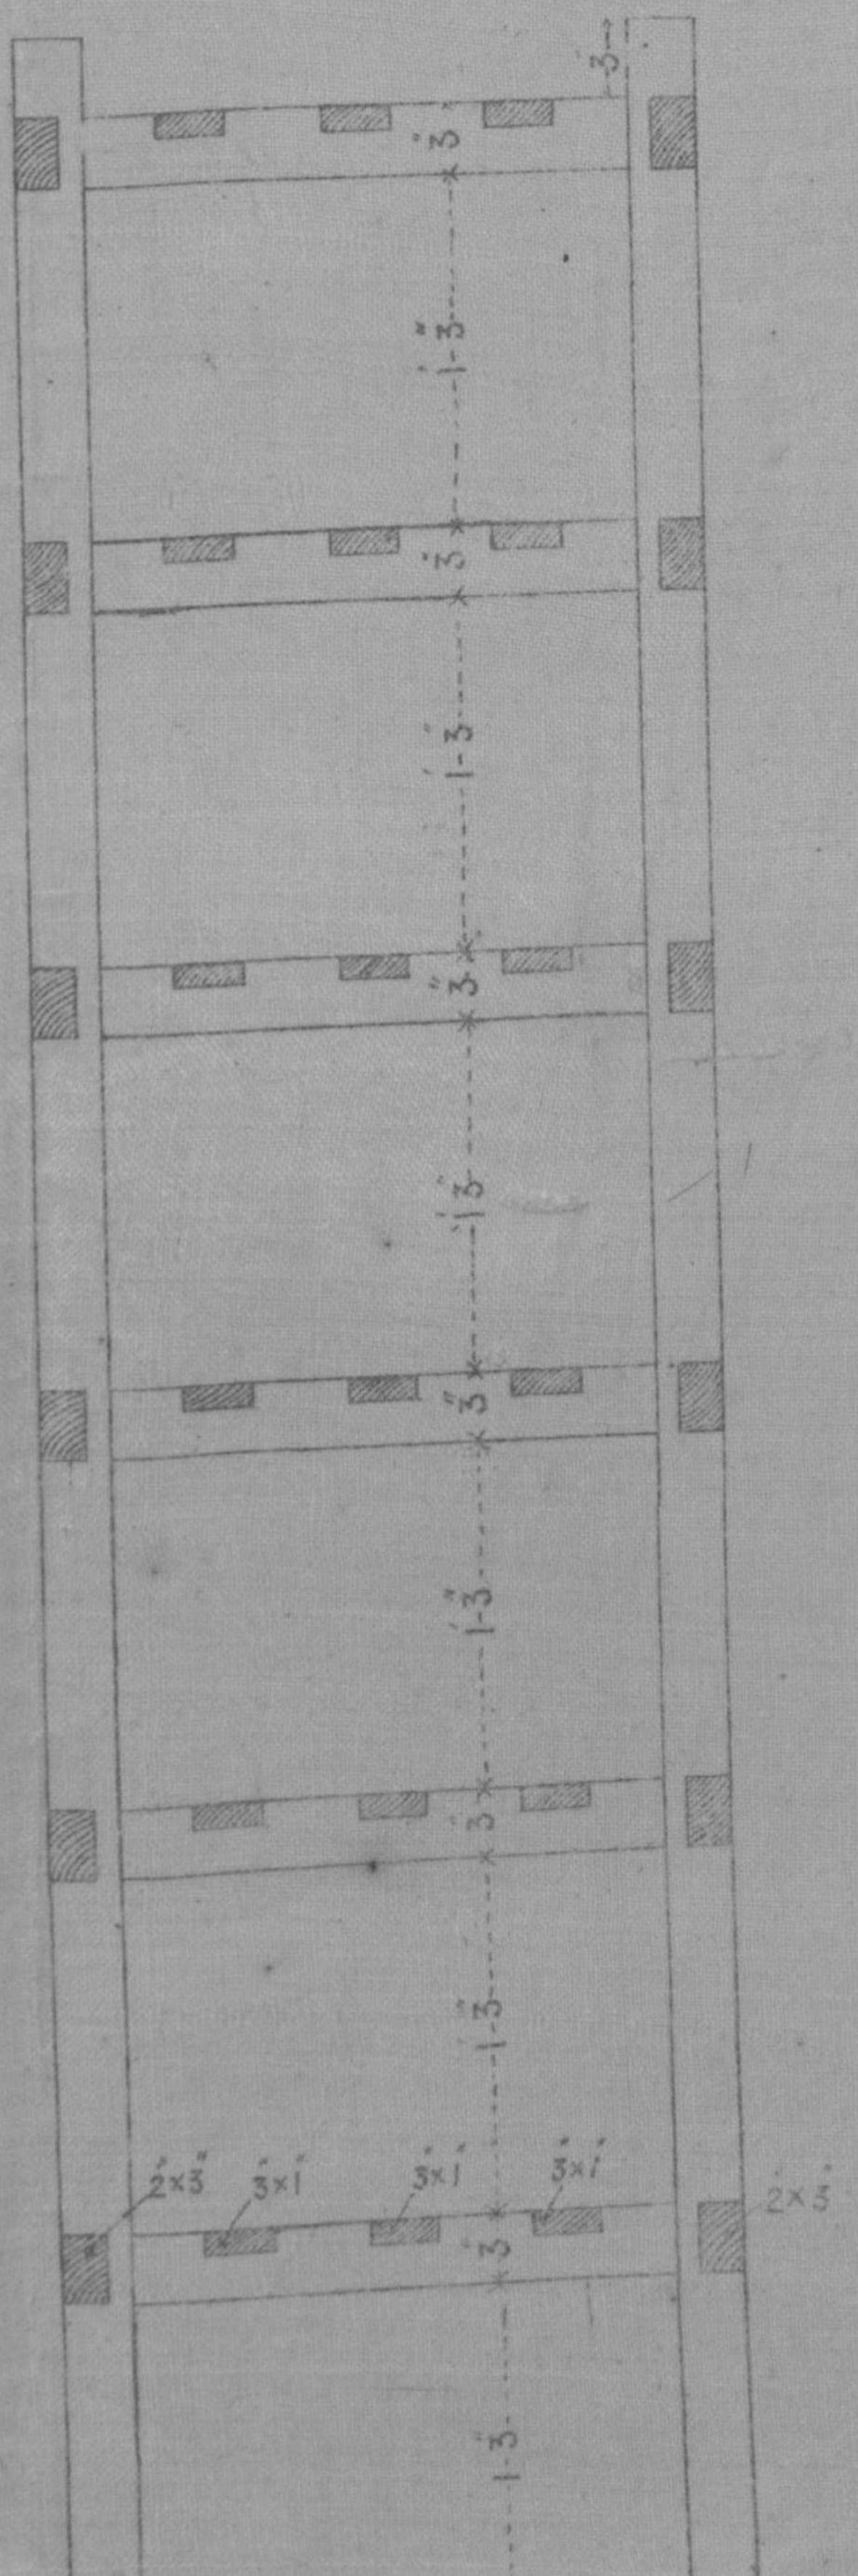
3"
1'-3"
1'-3"
1'-3"
1'-3"
1'-3"
2"x3"
3"x1"
3"x1"
3"x1"
2"x3"

END ELEVATION

SECTION. G.H.



SECTION. E.F

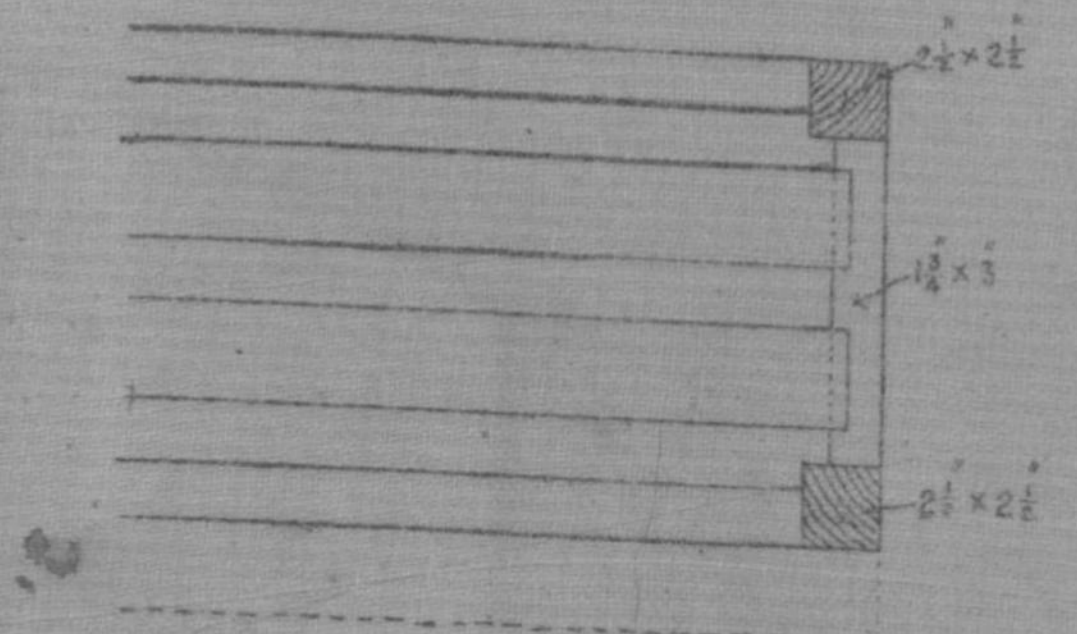

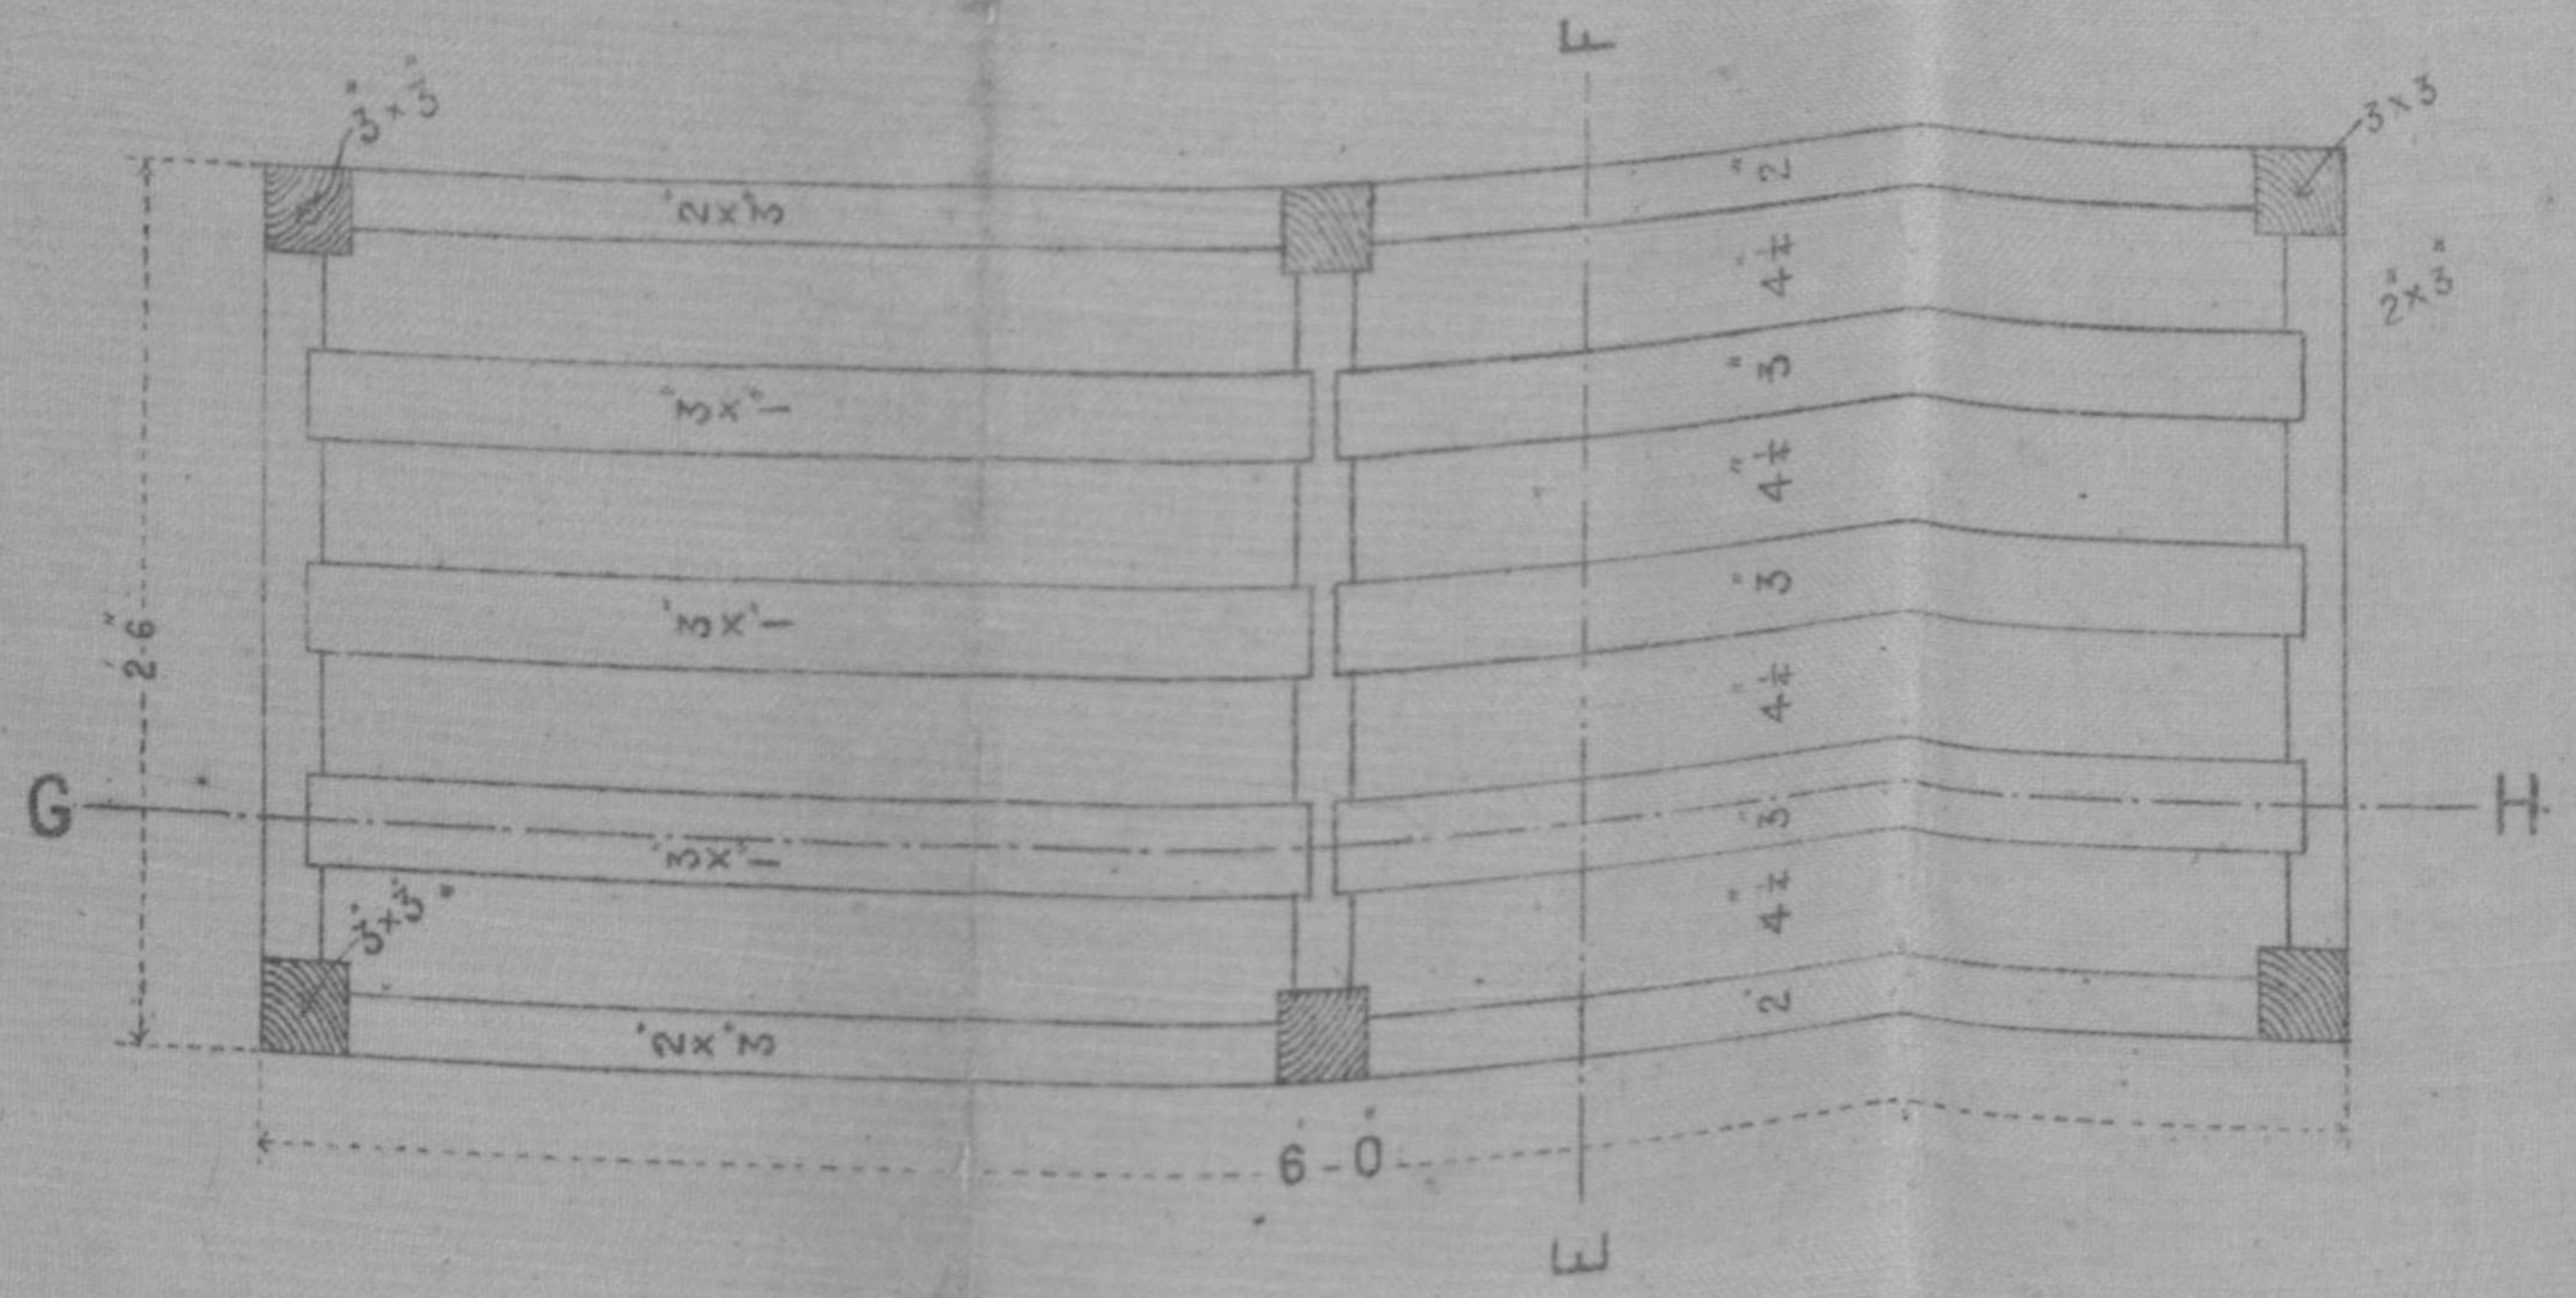

PLAN

Ov Boddy Major, R.E.
Under Secretary to Govt P.W.D.

(Signed) Henry Irwin C.I.E.
Consulting Architect to Govt
4th July 1890.

Photo-Zinco S. O. Madras. 1891.

2032 10

Print

Proceedings of the Board of Revenue

(Land Revenue).

Dated 15th May 1889.

No. 2884. Mis.

The Honorable J. Grose Esq.

the following papers:—

(1) Letter from the Collector of Tanjore to the Secretary to the Commissioners of Land Revenue, dated 15th February 1889, No. 112.

"I have the honor to forward herewith an Estimate (received from the Superintending Engineer, VI Circle) amounting to Rs 3410 for providing Iron Record Racks for the Mayavaram Taluk Cutchery and request that the Board will be pleased to obtain sanction of Government for the same."

(2) Reference on the above to the Collector dated 26th February 1889.

10

The

8

"The Collector is requested to report how he proposes to meet the cost."

(3) Letter from the same officer dated 26th March 1889, No. 187.

In reference to Board's Reference on Sub Register No. 423 of 1889 dated 26th February last, I have the honor to forward copy of letter from the Superintending Engineer VI Circle, No. 2574 T. G. dated 8th March 1889 from which it will be seen that no provision has been made in the D.P.W. Budget for the cost of record racks for the Mayaveram Taluk Cutchery.

2. I beg that the Board will be pleased to move Government to provide for the work in the final issue of the Civil works Budget for 1889-90.

(4) Reference on the above to the Collector dated 12th April 1889.

"The Collector is requested to report when the record room will be ready for the racks he proposes to put up."

(5) Letter from the same officer dated 26th April 1889, No. 251.

In reply to Board's reference dated 12th April 1889 on Sub Register No. 423 of 1889 Prl. Register No. 951 I have the honor to report that the Record Room of the Mayaveram Taluk Cutchery is now ready for the racks proposed to be put up.

Resolution

Submitted for the orders of Government.

2. The Collector of Tanjore requests that the Taluk Office at Mayaveram be supplied with thirteen iron record racks & two ladders at

at a cost of Rs 3410. The Superintending
Engineer reports that he has no funds at
his disposal from which, the charge can
be met but suggests that if the supply is
urgent, the Government may be moved
to make the requisite provision in the
final issue of the Budget. The Board
request that funds be provided accordingly
as it appears that the new taluk office
is now ready for the proposed racks to be put
up. It will be probably more economical
to place iron racks in the Taluk Cutcherry
than wooden ones. Once put up they will last
as long as the building.

E.1
P.W. 5860/89

(True Copies and Extract)

Secretary.

To
The Secretary to Government R.D
with 1 Enc. in Sub Regr 423/89 & 1 in
G.R. 951/89 to be retd.

Copy .. Collector of Tanjore.

JHB

(188 .)

REVENUE DEPARTMENT.

No.

From 2033

2032

Dated
Received
Enclosures

No.

SUBJECT.

12

12

(1889.)

REVENUE DEPARTMENT.

No. 3674

Pros.
From

The Board of Revenue
(L.R.)

Dated 15th May
Received 17 May
Enclosures 2

No. 2884.

SUBJECT.

Submitting to Govt. for orders application from the Collector of Tanjore for 13 Iron Record Racks and 2 ladders at a cost of Rs 3,410 for the Taluk Office at Mayaveram

Circ 26/6/89

P. T.

A.S. 6476.

H.M. 23/7/89

ABSTRACT.

3P

25.6.89

Read also C. No. 3820.

Endorsement No 3750.

Approved and transferred to the Public Works Department for the provision of the necessary funds.

Ootacamund
17th June 1889

Secretary to Govt.

SECRETARY TO GOVERNMENT
22 JUN 89
P.W. DEPARTMENT, MADRAS.

To
The P.W.D.
with enc.
~ Commrs of L.R.

0/1577

PUBLIC WORKS DEPARTMENT.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the
2032
READ the following

Proceedings of the Board of Revenue — No. 2884 Mis, dated 15th May 1889

Endorsement thereon in the Revenue Department — No. 3750 dated 17th June 1889.-

These are racks of the form designed under Mr. Hutchins directions for Court records. I don't think they will answer at all for taluk records which are usually contained in large dufters and they cost twice as much as the ordinary wooden racks which answer better. What is the distance between shelves in the iron racks, & what would be approximately the cost of ordinary jungle wood racks?

The estimate amounting to Rs 3,410 for providing 13 iron record racks for the Taluk Office at Mayavaram in the Tanjore District is sanctioned.

2.- As no funds are at present available with the Government, the Superintending Engineer will propose a reappropriation of funds from the grants for other works in his Circle.

3.- This sanction has been registered as Provincial No. of 1889-90 and classified as Civil Buildings, Original works.

W.C.B.
5.7.89

The Supdg Engineer VI Circle
with 2 Enclosures
~ Examiner P.W. Accounts
with duplicate abst. estimate
~ Revenue Department.

13

8.7.89

The Hon. Mr. J. H. Garstin C.S.I.

18.VII.89

Superseded

These racks of the Courts pattern will not suit Taluk records at all, and are very expensive. The ordinary wooden racks cost only $\frac{1}{5}$ the sum & are quite good enough for the purpose. They will be much cheaper in the long run, even if renewed again & again.

I consider that the estimate should not be sanctioned, but as the estimate has been approved in R.D. the proper hand letter be sent to the Hon. Mr. Garstin.

U.G.S.
18 Jul.

In view of the great saving in expense I have no objection to wooden racks being substituted for the iron ones proposed for the [illegible] Taluq Office. The estimate sh. be amended accordingly.

19/7/89

0/16/7 C.S. 4/7 H.M. 9/7 H.M. 18/7

2/17 C. 13.7.89 H.M. 22

No. 2032 W

Ref. [illegible] Cl. works

PUBLIC WORKS DEPARTMENT.

4P

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the 29th July 1889

READ the following

2032

Proceedings of the Board of Revenue (H. E. No. 288 Mis. d/ 5th May 1889)

Endorsement thereon in the Revenue Department (" " " 3750 d/ 17th June 1889)

1. The Government considers the plan of iron record racks, circulated with G.O. 1098 W d/ 12th April 1888, which was designed expressly for Court records is unsuitable for taluq records which are usually contained in large bundles. The iron racks are, moreover, far more expensive than wooden racks. The latter should accordingly be provided for taluq offices. A type plan, with specification and quantities, will, in due course,

H.G.S.
24 July.

(4

/4

be prepared by the Chief Engineer and issued for guidance.

2. A plan, with approximate Estimate amounting to Rs 625, for wooden racks to be put up in the taluq office at Mayavaram, ~~are~~ is forwarded to the Supply Engineer for adoption, in lieu of the plan and Estimate amounting to Rs 3410 already submitted.

3. The Supdg Engineer will propose a re-appropriation of funds to admit of the work being carried out in the current official year.

Cmd 30/7/89

5/15

O 22/7

Rnedds 20.7.89

WCS 30.7.89

I think a general order to S. Es. to supply wooden racks to taluq cutcherries would be advisable. [illegible]

AMC 15 7/89

Yes.

R.S.

D 18/8

The Chief Engr. P.W.D.
The Supdg Engineer.
with enclosures.
Other S. Es with Extract from 1.
Revenue Department.

To The Revenue Secretary for counter initials)

15

Govt. of 1889 Madras.

PUBLIC WORKS.

2032

Recd 30/7

Dated

Recd. Encl.

G.O., 29 July 1889 No. 2032 W

Record Racks

=

Provision of wooden instead of iron — for Taluq Offices directed — a plan & approximate est for wooden racks for the Mayavaram office forwarded to the S E VI Circle for adoption -

10/3 copies in full

100/7

Ent 30/7