

- (1) பக்கங்களின் எண்ணிக்கை 16
 (2) புதுக்கித் திருப்பிய நாள் மார்ச் 1990
 (3) ஆதாரங்குறிப்பவர் சுருக்கொப்பம் lona

தமிழ்நாடு ஆவணக் காப்பகம்.

தமிழ்நாடு அரசு

P.W.O. துறை

அரசாணை எண். மு. கோப்புத் தாள் எண்.	<u>1492</u>	அச்சகம் பலவகை
நாள் :	<u>5.6.1893.</u>	<u>198</u>

மடிக்கவோ கண்டபடி கையாளவோ கூடாது

8-Sheets

S. Leelan/...

ஆவண. கா-1-18,006-15-6-87.

GOVERNMENT OF MADRAS.
PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

Read—the following paper :—

G.O., dated 5th May 1893, Mis. No. 1684, Revenue.

Read—the following Proceedings of the Board of Revenue (Land Revenue), dated 18th April 1893, Forest Mis. No. 401 :—

Read—the following letter from the Superintending Engineer, IV Circle, to the Conservator of Forests, Southern Circle, dated 7th March 1893, No. 92/M :—

With reference to G.O., No. 3038 W., of 5th November 1892, I have the honour to forward for transmission to Government, for sanction and provision of funds, a plan and an estimate, amounting to Rs. 10,000, for constructing an office for the Conservator of Forests, Southern Circle, Coimbatore.

Endorsement by the Conservator of Forests, Southern Circle, dated 11th March 1893, No. 570.

Forwarded to the Board of Revenue with my approval.

Resolution—dated 18th April 1893, Forest Mis. No. 404.

Submitted to Government with reference to G.O., dated 21st November 1892, Mis. No. 5048.

2. The Board observes that according to the plan the manager's room is to be in the upper story, while the remaining clerks (5 in number) are to occupy two rooms in the lower story. It does not seem advisable to separate the manager and the clerks, as in that case the office will be left without adequate supervision. The two rooms provided for the clerks in the lower story appear to be sufficient for the whole office including the manager.

Order—dated 5th May 1893, Mis. No. 1684, Revenue.

The plan and estimate, modified with reference to the Board's remarks in para. 2 of its Proceedings read above, are approved and transferred to the Public Works Department.

(True Extract.)

(Signed) C. A. GALTON,
Secretary to Government.

ORDER—dated 5th June 1893, No. 1492 W., Public Works.

The estimate, amounting to Rs. 10,000, for constructing an office for the Conservator of Forests, Southern Circle, at Coimbatore, is sanctioned for execution when funds are available.

2. The designations of rooms have been altered in accordance with the remarks of the Board of Revenue contained in para. 2 of its Resolution, No. 404 Mis. (Forest), dated 18th April 1893.

3. This sanction has been registered as Provincial No. 34 W. of 1893-94 and classified as Civil Buildings, Original Works.

(True Extract.)

Major, R.E.,
Under Secy. to Govt., P.W.D.

To the Superintending Engineer, IV Circle, with plan and estimate (4).
" Examiner, Public Works Accounts.
" Revenue Department.
Editors' Table.

Ed. C. A. Munisawmy.
Spare Copies

1492
2

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1893} Madras.
PUBLIC WORKS.

Dated June, 5th.

Recd.

Encl.

G.O., 5th June 1893, No. 1492 W.

JUNE.

Office

Estimate of Rs. 10,000 for constructing an
— for the Conservator of Forests, Southern
Circle, at Coimbatore, sanctioned with
remarks.

REVENUE DEPARTMENT.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

Road the following Proceedings
41

of the Board of Revenue (Land Revenue),
dated 18th April 1893, ^{Forest} No. 404 (Mis) on the

Rea - following letter from the Superintending Engineer,
4th Circle, dated 7th March 1893, No. 92^m to the
Conservator of Forests, Southern Circle and
endorsement of the latter Officer thereon,
dated 11th March 1893, No. 570. —

With reference to G.O. No. 3038 W of
5th November 1892, I have the honor to forward
for transmission to Government for sanction
and provision of funds, a plan and an esti-
mate amounting to Rs. 10,000 for constructing
an Office for the Conservator of Forests, Southern
Circle, Coimbatore.

Endorsement by the Conservator of Forests, Southern
Circle, dated 11th March 1893, No. 570,
Forwarded to the Board of Revenue with

my approval.

Roman

Resolution: - dated 18th April, 1893, No. 404

Submitted

1892
CX

Submitted to Government with reference to G.O. dated 21st November 1892, No. 5048.
Mis.

2. The Board observes that according to the plan, the manager's room is to be in the upper story, while the remaining clerks (5 in number) are to occupy two rooms in the lower story. It does not seem advisable to separate the manager & the clerks, as in that case the office will be left without adequate supervision. The two rooms provided for the clerks in the lower story appear to be sufficient for the whole office including the manager.

Order thereon dated 5th May 1893, No. 1684, Mis. Revenue

The plan and estimate, modified with reference to the Board's remarks in para. 2 of its Proceedings read above are approved and transferred to the Public Works Department.

(True Extract).

Secretary to Government

In the P.W.D.
at the P.W.D. Office

P. W. CURRENT No. 4415

Govt. of {1893} Madras.
REVENUE.

To

The Public Works Dept.

Dated

Recd. 12.5.93

Encl. 4

(11111)

Mis. G.O., 5th May 1893, No. 1684.

SUBJECT

Approving the plan & estimate for constructing an office for the Conservator of Forests, Southern Circle at Coimbatore and transferring the same to the P. W. D.

Note by E.W.

It is observed that a window in the Clerk's room (basement floor) has both its ends resting over void, and brick in the Span's room (first floor) and the pa tran comes over a doorway, whilst relieving arches over doorways are not provided. It will be better to arrange the openings so that the above noted

12.5.93

12.5.93

13.4.93

defect may be
avoided

over
30.8/3

Some of the
work has been
done and it would
be better to have
it done in one
place than in two
The work is
small and it is
not worth the
trouble of doing
it in two places

Graph attached
over
21.8/3

all 12-5
9-5

Public Works Department.

Current No. 4415
Letter No. 1684
Dated 5. May 1893
From the Revenue Department

TECHNICAL NOTE.

Name of Work Constructing an office for the
Conservator of Forests, Southern Circle, Cumbria

Amount of Estimate, Rs. 10000

PARTICULARS OF ESTIMATE.

Main Building	Office	Rs. 9036
Subsidiary Buildings		" - - -
Contingencies	about 5% 7.	482
Petty Supervision	- do -	482
Land compensation		" - - -

Total Rupees ... 10000

PARTICULARS OF CONSTRUCTION.

Surface soil } not mentioned.
Sub soil }
Foundations will be carried 2' 9" deep, the
lower 1' 9" will be of concrete & the
upper one foot of brick in chumam
Basement will be raised 2' 6" high & built
of brick in chumam.
Walls of the ground floor will be raised
12 feet high & those of the first
floor 13 feet & built with brick in
chumam with archwork over doors
& windows

Plastering on Pointing of chimney.

Flooring the ground floor will be of 6" concrete plastered with mortar & the first floor planked with 1 1/2" jungle wood planks except the verandah which will be tiled.

Roofing will be of flat & pot tiles laid over teak rafters & supported by teakwood trusses placed about 4 feet from centre to centre.

Doors and Windows will be of the description noted in the estimate of teakwood & woodrilled 2 coats.

Roof timbers will be of teakwood & woodrilled.

Scantlings are correct.

Rates are fair except for flooring with concrete which appears very low.

The plinth area of the main building is 2883 square feet, and the cost per square foot will be Rs. 3-7-6.

The plan and estimates have been countersigned by the Conservator of Forests, Southern Circle, and approved in the Department. Remarks that the Board's suggestion of the Manager's room being located in the basement floor with the clerks be adopted.

This estimate has been framed with reference to G.O. No. 2038 in date 5th Nov. 1892 & provides for construction of an office for the Conservator of Forests, Southern Circle, at Coimbatore in the compound of the Collector's Office.

The design has been prepared in communication with the Collector & the Conservator.

The proposed office will consist of the following rooms & will be double storied.

Ground floor.
Manager's room - 17'9" x 26'0"
Clerks room - 26'9" x 26'0"
Two record rooms each 36'0" x 8'0"
Drinks verandah - 48'0" x 8'0"

1492 W
with a wooden stair case at one end of the verandah.
First floor - Conservator's office 27'0" x 16'0"
Spare room - 18'0" x 16'0"
Two bath rooms 3'10'0" x 9'3"
in verandah each
+ a verandah 10'3" wide all round.

It will be observed that a girdle comes over voids in the clerks room (basement floor) & a timber over a doorway in the upper spare room without any relieving arches over the doorway.

The rate for concrete flooring 6" thick, viz Rs. 4.... per square approx. appears to be very low. It is probably intended for Rs. 8-4.... made up there.

6" concrete at 12 lbs per sq ft = 6....
2 coats of chunnam plaster = 2-4....
Total per sq. of floor = 8-4....

In the report accompanying the estimate it is stated that the section of foundations proposed is the same as that allowed for the Dist. Forest Officer's build in the compound of the Collector's Office near the proposed site.

A

PUBLIC WORKS DEPARTMENT.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

No 1492 W of 5th June 1893-1892/6

Read the following


Printed in the Rev. Dept. No. 1684 M.O. of 5th May 1893

The estimate, amounting to Rs. 10000 for constructing an office for the Conservator of Forests, Southern Circle, at Coimbatore, is sanctioned for execution when funds are available.

2. The designations of rooms have been altered in accordance with the remarks of the Board of Revenue contained in para 2 of its Resolution No. 404 M.O. (Forest) of 18th April 1893.

3. This sanction has been registered as Provincial No. 34 W of 1893-94 and classified as Civil buildings original works.

Is the S.E. Circle with plan and estimate (4)
Eas. P.W. Accts.
Rev. Dept.
Editor's Table

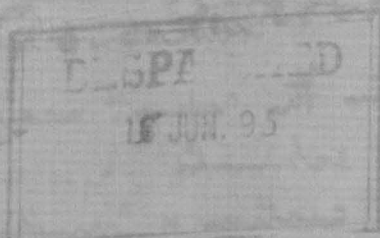

Attention is directed to the fact that the original works are to be done in the S.E. Circle. 18/6

Handwritten mark or signature

*Letter to for a
Office for the Conservation
of Forests, Coimbatore*

1492
7

cn^o 44-15

Govt. of Madras.
PUBLIC WORKS.

7/6/93

Dated

Recd.

Encl.

5 June 1893. No. 14924.

Office for the Estimate
of Rs 10,000 for custody and
for the Conservator of
Forests, Southern Circle,
at Coimbatore consisting
with remarks.

100
for

100
for