

7TH NOVEMBER 1894, No. 2825 W., PUBLIC WORKS.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following papers :—

G.O., dated 25th September 1894, No. 2319, Judicial.

Read—again G.O., dated 28th April 1894, No. 1021, Judicial.

Read—also letter from the Inspector-General of Registration, Madras, dated 13th September 1894, T. No. 4671.

ABSTRACT.—Submitting, for the sanction of Government, plan and estimate, amounting to Rs. 2,720, for the construction of a Sub-Registry office at Gooty in the Anantapur district.

Order—dated 25th September 1894, No. 2319, Judicial.

The plan and estimate, amounting to Rs. 2,720, for the construction of a Sub-Registrar's office at Gooty, are approved and will be transferred to the Public Works Department.

(True Extract.)

(Signed) J. F. PRICE,
Chief Secretary.

Note by the Chief Engineer, Public Works Department.

The undersigned considers that the foundations of the walls should be of concrete throughout to ground level instead of one foot of concrete and three feet of coursed rubble in chunam as proposed. This alteration will raise the estimate from Rupees 2,720 to Rs. 2,770 and the estimate as thus revised is recommended for sanction.

22nd October 1894.

(Signed) J. PENNYCUICK, Colonel, R.E.,
Chief Engineer, P.W.D.

ORDER—dated 7th November 1894, No. 2825 W., Public Works.

The estimate, amounting to Rs. 2,770, as altered by the Chief Engineer, Public Works Department, for constructing a Sub-Registrar's office at Gooty in the Anantapur district, is sanctioned for execution when funds are available.

2. This sanction has been registered as Provincial No. 64 W. of 1894-95 and classified as Civil Buildings, Original Works.

(True Extract.)

Under Secy. to Govt., P.W.D.

To the Superintending Engineer, III Circle,
with five enclosures.
,, Examiner, Public Works Accounts.
,, Judicial Department.

Exd. C. A. Munisawmy.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1894} Madras.
PUBLIC WORKS.

Dated November, 7th.

Recd.

Encl.

G.O., 7th Nov. 1894, No. 2825 W.

NOVEMBER.

Sub-Registrar's office at
Gooty

Estimate of Rs. 2,770 for constructing a
— in the Anantapur district, sanctioned
for execution when funds are available.

[53]
500-16-8-94.

Read - the following paper? Judicial Department.
by O. dated 25 Sept 1894, No 2319, Judicial



PROCEEDINGS OF THE MADRAS GOVERNMENT.

Read again by G. O. of 28th April 1894, No. 1021

also
READ the following paper:—

From the Inspector General of Registration,
Madras, dated 13th September 1894, J. No. 4671,
Submitting for the sanction of Government
plan and estimate amounting to Rs 2720.
for the construction of a sub registry office
at Gooty in the Anantapur district.

Order, 25th September 1894, No. 2319
The plan and estimate
amounting to Rupees 2,720 for the construction
of a sub Registrar's office at Gooty are
approved and will be transferred to the
Public Works Department.

(True Extract)

J.

The Public Works Department

with plan & estimate & report

by Inspector General of Registration.

W. H. S. P. H.
Under Secretary P. W. D.
for Chief Secretary

To

The Public Works Dept

Encls 5 (1 plan)
Recd: 3.10.94

Proceedings, dated 25-9-1894
No. 2319

Subject.

Approving and transferring
to the Public Works Department
the plan and estimate
amounting to Rs 2700 for
the construction of a Sub
Registrar's office at Gooty.

1165 W. 27 10. 5. 94

3-7-94

P.W.D.

Note by the Chief Engineer P.W.D.

20

The undersigned considers
that the foundations of the
walls should be of concrete
throughout to ground level
instead of one foot of concrete
and 3 ft of coursed rubble
in Chunnam as proposed.
This alteration will raise
the estimate from Rs 2,720
to Rs 2,770 and the estimate
as thus revised is recommended
for sanction.

21/10

E. W.

22/10 94

cu

Encl

No. 28254 of 7 November 1894.

Public Works Department.

Current No. 7889

Letter No. 2319.

Dated 25th September 1894.

From the Judicial Department.

NOTE BY TECHNICAL SECTION.

Name of Work Constructing a Sub Registrars
Office at Cooty in the Bangalore District.

Amount of Estimate, Rs. 2770
2740

PARTICULARS OF ESTIMATE.

Main Building	Office	Rs. 2546 2498
Subsidiary Buildings		" - - -
Contingencies	5%	124 122
Petty Supervision	Master for 5 months at Rs 20 per month	100
Land compensation		" - - -

Total Rupees ... 2770
2740

PARTICULARS OF CONSTRUCTION.

Surface soil light yellow gopi to a depth of 3 1/2 ft.
Sub soil hard gravel.
Foundations are to be 4 feet deep, the lower one
foot to be of concrete & the upper 3 feet
in two footings, the of coarsed rubble
in chunam 2 1/2" ext.
Basement is to be raised 2 feet high & built
of coarsed rubble in chunam 1 1/2" ext.
Walls are to be raised as per heights shown
on the type design & built of coarsed
rubble in chunam 1 1/2" ext with arch
work over doors & windows.

Plastering or Pointing ^{the interior of the building is to be plastered with 2 coats of chunnam & the exterior with 3 coats except 3 feet above floor level in rooms & the plinth face which will be plastered with cement.}

Flooring ^{flooring is to be of 18" square slabs laid over 4" of concrete except the second room which will be of 3/4" asphaltic on 4" of concrete.}

Roofing ^{is to be covered with bricks on edge & throughout except the verandah which will be of sloping terrace.}

Doors and Windows ^{are to be of teakwood of the descriptions noted in the estimate & painted with 3 coats of Carson's paint.}

Roof timbers ^{are to be of teakwood & painted with 3 coats of Carson's oak paint.}

Scantlings ^{are correct.}

Rates ^{are fair.}

The plinth area of the main building is 1004 square feet, and the cost per square foot will be Rs. 2.11.4.

The plans and estimates have been countersigned by the Inspector General of Registration and approved in the Judicial Department.

REMARKS.

This estimate has been framed with reference to G.O. No. 1165 W dated 10th May 1894 & provides for constructing a Sub-Registrar's office at Gooty, in the Madras Dist. as per type design circulated with G.O. No. 2230 W dated 21st July 1888 for covered roofing; except that the foundations have been altered to suit the nature of soil.

The site selected is close to the Deputy Collector's office & belongs to Govt. The foundations are proposed to be laid with one foot of concrete & 3 feet of concrete rubble in chunnam 2nd sort; if concrete be used to ground level the amount of the estimate will be increased by Rs. 50. vide calculation in the margin.

Cement foundations as proposed

Outer wall . 1 x 108.0' x 4.0' x 4.0' =	1728
Inner wall . 1 x 23.0' x 4.0' x 4.0' =	368
Verandah wall 1 x 33.6' x 3.6' x 4.0' =	469
Steps — 1 x 12.0' x 3.6' x 1.0' =	42
	<u>2607</u>
2607 cft. of concrete at Rs. 12.0.0 per 100 cft. =	<u>Rs. 326.</u>

as estimated.

Cement —————	Rs. 95
Concrete rubble foundation — 181	Rs. 276
Difference	<u>Rs. 50</u>

alteration recommended

Rs. 50
22/10 94

L. 2825 W. d/ 7th November 1894.

PUBLIC WORKS DEPARTMENT.


PROCEEDINGS OF THE MADRAS GOVERNMENT.

READ the following

Proceedings in the Judicial Deptt. d/ 25th September 1894 No. 2319.
Note by the Chief Engineer P.W.D. d/ 22nd October 1894

The estimate amounting to Rs. 2770, as altered by the Chief Engineer P.W.D., for constructing a Sub-Registrar's office at Gooty in the Anantapur District is sanctioned for execution when funds are available.

2. This sanction has been registered as Provincial No. 64 W of 1894-95 and classified as Civil Buildings, Original Works.

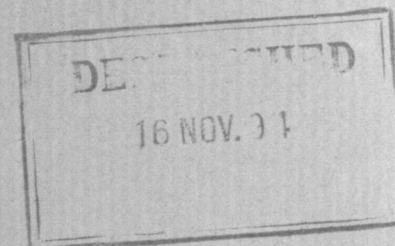

To The S.E. III Circle with 5 enclos.
" Exas. P.W. Dept.
" Judicial Deptt.

Cu

Kraj

22.10.94

44.

Estimate for Sub-Registrars
Office at Govt. Anantapur
H.L.

T
B

4
11

H.L.
M

110

CP-7449
Govt. of (1894) Madras.
PUBLIC WORKS.

Dated

Recd.

Encl.

G.O.,

7/11 1894 No. 2825W

Sub-Registrar's office
at Gooty.

Estimate of Rs 2770 for
constructing a — in the
Anantapur Dt, same
is termed for execution
when funds are available.

90
5

INDEXED
10/11

T.C.C.

8/11