

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Buildings and Roads.
Civil Works.

READ—the following papers:—

Proceedings of the Board of Revenue (Land Revenue), dated 6th February 1895, Mis. No. 591.

Read—the following letter from G. F. T. POWER, Esq., Acting Collector of North Arcot, to the Secretary to the Commissioners of Land Revenue, dated 24th January 1895, Ref. on No. 1597-Current:—

I have the honour to forward herewith, duly countersigned, the estimate received from the Superintending Engineer, IV Circle, for the construction of the Deputy Tahsildar's office at Tirupati approved of in G.O., Mis. No. 4516, dated 17th October 1892, communicated with Board's Proceedings, Mis. No. 6919, dated 27th idem, and to request that the Board will be pleased to obtain the early sanction of Government for the execution of the work.

Resolution—dated 6th February 1895, Mis. No. 591.

Submitted for the sanction of Government with reference to G.O., dated 17th October 1892, Mis. No. 4516.

(True Copy and Extract.)

(Signed) L. M. WYNCH,
Secretary.

Mis. No. 1044, Revenue.

Approved and transferred to the Public Works Department.

FORT ST. GEORGE,
9th March 1895.

(Signed) E. GIBSON,
Secretary to Government.

Note by the Chief Engineer, Public Works Department.

The two south-western end cells are badly lighted owing to the wall of the arms room being just in front of their doors. An iron barred window is thought necessary in the verandah wall, as shown on the plan, in order to admit light.

2. The estimate provides for country wood rafters and wall purlins. As the undersigned considers that teak should be allowed instead of country wood, the estimate has been altered accordingly.

(Signed) J. PENNYCUICK, Colonel, R.E.,
Chief Engineer, P.W.D.

ORDER—dated 6th April 1895, No. 863 W., Public Works.

The estimate, amounting to Rs. 11,990 as altered by the Chief Engineer, Public Works Department, for constructing a Deputy Tahsildar's office at Tirupati in the North Arcot district, is sanctioned.

2. The question of providing funds for the work will be considered shortly.
3. Attention is drawn to the Chief Engineer's note recorded above.
4. The sanction accorded in paragraph 1 has been registered as Provincial No. 3 W. of 1895-96 and classified as Civil Buildings, Original Works.

(True Extract.)

Under Secy. to Govt., P.W.D.

To the Superintending Engineer, IV Circle,
with six enclosures.
„ Examiner, Public Works Accounts.
„ Revenue Department.

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1895} Madras.
PUBLIC WORKS.

Dated April, 6th.

Recd.

Encl.

G.O., 6th April 1895, No. 863 W.

APRIL.

Deputy Tahsildar's office at
Tirupati

Estimate amounting to Rs. 11,990 for
constructing a — in the North Arcot dis-
trict, sanctioned with remarks.

Public Works Department.

Current No. 1999

Letter No. 1044 His.

Dated 9th March 1895

From the Revenue Department.

NOTE BY TECHNICAL SECTION.

Name of Work Constructing Deputy Tahsildar's
Office at Tirupati in the North Arcot Dist.

Amount of Estimate, Rs. 11,500

PARTICULARS OF ESTIMATE.

Main Building Office	Rs. 9787
11 wooden work racks & 1 ladder	566
Subsidiary Buildings	"
Decorating existing office & verandah w. g. sub. gate	300
Contingencies 2 1/2 %	258
Petty Supervision about 2 1/2 %	239
Land compensation	"
New iron doors to sub. gate w. w. d.	350
Total Rupees ...	11,500

PARTICULARS OF CONSTRUCTION.

Surface soil Black earth to a depth of 3 feet
Sub soil yellow earth
Foundations are to be 5 feet deep and laid
throughout with concrete to ground
level.

Basement is to be raised 2 feet and built
of table moulded bricks in chumam
Walls are to be raised as per height
shown on the type design and
built of table moulded bricks
in chumam, with archwork over
doors & windows.

the interior of the building
is to be plastered with 2 3

Plastering or Pointing

Coats of Chumam & the exterior painted
with lat & asphalt

Flooring is to be of 8" square bricks laid on a
bedding course of 6" concrete & painted
with cement, except the record room which
will be floored with 1/4" asphalt on 6" concrete

Roofing is to be of modern machine tiles,
Kangaroo pattern, laid over teak rafters
& sealed with 1/2" cedar wood planks

Doors and Windows are to be of teakwood & painted
with 3 coats of Silicate Oak paint

Roof timbers are to be of teakwood, except the
rafters & wall pullings which are to be of
cedar wood & woodshed 2 coats.

Scantlings are correct

Rates are fair

The plinth area of the main building is
4021 square feet, and the cost per square
foot will be Rs. 2-10-3.

The plans and estimates have been countersigned
by the Collector of the District
and approved in the Revenue Department

REMARKS.

This estimate has been framed
with reference to G.O. No. 3025 dated
30th March 1892 & provides for constructing
a Deputy Tahsildar's office at Tirupati
in the North Arcot District as
per type design circulated with G.O.
No. 31 dated 20th March 1891, except
the subjoined words which already
exist & which are reported to be in very
good condition, as per plan submitted.

Provision has been made in the es-
timate for 11 teakwood record racks
each 2'3" x 6'0" x 9'11" and one movable
wooden ladder, as per type design cir-
culated with G.O. No. 802 dated 19th
March 1891, also for providing new iron
doors to the sub joint wards for a
lump sum of Rs. 350, as the existing
doors it is reported, were pronounced
to be unsafe by the S.C. of Tails.
A compound wall around the pro-

posed office together with out-
buildings already exist. Pro-
vision has been made for any of these.

It will be observed that the
two south western end cells will
be badly lighted owing to the
wall of the arms room being just
in front of the cell doors. It is
submitted that an iron barred
window in the verandah wall
similar to the one proposed at
the south east end may be pro-
vided as marked in pencil
in order to admit light & air.

Necessary, I think, as
regards air, but not
light, for prison cells
are not built with the
object of being cheerful.

If there is no objection - other than
that of economy - in providing country
wood instead of wall pullings within
of teak, the latter should be allowed
instead.

289 c. ft. of country wood, as per estimate @ Rs. 1 1/2 = Rs. 433 1/2
289 c. ft. of teak wood instead @ Rs. 4.00 = Rs. 1156

The difference of Rs. 433
could not be much in so large an estimate
and would make a permanent benefit
of the work.

Comd. & abn. & sanction

Estimate allowed
according to the 26th Feb 1895
8. W.

1899



Read the following paper
of 6 dated 6 Feb 1895, No. 591

Proceedings of the Board of Revenue

(Land Revenue).

Dated 6 February 1895.

No. 591 Dis

READ the following letter from G. F. J. Pauer
Esq., Agt. Collector of N. Arcot, dated
24th January 1895 Ref. No. 1597
to the Secretary to the Commissioners of
Land Revenue, Madras.

I have the honor to forward
herewith, duly countersigned, the
estimate received from the Super-
intending Engineer IV Circle, for
the construction of the Deputy
Tahsildar's office at Tirupati
approved of in G.O. No. 4516 Dis
dated 17th October 1892, communicated
with Board's Proceedings No. 6919 Dis
dated 27th idem, and to request
that the Board will be pleased
to obtain the early sanction
of

of Government for the execution of the
work.

Resolution 6 Feb 1893, No. 591

Submitted for the sanction
of Government with reference to G.O.
dated 17-10-92 No. 4516 his.

(True copy & Extract)

L. J. J. J. J.
Secretary.

To the Secretary to Govt.
C.D. with plans
testimate

A

(1895.)

REVENUE DEPARTMENT

Current Number. 1088.

From

The Board of Revenue.

(Land Revenue)

P. W. CURRENT No. 1999

ABSTRACT.

^{2 Pm}
Endorsement No. 1044 Mis.

Approved and transferred to the
Public Works Department.

Chibor
Secretary to Government.

Area: 13.3.55^x
Cuts 6 (2 plans)
Fort Saint George
9th March 1895.

Dated 6th }
Received 9th } February 1895.
Enclosures 5

No. 591 Mis.

SUBJECT.

Submitting for the sanction of Government plans and estimates for the construction of the Deputy Tahsildars Office at Pimpali, North Arcot District.

3.4.92 N^o 3020a
18.6.92 - 1787

To
The P. W. Dept. with 5 enclosures
" Board of Revenue (L.R.)

^{Note}
circulated to the Hon. Mr. Grose in 1892.

Cumms

2/3

P.W.D

3 Pm

Note by the Chief Engineer P.W.D

The two south-western end cells are badly ^{light} ventilated owing to the wall of the arms room being just in front of their doors. An iron barred window is thought necessary in the verandah wall, as shown on the plan, in order to admit ^{light} air.

2. The estimate provides for country wood rafters and wall purlins. As the undersigned considers that teak should be allowed instead of country wood the estimate has been altered accordingly.

Cumms
2/3
Jan

No 863 W. dated 6 April 1895.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

Read the following

Proceedings of the Board of Revenue (Land Revenue) No 59/1895 dtd 26 February 1895
Endorsement thereon in the Revenue Deptt No 1044/1895 dtd 9 March 1895
Note by the Chief Engineer P.W. Deptt dtd.

4 Pm

The estimate amounting to Rs 11,990 as altered by the Chief Engineer, P.W. Deptt., for constructing a Deputy Tahsildar's office at Tirupati in the North Arcot District, is sanctioned.

W
4 Apr

2 The question of providing funds for the work will be considered early next official year shortly.

3. Attention is drawn to the Chief Engineer's note recorded above.

4. The


next official year or this?

note
The order was signed
doubtful before the
expiration of 1895-96.

4. The sanction accorded
in para 1 has been registered
as Provincial No 3 W of
1895.96, and classified as civil
Buildings, Original Works.

Estimate for a Deputy
Tahsildar's office at
Tirupati, North Arcot Dt.


copy
29/5/95
S
20/7

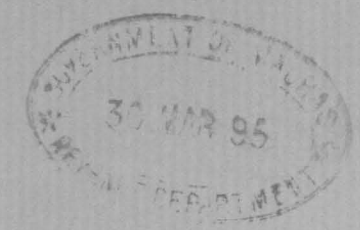

I
B
C

The ~~Revenue~~ Revenue Secretary
for favor of countermanding.

The S.E. IV circle with 6 enclos.
" Engr, R.A. Secy.
" Revenue Dept.
Rd 29/3824.

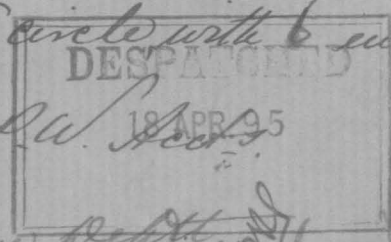

YSS
C
B

1999

Govt. of Madras.

PUBLIC WORKS.

534/6

Dated

Recd

Encl.

G.O. 6 April 1895, No. 863. A

Deputy Tahsildars office
at Tirupathi

Sum amounting
Rs. 11,990 for Construction
- in the North Arcot
District, sanctioned
with remarks.

100
6

26/7/94