

Public Works (1897) Department.

G.O., No. 620 J

DATED 6 July 1897

7/7/97

[Despatch Abstract.]

Sluices, sanctioning the execution, by the
P.W.D., of the contribution work of fixing
three cast iron pipe — in Nelli Kora i Chan-
nel, Coimbatore D^o.

20
4

W

26.2.57

1/2

BACK PAPERS.

FURTHER PAPERS.

IRRIGATION.

Government {1897} of Madras.
PUBLIC WORKS.

Recd.

Enclosures

Regd.

1897.

Spare copies

G.O., No. 620 I., 6th July 1897.

JULY.

Sluices

Sanctioning the execution, by the Public Works Department, of the contribution work of fixing three cast-iron pipe — in Nellithorai channel, Coimbatore district.

Sanctioning the execution, by the Public Works Department, of the contribution work of fixing three cast-iron pipe — in Nellithorai channel, Coimbatore district.

125-77

No. 620 I., 6TH JULY 1897.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Irrigation.

READ—the following paper:—

From J. HANNAN, Esq., Superintending Engineer, IV Circle, to the Chief Engineer for Irrigation, dated Coimbatore, 24th June 1897, No. 119/I.

I have the honour to submit, herewith, an estimate amounting to Rs. 244, including percentage charges for establishment and tools and plant, for fixing three cast-iron pipe sluices in Nellithorai channel, for favour of obtaining the sanction of Government for carrying out this contribution work, as the full amount has been recovered from the ryots interested in the case.

The necessity for fixing these cast-iron pipe sluices is explained in the report accompanying the estimate.

ENCLOSURE.

REPORT to accompany the estimate for constructing three cast-iron pipe sluices in the Nellithorai channel.

					RS.
Amount of estimate	501	100	412	888	244

These sluices are intended to irrigate Messrs. Meanji Sait & Co.'s lands, about 75 acres in extent. The land to be irrigated under 1st sluice is 25 acres, and the existing dry rough stone sluice is in a very bad condition. It is proposed to replace it by a cast-iron pipe sluice of 7" diameter. The lands under 2nd and 3rd sluices are 43 and 7 acres, respectively, and they are irrigated by open cuts. Therefore, it is proposed to fix cast-iron pipe sluices of 10" and 4" to the 2nd and 3rd sluices. As there is much wastage of water under these sluices, as they are of open cuts, &c., now it is proposed to construct these pipe sluices in those places to prevent wastage of water by contribution, including percentage charges for establishment and tools and plant, to irrigate the lands of Messrs. Meanji Sait & Co.

10th June 1897.

(Signed) A. A. G. MALET,
Executive Engineer.

ORDER—No. 620 I., dated 6th July 1897.

The execution, by the Public Works Department, of the work referred to is sanctioned.

(True Extract.)

Under Secretary to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.
 „ Superintending Engineer, IV Circle, with two enclosures.
 „ Examiner, Public Works Accounts.

Exd. T. K. Narayana Aiyangar.

Public Works (1897) Department.

CURRENT No. 342

Order

The execution by
the P. W. Dept of the
work referred to is
sanctioned.

From The Supg. Engineer
To the Circle

No. 119 Rel ✓

Dated 24th June 1897.

Received 28 13.1.97

Enclosures 3

Spare copies

SUBJECT.

Kallithorai Channel
 Submits for sanction of
 Government an estimate
 to Rs 2404 for fixing three cast
 iron pipe sluices in the —
 for execution as Contribution
 work

To
The Chief Eng^r for S.
Laffrey 11 Wmth 2 Encl^s
£. 9. 102

Acis
2876797

217

BACK PAPERS

FURTHER PAPERS.

Report to accompany the
estimate for constructing three cast Iron
Pipe sluice in the Vellithurai channel.

Amount of Estimate Rs 244.

These sluices are intended to irrigate Messrs. Menzies & Co's land about 75 acres in extent. The land to be irrigated under 1st sluice is 25 acres and the existing dry rough stone sluice is in a very bad condition. It is proposed to replace it by a cast iron pipe sluice of 7" diam. The land under 2nd + 3rd sluices are 43 + 7 acres respectively and they are irrigated by an open cut. Therefore it is proposed to fix cast iron pipe sluices of 10" + 14" to the 2nd + 3rd sluice. As there is much wastage of water under these sluices as they are of open cut & now it is proposed to construct these pipe sluices in ~~those~~ ^{those} places to prevent wastage of water by contribution including percentage charge for establishment, tools & plant to irrigate the lands of Messrs Menzies & Co.

С. А. Вуко

Our
7/6/97.


G.O.	No.	Department.	Date.
------	-----	-------------	-------

G.O.	No.	Department.	Date.
------	-----	-------------	-------

Amount of Estimate Rs 244.

С. 22. Визит

Our
7/6/97.

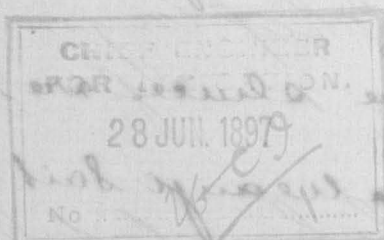

Enclosures 3.

- 1. Estimate
- 1 Detailed list
- 1 Report.

12/119
 Superintendent Engineer's Office
 Coimbatore 24th June 1897.
 From J. Hannan Esq.
 Superintendent Engineer
 4th Circle
 of
 The Chief Engineer
 for Irrigation.

Sir, I have the honor to submit herewith an estimate amounting to Rs. 244 including percentage charges for establishment and Tools, and Plant for fixing three cast iron pipe sluices in Kellithorai channel for favor of obtaining the sanction of Government for carrying out this contribution work, as the full amount has been recovered from the ryots interested in the case.

The necessity for fixing these cast iron pipe sluices is explained in the report, accompanying the estimate.

I have the honor to be
 Sir
 Yours most Obedt Servt.

J. Hannan
 Superintendent Engineer
 4th Circle