

Public Works (1896) Department.

G.O., No. 1286

DATED 20/4/96

[Despatch Abstract.]

Well Supplemental estimate
for sinking a — in the Compound
of the Taluq office at Gadivara
Kistna Dt., Sanctioned.

Exd. T. K. Narayana Aiyangar.
Spare Copies

Exd. T. K. Narayana Aiyangar.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1896} Madras.

PUBLIC WORKS.

Dated April, 20th.

Recd.

Encl.

G.O. No. 1283 W., 20th Apr. 1896.

APRIL.

Well

Supplemental estimate of Rs. 860 for sinking a — in the compound of the Taluk office at Gudivada in the Kistna district, sanctioned with remarks.

PUBLIC WORKS DEPARTMENT.

No. 1286 W. of 20 April 1896.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

READ the following

From the Suptg. Engineer, II Circle, No. 2644 K.S.D. 14th March 1896

The estimate, amounting to Rs 860, for sinking a well in the compound of the Taluk office at Gudivada in the Kistna District is sanctioned as supplemental to the estimates aggregating Rs 37,510 sanctioned in Nos. No. 2865 W, 254 W and 2448 W dated 7th November 1893, 2nd February 1895 and 10th October 1895 respectively.

2. The current year's grant for the work is Rs 15,000, and a sum of Rs 15,000 has also been provided in the preliminary

issue of the Provincial Civil
Works budget for 1896-97.


The Suptg. Engineer will
apply for such additional
allotment as may be ne-
cessary.

3. The Suptg. Engineer
should obtain the Collector's
countersignature to the esti-
mate.

4. The sanction accorded
in para 1 has been registered
as Provincial No 8 W of
1895-96, and classified as
Civil Buildings, Original
Works.

25/3/96
M. 3

To
The S.E. II Circle with 5 encls.
" Exar. P.W. Accts
" Revenue Dept.

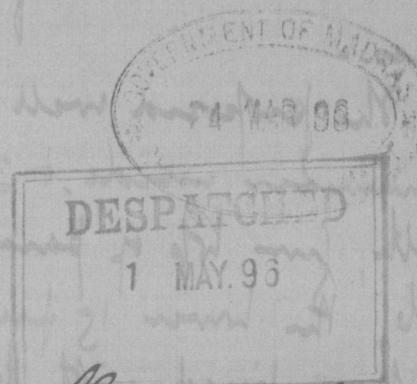

No 2448 W of 4 October 1895
Current 7096

With reference to para 2
of G.O. No. 254 W dated 2nd
Febr 1895, the S.E. II Circle sub-
mits a supplemental esti-
mate amounting to Rs 290 for
Constructing a latrine in the
Compound of the new Taluk
Office now under construction
at Gudivada in the Kistna
Dist. based on the revised
type design circulated
with G.O. No. 1709 W dated 9th
July 1894.

The original estimate, a-
mounting to Rs 34,500 for
Constructing a Taluk Office at
Gudivada was sanctioned
in G.O. No. 2865 W dated 7th
Nov. 1893.

The scantlings for roof
timbers are correct & the
rates are fair.

The estimate has not been
countersigned by the Collector
of the Dist.

2524/3
4E 26/3
20

Current 1648
W of

The S.E. II Circle, submits for
the early sanction of Govt. a sup-
plemental estimate amounting
to Rs 860 for sinking a well in
the compound of the Taluk Office
at Gudivada, now under con-
struction, in the Kistna Dist.

An estimate amounting to
Rs 34,500 was sanctioned in
G.O. No. 2865 W dated 7th Nov. 1893
for the construction of the Taluk
Office.

The well is stated to be very
necessary as there is no source
of water supply anywhere near
the site and as the District
Municipal Council house is proposed
to be built in the same compound,
the well will serve for both the
Offices.

The proposed well is to be 9 ft.
in diameter inside, & 30 feet in
depth, from top of parapet to well
curb, the lower 15 feet is to be
built or lined with brick in mud
& the upper 15 feet of brick in
Chunnam 18 inches thick, pointed
with Portland cement & cased
with cut stone 6" thick. A con-
crete platform 9 feet wide in the
center.

Whining wall of brick in chime
: nam at end is the built all
round the well with a slope
of 1 in 18.

The rates cannot be compared
with the Divisional schedule
but data lists have been
submitted in support of them

The estimate has not been
counter-signed by the Collector
of the Dist.

~~No.~~
N. M. 46.

Enclos. 4

1 Dist. Cnto

1 Report

1 Data

1 Tracing

4

Letter from the Executive Engineer,
Kistna Eastern Div., to the Supg Engineer,
2nd Circle, d/ 11.2.96, N.º 5096.

In forwarding herewith
supplemental estimate for a well
in the Compound of Godinada
Cutchery, I have the honour to request
that you will be good enough to
obtain sanction for it with the least
possible delay as it will be required
for use in building the Cutchery
and in any case should be
sunk during the dry weather.

N.º 2644 HS
14.3.96

Forwarded to the Chief
Engineer, P.W. Department, for favour
of obtaining the sanction of Govt.
to the Supplemental estimate
amounting to Rs 860 for constructing
a well in the Compound of the Salga
Cutchery at Godinada.

2. As it is necessary to build a
well in the Compound, the Dist. Engineer
has been authorized to proceed
with the work in anticipation of
sanction to the estimate.

S. Howbrey Keble
R/S

for Supg Engr. 2nd Circle

From

The Supg Engineer
Second Circle

Recd 16-3-96

Encl: 5 (1 plan)

To
The Chief Engineer
P. W. Department

No. 2448 W 4-10-95 ✓

" 254 W 2-2-95 ✓

" 2865 W 7-11-93 ✓

" 1709 W 9-7-94 ✓

Dated 14th March 1896

Encl: 4

No. 2644 K S

Guidiada Salug Bulchun
- All in the compound
of Hornards for
sanction and Estimate
of Rs 860 for constructing a

I

For Sanctioning

Chd

16.3.96