

Public Works (1896) Department.

G.O., No. 1751 W

DATED 12 June 96

[Despatch Abstract.]

Collector's office at Nellore
Estimate for improving the Vernacular
Record room of the — returned to the
Suptg Engineer II Arch for Sanction & execution

BACK PAPERS.

No. 1751 W., 12TH JUNE 1896.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

**Buildings and Roads.
Civil Works.**

READ—the following papers:—

Proceedings of the Board of Revenue (Land Revenue), dated 24th April 1896, Mis. No. 1914.
Endorsement thereon in the Revenue Department, dated 15th May 1896, Mis. No. 1885.

ORDER—No. 1751 W., dated 12th June 1896.

The estimate, amounting to Rs. 1,150, for improving the Vernacular record-room of the Collector's office at Nellore, is returned to the Superintending Engineer, II Circle, for sanction and early execution.

2. To meet the cost of the work, a sum of Rs. 1,150 is appropriated from the Provincial reserve for the Nellore division under Minor Works—Civil Buildings.

(True Extract.)

Under Secy. to Govt., P.W.D.

To the Superintending Engineer, II Circle, with five enclosures.
 „ Examiner, Public Works Accounts.
 „ Revenue Department.

Exd. T. K. Narayana Aiyangar.
Spare Copies

BUILDINGS AND ROADS.
CIVIL WORKS.

Govt. of {1896} Madras.

PUBLIC WORKS.

Dated June, 12th.

Recd.

Encl.

G.O. No. 1751 W., 12th June 1896.

JUNE.

Collector's office at Nellore

Estimate of Rs. 1,150 for improving the Vernacular record-room of the —, returned to the Superintending Engineer, II Circle, for sanction and execution, with the remark that the amount has been appropriated from the Provincial reserve.

8/1 X/ No. 1751 W, dy 12 June 1896. PUBLIC WORKS DEPARTMENT.


PROCEEDINGS OF THE MADRAS GOVERNMENT.

READ the following

Proceedings of the Board of Revenue (Land Revenue) No. 1914, Dated 4th April 1896.
Endorsement thereon in the Revenue Dept. No. 1885 Dated 15 May 1896.

The estimate amounting to Rs. 1,150, for improving the Vernacular record room of the Collector's office at Nellore, is returned to the Suptg. Engineer, II Circle for sanction and early execution.

2. To meet the cost of the work, a sum of Rs. 1,150 is appropriated from the Provincial reserve for the Nellore Division under Minor Works, Civil Building.

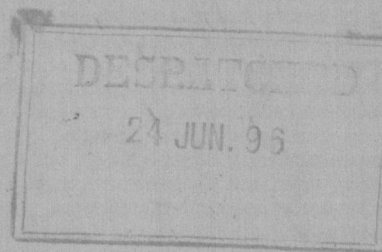

To the S.B. II circle with 5 enclos.
" Inyar P.W. Accts
" Revenue Dept.

CMS
1.6.96.

Cu
CMB

No. 1757 W, of 12 June 1896
Public Works Department.

Current No. 4743
Letter No. 1885 Min.
Dated 15th May 1896
From the Revenue Department.

NOTE BY TECHNICAL SECTION.

Name of work Improving the Vernacular
record room of the Collectors office, Bellare.
amount of estimate Rs 1150,

The plan & estimate have been
framed with reference to G.O.
No. 3231 W dated 17th December 95
and provide for widening the
Vernacular record room of the
Collectors office at Bellare by
9 feet, as per plan submitted.
The soil is reported to be
loamy.

The foundations are to be of
Concrete laid to a depth of 4 ft.
The walls are to be built of latuit
in chunam 18 inches thick &
raised 12 feet to top of joists.
The surface of walls, both interior
& exterior, are to be plastered
with 2 coats of chunam. The
floor is to be of 5 1/4" of concrete
well rammed & the surface
plastered with Portland cement.
The roof is to be tiled with
brick

Estimate for improving
the Vernacular record room
of the Collector's office at
Bellare

T. No.
B. No.

brick on edge laid over teak joists
& wall plates. Doors & windows
are to be of teakwood of the descrip-
tions noted in the estimate.

The scantlings for roof tim-
bers are correct and the rates
are fair.

The estimate is in order.

[Signature]
28.4.56

[Signature]
1.6.96

17574

[Signature]

PROCEEDINGS OF THE BOARD OF REVENUE.

(Land Revenue)

Dated 24th April 1896, No.1914 Mis.

Read the following letter from the Collector of
Nellore to the Secretary to the Commissioners of Land Revenue
Madras, No.642/Eng., dated 16th April 1896:-

With reference to G.O.No.5231 W., dated 17th Decem-
ber 1895, (communicated in B.P.No.68, dated 9th January 1896)
the Superintending Engineer, II Circle, has forwarded a plan
and estimate amounting to Rs.1150 for improvements to the Ver-
nacular Record Room of this office. I have the honor to sub-
mit them duly countersigned with the request that the early
sanction of Government may be obtained thereto.

Resolution:-

The plan and estimate are submitted for the orders
of Government, with reference to G.O.No.5223 Mis., dated 24th
December 1895.

(True Copy & Extract)

/Sd/ R.C.C.Carr,

Ag.Secretary.

To

The Secretary to Government, Rev.Deptt., with Encls.

CMR
21.5.96