

Public Works (1896) Department.

G.O., No. 201

DATED 7-1-96

[Despatch Abstract.]
Rest-house: Estimate of Rs. 1650
for constructing a — at Muchintala,
Munipam Project, Kishna dothem
Dr, sanctioned.

Estimate of Rs. 1,650 for constructing a
— at Muchintala, Muniyeru project, Kistna
Northern division, sanctioned.

No. 20 I., 9TH JANUARY 1896.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Irrigation.
Account.

READ—the following paper :—

From the Executive Engineer, Kistna Northern Division, to the Superintending Engineer, II Circle, dated 11th November 1895, No. 431 S.E.

I have the honour to submit herewith, for your approval, a plan and estimate amounting to Rs. 1,650 for constructing a rest-house at Muchintala on Muniyeru main channel, Muniyeru project, and request that you will be good enough to obtain the sanction of Government for the same from the balance of Rs. 4,110 available for unforeseen works of the Muniyeru project.

ENCLOSURE.

REPORT to accompany the estimate for constructing a rest-house at Muchintala.

The building is provided for, in accordance with the verbal instructions of the Chief Engineer for Irrigation, on inspection of Muniyeru project head works on 12th July 1895.

It is in a good central position for supervising and inspecting from there all the channel works at a distance of more than five miles from the head.

It is proposed that, when built, the rest-house should serve as a residence for the supervisor in charge of the 2nd section of the main channel works during construction and be subsequently used as a rest-house.

The bricks obtainable at site and already purchased are of size $11\frac{1}{2}'' \times 5\frac{3}{4}'' \times 3''$ and $9'' \times 4\frac{1}{2}'' \times 2\frac{1}{2}''$. The former are used for the verandah retaining walls and bath-room walls and the latter $1\frac{1}{2}''$ brick thick for the main walls. The walls are all to be built in chunam as they are somewhat thin for building in mud and the extra cost is not great.

Specification.—Work to be in accordance with standard specification of Madras Presidency.

5th November 1895.

(Signed) W. M. ELLIS, Captain, R.E.,
Ex. Engr., Kistna Northern Division.

No. 1865 K.S.

Forwarded to the Chief Engineer for Irrigation for favour of obtaining the sanction of Government to the estimate, amounting to Rs. 1,650, for constructing a rest-house at Muchintala, Nandigama taluk, from the balance available for unforeseen works of the Muniyeru project, sanctioned in G.O. No. 1089 I., dated 12th December 1893.

1st December 1895.

(Signed) A. S. RUSSELL,
Offg. Suptg. Engr., II Circle.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the

READ the following

From Supp. Encl. No. 1865 K.S. 91 Dec/95

The following estimate is sanctioned from the balance of the amount reserved for unforeseen works of the Muniyuru Project which will then be reduced to Rs. 2460

Irrigation

43. Minor Works Navig. Minor works for which Capital & Rev. Accts are kept.

Capital Account Muniyuru Project.

2. Main Canals & Branches

11. Buildings

Constructing a rest house at Muchintala.

Estimate Rs. 1650

2. This sanction is registered as No.

No. 20 I., 9TH JANUARY 1896.

2

ORDER—No. 20 I., dated 9th January 1896.

The following estimate is sanctioned from the balance of the amount reserved for unforeseen works of the Muniyuru project, which will then be reduced to Rs. 2,460 :—

Irrigation.
43. Minor Works and Navigation.
Minor Works for which Capital and Revenue Accounts are kept.
Capital Account.
Muniyuru Project.
2. Main Canals and Branches.
11. Buildings.
Constructing a rest-house at Muchintala.

Estimate RS.
1,650

2. This sanction is registered as No. 171 I. of 1895-96.

(True Extract.)

Under Secy. to Govt., P.W.D.,
Irrigation Branch.

To the Chief Engineer for Irrigation.
" Superintending Engineer, II Circle, with three enclosures.
" Examiner, Public Works Accounts.
" Revenue Department.


Exd. T. K. Narayana Aiyangar.
Spare Copies.

171 S of 1895-96.

WR
18/11

Recd
19/12

Estimate for constructing
a rest house at Muchintala
Munnigern Project

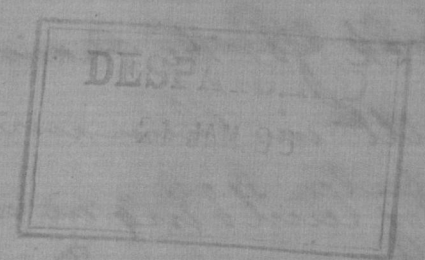

To the Chief Eng for I.
Supp Eng II with 3 encls.
To S. W. R.
Rev Dept.

LCR

E. I. Form No. 1-500-14-5-95

BR
8-7-96

Issue

Recd
8/11

7.5.96

Wes

10/11

Recd

Report to accompany the Estimate for
Constructing a Rest House at Muchintala
The building is provided for in accordance
with the Verbal instructions of the Chief Engineer
for Irrigation on Inspection of Munnigern
Project Head works on 12th July 1895.

4/1799/18
12 NOV

It is in a good central position for supervising
and inspecting from there all the channel
works at a distance of more than 5 miles
from the Head.

It is proposed that when built the
Rest House should serve as a residence
for the Supervisor in charge of the 2nd section
of the main channel works during construction
+ be subsequently used as a Rest house.

The bricks obtainable at site and already
purchased are of size $11\frac{1}{2} \times 5\frac{3}{4} \times 3$ and $9 \times 4\frac{1}{2} \times 3$
The former are used for the Verandah re-
-taining walls and bath room walls and
the latter $1\frac{1}{2}$ Brick thick for the main walls
The walls are all built in chumam as they
are some what thin for building in mud &
the extra cost is not great.

Specification

Work to be in accordance with standard
specification of Madras Presidency.

Wm. Wh. Captain R.E.
Eng Engineer
B/E
5/11/96
Historical Northern Dist

CHIEF ENGINEER
FOR IRRIGATION.
DEC. 95
No. 34-II

P. W. CURRENT No. 10232

From

The Supg Engineer
Second Div

Encls: 4 (11/11)
Acres: 20.12-85

To The Chief Engineer
For Irrigation

No. 1089 D of 12-12-93.

Dated 1 } December 1895
Des. 4 }

Encl. 4

No. 1865 NS

Rest house at Mutchin-
tala in Nandigama Taluq.
Forwarding for sanction
an estimate for
constructing a

11/11/11

