

Public Works (1896) Department.

G.O., No. 13834

DATED 30/4/96

[Despatch Abstract.]

Forest Range office —
Oro Revenue Dept regarding
the construction of the — as a
separate building in the compound
of the Taluk office, Communicated
to officers of the P.W.D.

past the doors of the wards for female prisoners. It would be better, I think, if it can be arranged that the passage to the Forest Range office should not be in front of these cells.

2. The cost of the alternate plan of an up-stairs building being high, I would suggest that the Forest Range office be built at the end of the sub-jail wards as proposed in plan No. I, but that the verandah and doors be placed on the left instead of the right of the Forest Range office. Access to the Range office would then be along the back of the sub-jail wards, instead of along the front of them and, if necessary, a verandah could run along the back of wards so far as the end of the arms room. This would involve 45' of extra verandah, the cost of which is estimated by the Consulting Architect at about Rs. 400.

3. If the cost of 45' of extra verandah is considered to be excessive, it would possibly not be thought objectionable to build the Range office along the right side of that part of the record-room which is lighted from the court yard on the left, just where the section G H is marked on the revised type design.

Resolution—Mis. No. 471, dated 27th March 1896.

The papers read above are submitted to Government with reference to its endorsement No. 2095 R., dated 19th December 1895.

2. Of the two plans forwarded by the Consulting Architect, the cost of the building under design No. 2 which provides for the construction of an upper storey over the "arms room" and the adjoining "jail room" is too expensive and the Board is not prepared to accept it. As regards the first plan, the Inspector-General of Prisons, to whom a reference was made, deprecates the opening of any passage to the Range office past the doors of the jail wards for females and suggests, as an alternative, that the verandah now proposed to be placed to the right of the Range office building be moved to the left and extended, if necessary, to a length of 45 feet so as to meet the verandah at the back of the Sub-Magistrate's Court. Even this latter plan, the Board considers, is not free from objection; for, instead of the doors, the windows of the wards will still open on the proposed verandah.

3. Mr. Cardew also suggests as a second alternative that the Range office rooms might be built along the right side of the record-room block, just behind the wing where the Tahsildar's Court is situated. But this arrangement will, it is feared, seriously interfere with the light and air in the record-room.

4. Taking all these circumstances into consideration, the Board would give up the idea of constructing the Range office as a part of the Taluk cutcherry building, and have it as a separate building, if possible, in the same compound, or, at any rate in the vicinity of the Tahsildar's office. The standard plan for Taluk offices has been prepared according to the original requirements and any addition thereto must tend to spoil the design. Besides, the proposed Range office consists of only two small rooms and it will not cost much to build it separately.

(True Copy and Extract.)

(Signed) R. C. C. CARR,
Acting Secretary.

Mis. No. 1488, Revenue.

Transferred to the Public Works Department, with reference to its endorsement No. 4002 C., dated the 14th December 1895, and with an expression of concurrence in the Board's remarks.

FORT ST. GEORGE,
14th April 1896.

(Signed) LIONEL DAVIDSON,
Ag. Under Secretary to Government.

ORDER—No. 1383 W., dated 30th April 1896.

Communicated to officers of the Public Works Department.

(True Extract.)

Under Secy. to Govt., P.W.D.

To Superintending Engineers.
" the Consulting Architect to Government, with two plans.
" the Revenue Department.

Exd. T. K. Narayana Aiyangar,
Spare Copies

Gobt. of {1896} Madras.
PUBLIC WORKS.

Encl.

G.O. No. 1383 W., 30th Apr. 1896.

APRIL.

Endorsement in the Revenue Department transferring, with an expression of concurrence in the Board's remarks, Board's Proceedings proposing that the — be constructed as a separate building in the compound of the Taluk office or in its vicinity, communicated to officers of the Public Works Department.

(1896.)

REVENUE DEPARTMENT.

From

W. Hov. 2 ca/14-12-95
3521 W of 27-11-95
7312 of 10-8-95

Dated 27th March 1896.

Received 2nd April "

Enclosures Four.

Forest No. 471 Mis.

SUBJECT.

ABSTRACT.

Endorsement NO.1488 Mis.



Daniel Davidson
 15:24

A. V. Read Aug 9698
No. 1383W d/30-April 1866. 2207
Comm'd. to officers
Compromised
of the W. Dept.
after Nov 20 66
27/4/84


John P. Jones
C.A. Tolant
with 2 polans
Rev. Dept.

11 MAY 90
13


Architectural drawing of the interior of the Church of St. John the Baptist, showing the nave and choir. The drawing is a perspective view from the entrance, looking down the nave. The nave is a long, narrow space with a high, vaulted ceiling. The floor is paved with large, rectangular stones. The walls are made of brick or stone, with some decorative elements. The choir is at the far end, featuring a large, arched window and a smaller, arched window above it. The drawing is labeled with dimensions and numbers.

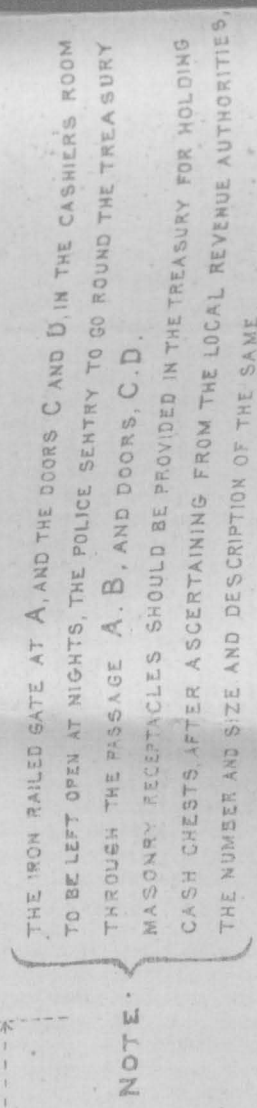

REG: No. 1072 Copies 220

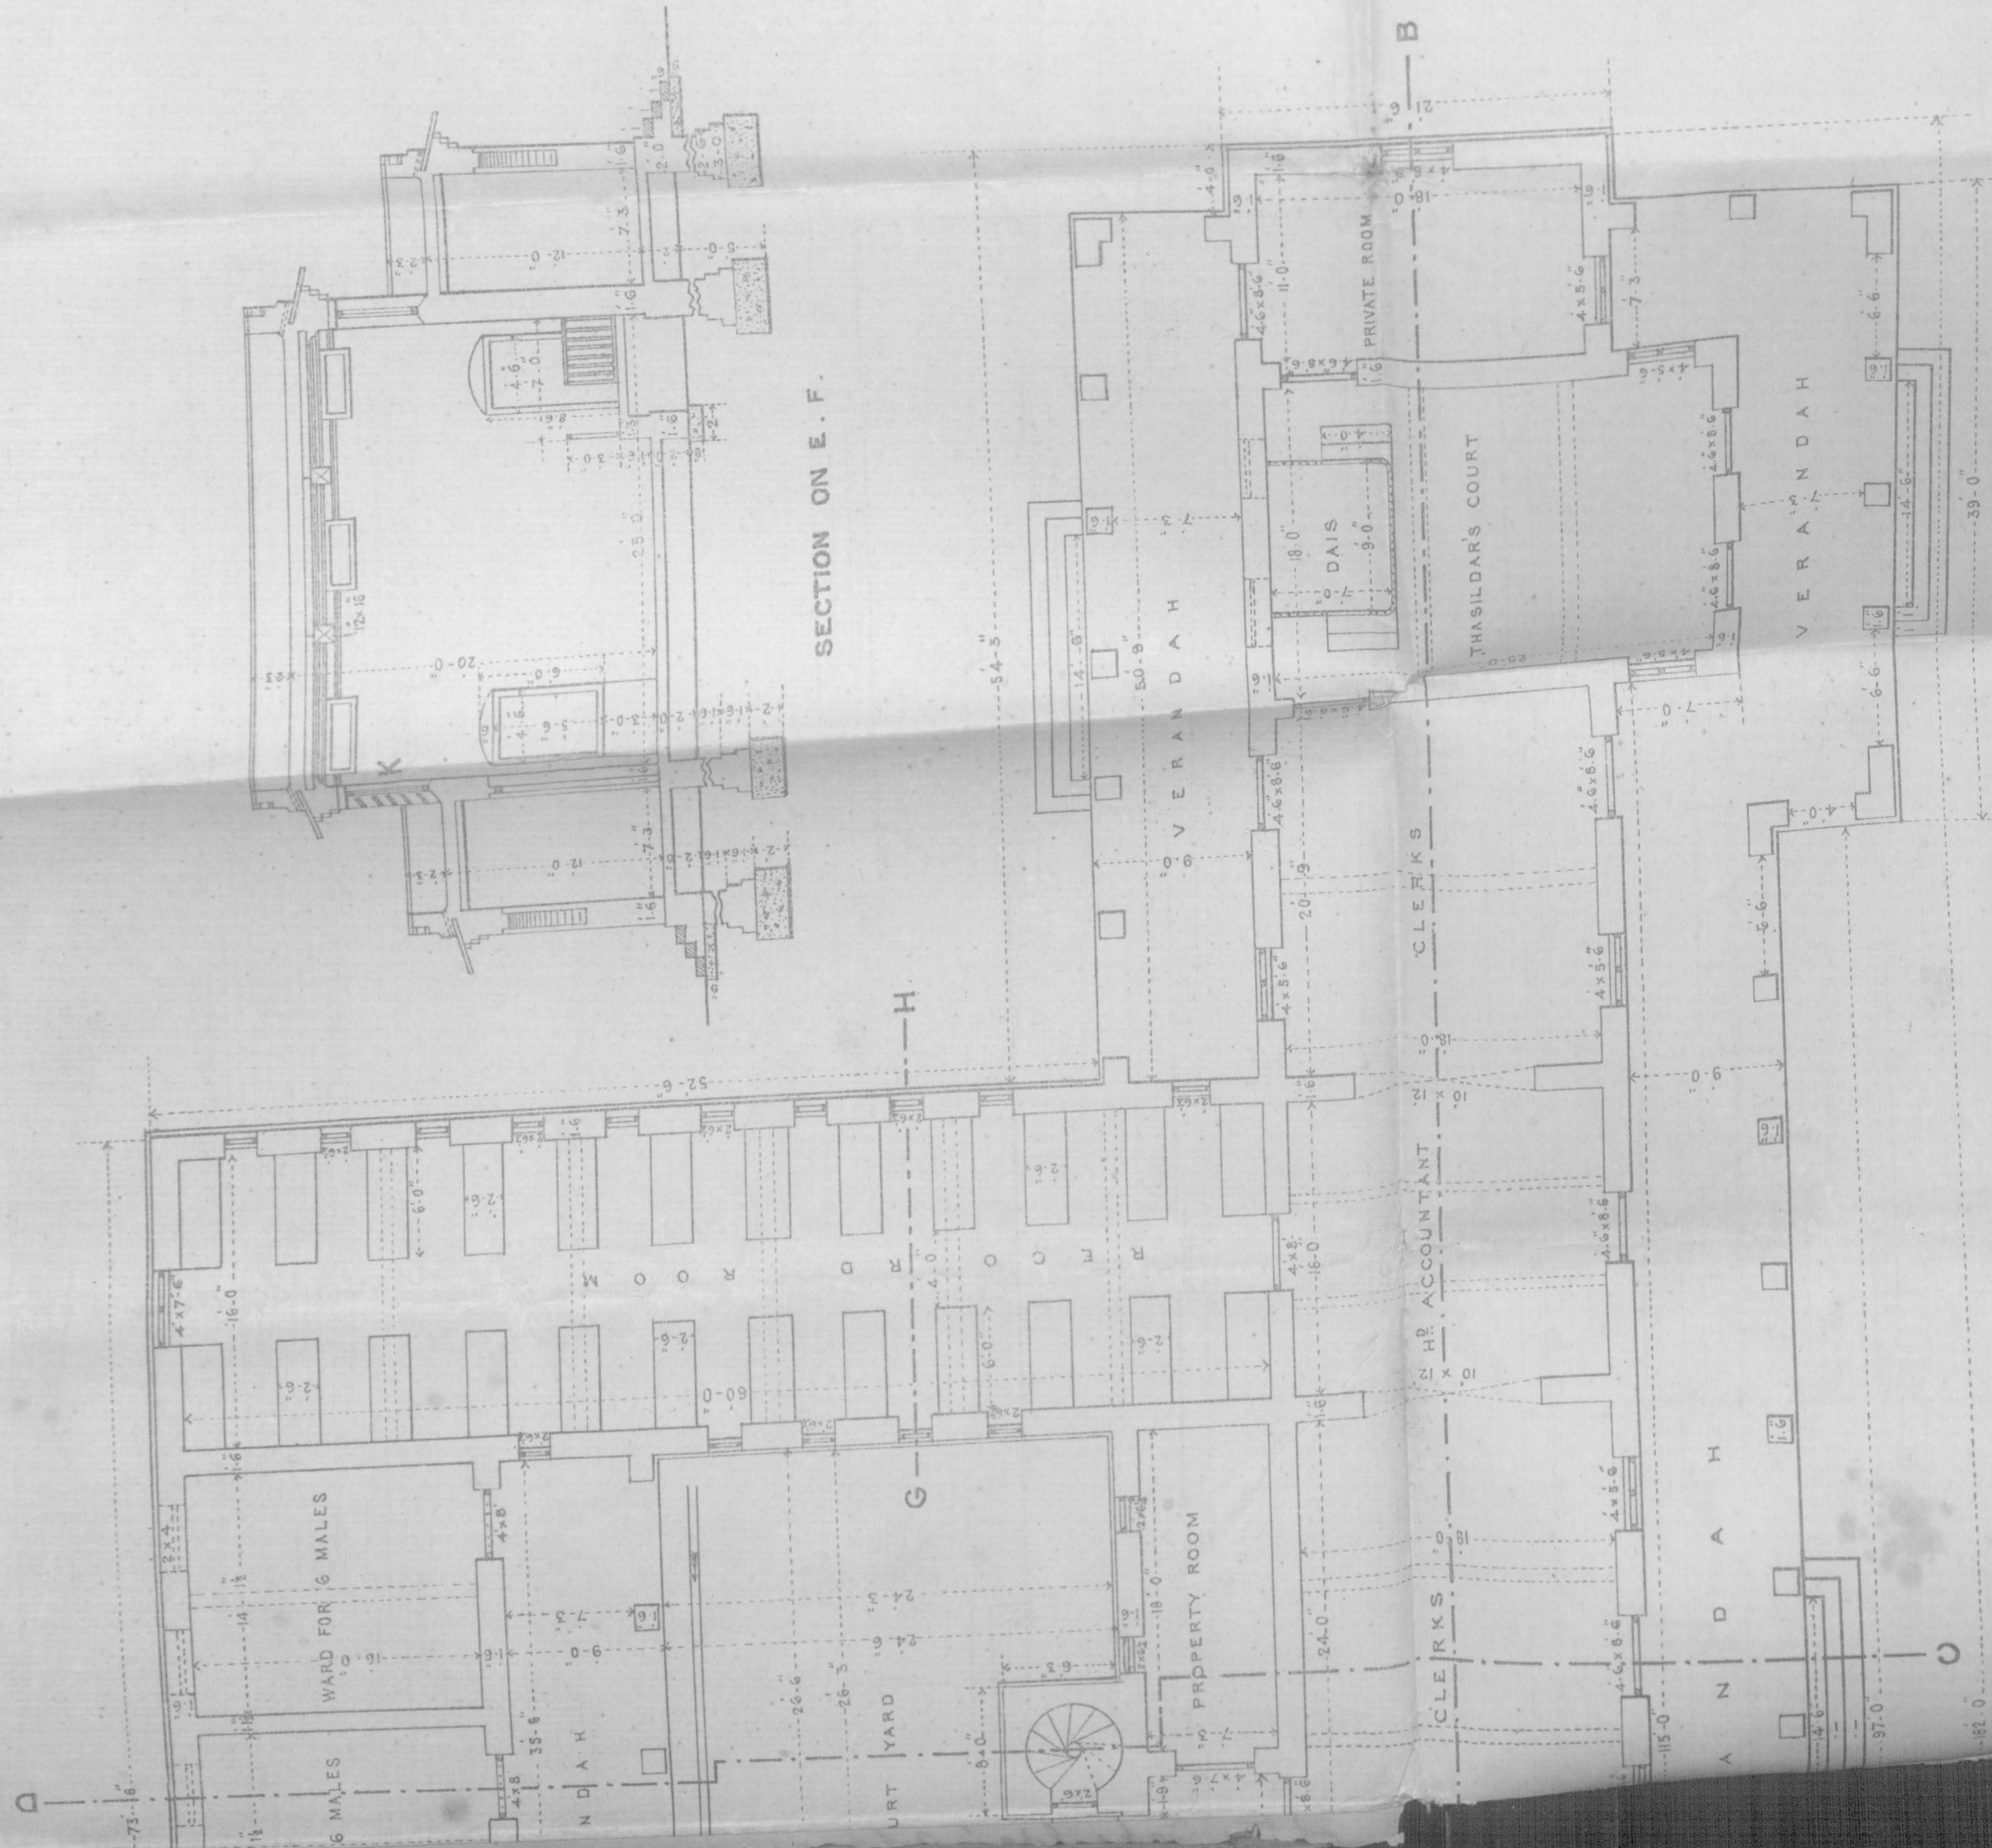

SECTION ON E. F.

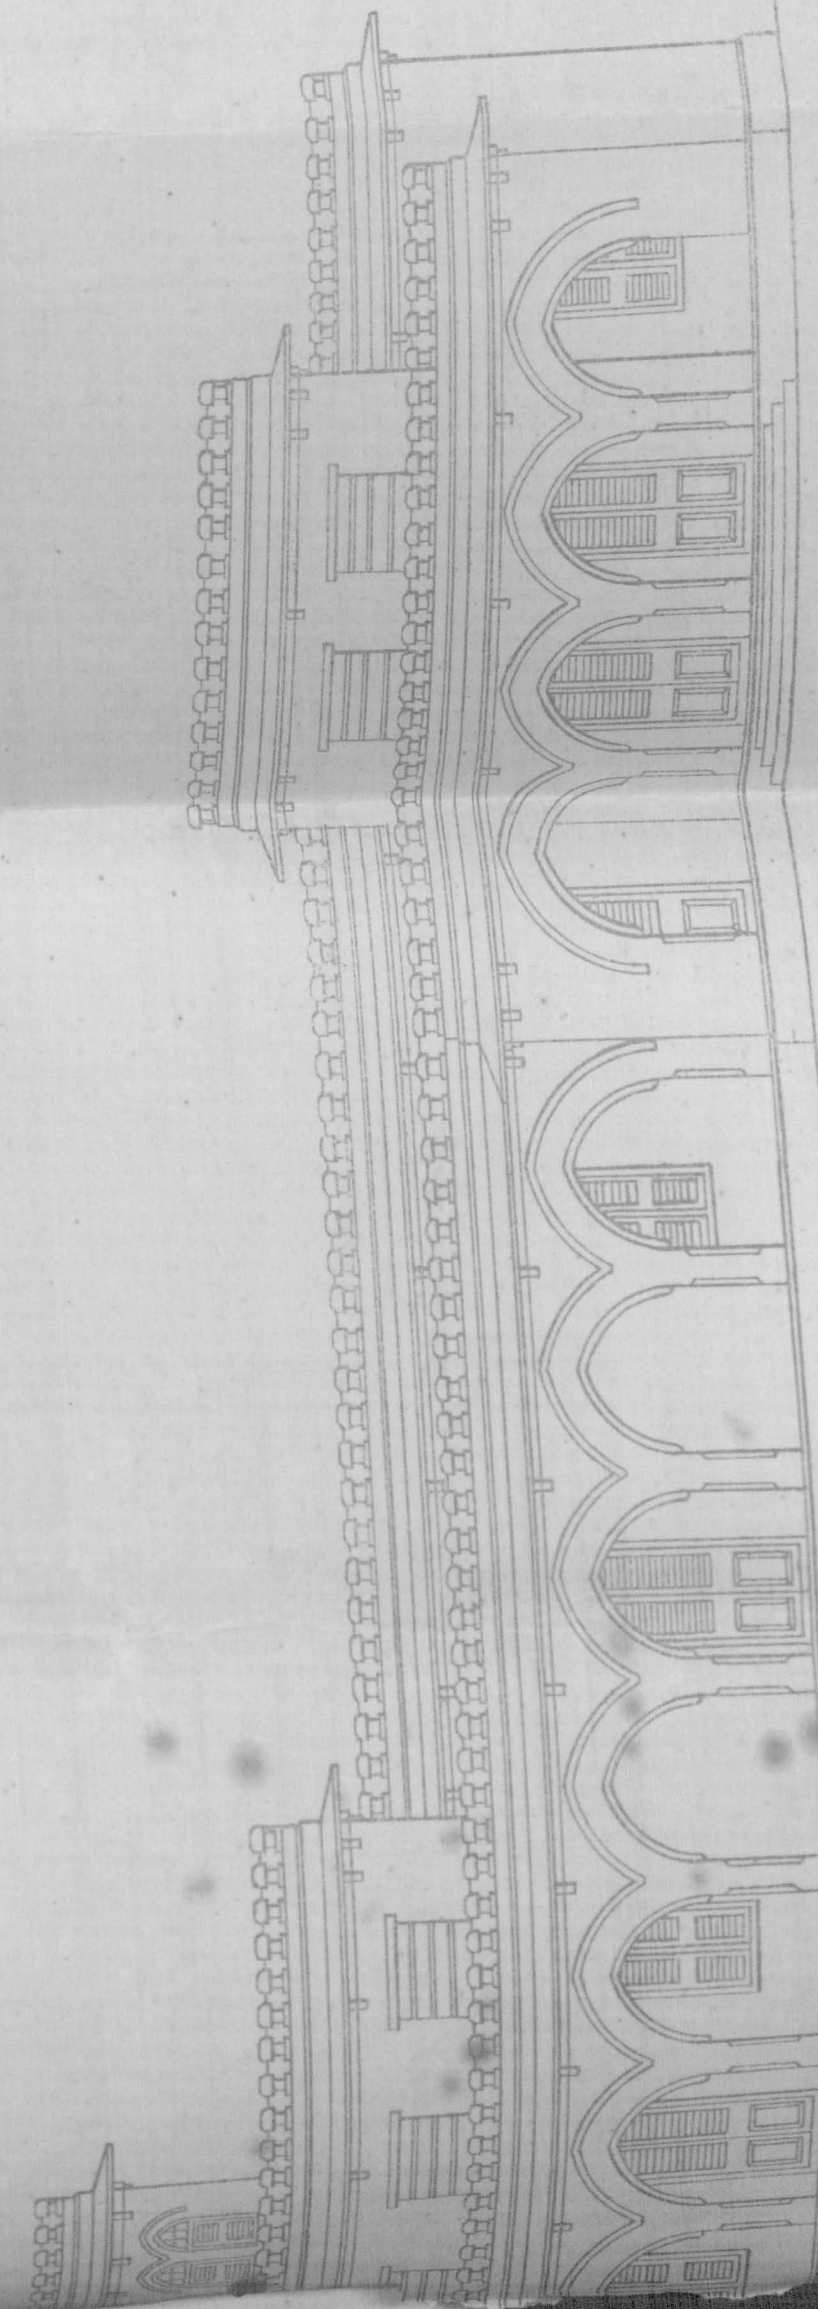

(Signed) H. Irwin C. I. E.
Cong: Architect to Govt.
7th Nov. 1891.

(Signed) O. V. Boddy Major B. E.
Dy: Chief Engineer P. W. D.

ELEVATION
SCALE.

20 30 40 FT.

Office of the Consulting Architect to Govt.,
Chennai, Madras,
5th December 1895.

No. 3542.

From

Henry Irwin, Esq., C.I.C.,
Consulting Architect
to the Government of Madras,

1895

To

The Chief Engineer
Public Works Department

Sir,

With reference to G.O. No 3021 dated
the 27th ultimo, I have the honor to submit plan
showing two methods of providing the
accommodation required for a Forest range
office in Taluk offices. The approximate cost
of the arrangement as per plan No. 1 will amount
to Rs 1200 and Rs 2500 according to plan No. 2

2 Enclosures.

I have the honor to be,
Sir,

Your most obedient Servant,

H. Irwin

Consulting Architect to Govt.

Rev. S. S.
3802/96

standard
Revised plan of Taluk
Cathedral

3
78880 of 96

1896
REVENUE DEPARTMENT
Source No. 3
Receipt No. 2524



Proceedings of the Board of Revenue

(Land Revenue),

Dated 27th March 1896,

No 471 mis

2 P

Read again the following Board's Proceedings Forest mis no 189 dated 7th February 1896.

READ Endorsement by Government Revenue Department dated 19th December 1895 no 2095 R.

Resolution, dated 7th Feb 1896 ^{Forest} mis no 189

Of the two plans submitted by the Consulting Architect, it is proposed in one to add the Range Office to the back of the jailward for females; while in the other, an upper storey is proposed to be built over the "Arms" room and the adjoining "Police" and "jail" rooms.

Of the two plans the Board prefers the former, but on comparing it with the revised type design for Taluk offices it is observed that



On 8/2
3805/96

Letter
Ltr 2775/95

Pw Cms 9648/96

that a doorway between the jail wards and the Range office is proposed to be newly opened. The Range office cannot however be shifted over to the record room wing, because in that case there will be no means of opening Communication between it and the rest of the Cutcherry. In these circumstances, the Inspector General of Prisons is requested to state if he has any objection to the situation of the Range office as a continuation of the Jail Block. The windows between the female ward and the Range office would of course have to be blocked up.

(Free Extract)

(signed) L. M. Wynne
Secretary.

To
The Inspector General of Prisons
with 2 plans and a type design to be returned.

Read also the following letter from A. G.
Cardew Esqre., M. A. I. C. S. Inspector General
of Prisons to the Secretary to the Board of Revenue

dated 5th March 1896 N^o C 378. 38

In returning the Enclosures to Board's Proceedings dated 7th February 1896 Forest N^o 187 mis received on the 18th idem I have the honour to state that it appears ^{to be} objectionable that all access from the Taluk office to the Forest Range office should be past the subjail wards and especially that it should be immediately past the doors of the wards for female prisoners. It would be better I think, if it can be arranged that the passage to the Forest Range office should not be in front of these cells.

2 The Cost of the alternate plan of an upstairs building being high, I would suggest that the Forest Range office be built at the end of the subjail wards as proposed in plan N^o I but that the verandah and doors be placed on the left instead of the right of the Forest Range office. Access to the Range office could then be along the back of the subjail wards instead of along the front of them, and if necessary a verandah could run along the

- the back of wards as far as the end of the Arms Room. This would involve 45' of extra verandah, the cost of which is estimated by the Consulting Architect at about Rs 400.
3. If the cost of 45' of extra verandah is considered to be excessive it would possibly not be thought objectionable to build the Range Office along the right side of that part of the Record Room which is lighted from the courtyard on the left, just where the section G-H is marked on the revised type design.

Resolution No. 171, dated 27th March 1896.

- The papers read above are submitted to Government with reference to its endorsement No 2095 R. dated 19th December 1895.
2. Of the two plans forwarded by the Consulting Architect, the cost of the building under design No 2 which provides for the construction of an upper storey over the "Arms Room" and the adjoining "gail room" is too expensive and the Board is not prepared to accept it. As regards the first plan the Inspector

49

Inspector General of Prisons to whom a reference was made, deprecates the opening of any passage to the Range office past the doors of the gailwards for females and suggests, as an alternative, that the verandah now proposed to be placed to the right of the Range office building, be moved to the left and extended, if necessary, to a length of 45 ft so as to meet the verandah at the back of the Submagistrate's Court. Even this latter plan, the Board considers, is not free from objection, for, instead of the doors, the windows of the wards will still open on the proposed verandah.

3. Mr Cardew also suggests as a second alternative that the Range office rooms might be built along the right side of the record room block just behind the wing where the Tahsildar's Court is situated. But this arrangement will, it is feared, seriously interfere with the light and air in the record room.
4. Taking all these circumstances into consideration, the Board would give up the idea of constructing the Range office as a part of the Taluk Cutcherry.

catcherry building and have it as a separate
building, if possible, in the same Compound,
or, at any rate in the vicinity of the Tahildar's
office. The standard plan for Taluk offices
has been prepared according to the original
requirements and any addition thereto
must tend to spoil the design. Besides,
the proposed Range office consists of
only two small rooms and it will not
cost much to build it separately.

(True Copy and Extract)

Ree can
Ag. Secretary

To
The Secretary to Government
Revenue Department
with the Consulting Architect's letter
and its Enclosures returned.

3 m/s.
ms 47/m
27/12/46

To be returned
to Revenue Board