

Public Works (1898) Department.

✓ G.O., No. 2

DATED 4 January 1898

[Despatch Abstract.]

Masonry Inlet wall: Sanctioning an estimate of Rs. 1250 for constructing a — at 4 m. 2 fur. of Commemur Canal, opposite Gudivada village, Kishu Western Delta.

[P. 1,000]

[P.W. 26
1,000-26-11-98]

Indexed.

100/5
22-12-98
Reported
10
5198

Sanctioning an estimate of Rs. 1,250 for constructing a — at 4 miles 2 furlongs of Commamur canal, opposite Gudivada village, Kistna Western delta.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Irrigation.
Account.

READ—the following papers :—

From W. C. DEMORGAN, Esq., Superintending Engineer, II Circle, to the Chief Engineer for Irrigation, dated Bezwada, 25th November 1897, No. 2360 K.W.

I have the honour to forward herewith, for your approval and sanction of Government, estimate amounting to Rs. 1,250 for constructing an inlet wall at 4 miles 2 furlongs of Commamur canal opposite Gudivada village.

2. The report accompanying the estimate explains the necessity for the work.

3. The amount of the estimate may be met from the balance of the provision of item No. 710 of the statement printed with G.O., No. 857 I., dated 11th October 1893.

ENCLOSURE.

REPORT to accompany the estimate for Rs. 1,250 for constructing an inlet wall at 4 miles 2 furlongs of Commamur canal opposite Gudivada village.

There is a gap here on the right bank of the canal (*vide* enclosed sketch). It is about 100 feet in width and is said to have been brought into existence some ten years ago owing to a breach in the bank, caused by the upland drainage of a little more than half a square mile of flat country. Owing to this, it has been complained that the wet lands of Anumarlapudi and that the principal donka, leading to lands and villages on this side, has to be waded through mud and water, to the great inconvenience of men and cattle.

2. With a view, therefore, to provide for the upland drainage, and to shut out canal water, it has been proposed to close the gap by a masonry inlet wall with its crest 6 inches above the F.S.L. of the canal. This, it is hoped, will, once for all, remedy the evils complained of by the Agrahamandars and the villagers of Gudivada.

3. A lower vent with a tamboje has been provided at the lower end of the inlet wall to let off the drainage water into the canal when possible.

4. The estimate further provides for paved crossings on both sides of the inlet wall to slopes of 1 in 6 for the convenience of people and cattle, which are quite essential.

5. The estimate is recommended for sanction from the balance of the provision under item No. 710 of the project statement printed with G.O., No. 857 I., dated 11th October 1893.

(Signed) W. C. LEWIS,
Ex. Engineer, Kistna Western Dn.

No. 306 I.

Note by the Chief Engineer for Irrigation.

Owing to a breach which occurred about ten years ago in the right bank at 4 miles 2 furlongs of the Commamur canal, opposite Gudivada village, Kistna Western division, the wet lands of Anumarlapudi Agraharam village get submerged every year by the backing up of the canal water. To remedy the evil, it is proposed to close the breach by a masonry inlet wall, with its crest 6 inches above the F.S.L. of the canal, and to provide a lower vent with a tamboje at the lower end of the wall to let off the upland drainage water into the canal when possible, for which the Superintending Engineer submits an estimate of Rs. 1,250. The estimate may be sanctioned.

(Signed) W. HUGHES,
Chief Engineer for Irrigation.

22nd December 1897.

ORDER—No. 2 I., dated 4th January 1898.

The following estimate is sanctioned from the balance of the provision made for item 710 of the statement printed in Proceedings of Madras Government, No. 857 I., dated 11th October 1893 :—

Capital Expenditure not charged to Revenue.

49. Irrigation.
Kistna Delta System.

Western Section.

I. Works.

Commamur Canal.

2. Main Canals and Branches.

8. Escapes.

Constructing a masonry inlet wall at 4 miles 2 furlongs of Commamur canal, opposite Gudivada village.

Estimate	...	...	...	...	...	...	...	...	...	Rs.
										1,250

2. This sanction is registered as No. 143 I. of 1897-98.

(True Extract.)

Under Secretary to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.
" Superintending Engineer, II Circle.
" Examiner, Public Works Accounts.

Exd. T. K. Natayana Aiyangar.

A His Excellency the Governor
Public Works Department
PUBLIC WORKS DEPARTMENT,
Current Number 12730
IRRIGATION BRANCH.
Read 30-12-97

PROCEEDINGS OF THE MADRAS GOVERNMENT.

Constructing a masonry inlet wall
at 4 m. 2 fur. of Commamur Canal
Opposite Gudivada village

UNDER date the 8 P

READ the following

From the Super. Engineer, Second Circle. (H.E. No. 2360-K.W. dated 25-11-97).

No 306 Id/22-12-97

Note by the Chief Engineer for Irrigation.

Being to a breach which occurred about
ten years ago in the right bank at
4 m. 2 fur. of the Commamur Canal,
opposite Gudivada village, Kistna Waters
division, the wet lands of Annamalai
-pudi Agraharam village get submerged
every year by the backing up of the
Canal water. To remedy the evil, it is
proposed to close the breach by a masonry
inlet wall, with its crest 6" above the
F.S.L. of the Canal and to provide a
lower vent with a tamboze at the
lower end of the wall to let off the
upland
drainage water from the lands higher up
into the Canal, when possible, - for
which the Superintending Engineer sub-
mits an estimate of Rs 1250. The
estimate may be sanctioned.

N^o 2 D^o 4.1.98

Order thereon.

The following estimate is sanctioned.

Is fine

W H

25.12.97

NCU

29/12/97

vide letter filed L.

C.S.D.
20-11-97

Public Works (1897) Department.

CURRENT No. 372 KS

From The Deputy Engineer
— Civil.

No. 2360 KW

Dated 25 November 1897

Received 29 — do —

Registered

Enclosures 3

Spare copies

SUBJECT.

Constg: an inlet well
at 4 m 2 ft of Comma-
mar Canal - for was
an estimate for for
approval and sanction
of Govt.

lcs
29/11/97

29/11/97

Order

The estimate has
been checked

Shi
10/12/97

6-12-97
12/12/97

Shi
29/11/97

from the balance of the provision made
for item 710. of the statement printed
in P.M.S. No. 857 dated 11 October

1893: -
Capital Expenditure not charged to
Revenue.

49, Irrigation.
Kistna delta Splein.
Western Section.
I. Works.

Commamur Canal.
2. Main Canals and branches.
8, Socaples.

Constructing a masonry inlet well
at 4 m. 2 ft. of Commamur Canal,
opposite Gudivada village.

Estimate. ————— Rs 1,250

2. This sanction is registered as
No. 143 I. of 1897-98.

17/11/97

W.H.
22/12-97

To The Chief Engineer for Irrigation
- Supp. Engineer, Second Circle.
- Examiner, P.W. Accounts.

20/11/98

lcs
17/11/97
16/12/97

BACK PAPERS.

No.	Date.
	Regd No 4. 11-97

FURTHER PAPERS.

No.	Date.

SUPERINTENDING ENGINEER'S OFFICE,
SECOND CIRCLE, *Bezwada*

No. 2360 KW

DATED 25 November 1897

FROM,

W. C. De Morgan Esquire

SUPERINTENDING ENGINEER,

II CIRCLE.

TO,

The Chief Engineer,
For Irrigation

Enclos: 3

SIR,


with report ~~not returned~~ *as it is printed* I have the honour to forward
data X *with* herewith for your approval and sanction.
Sketch X
Plain X *Tracing of Government estimate, amounting to*
Rs 1250 for constructing an inlet wall
enclosures makes X at 4 miles 2 furlongs of Commandment
to S.E. II Circle opposite Gudivada Village.
with refce to this
letter N. 301 KW 2.
4/2/98
(QW 45 K. 198) - estimate explains the necessity for the
work.

3. The amount of the estimate may
be met from the balance of the provision
of item N. 710 of the Statement, printed
with G. O. N. 8572, dated 11th Oct 1893.

I have the honour to be,
Sir,
Your most obedient servant,

W. C. De Morgan

Superintending Engineer

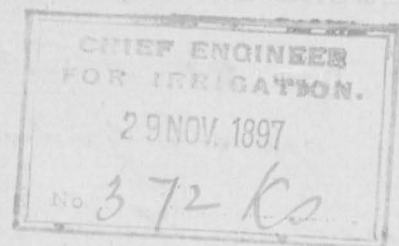

Report to accompany the estimate for Rs 1270
for constructing an Inlet wall at 4 miles & 2 furlongs
of Commamur canal opposite Gudivada Village.
There is a gap here on the right bank
of the canal vide enclosed sketch. It
is about 100 ft in width and is said to
have been brought into existence some
ten years ago owing to a breach in the
bank caused by the upland drainage of
a little more than half a square mile of
flat country. Owing to this, it has been
complained, that the wet lands of Anumarla-
pudi Agraharam Village, are getting submerged
year after year, by the backing up of the canal
water; and that the principal donka, leading to
lands and villages on this side, has to be
waded through mud and water to the great in-
convenience of men and cattle.

2. With a view, therefore to provide for the upland
drainage, and to shut out canal water, it
has been proposed to close the gap by a
masonry inlet wall with its crest 6" above
the H. S. L of the canal. This it is hoped
will once for all remedy the ^{evils} soils complained
of by the Agraharam dars and the villagers
of Gudivada.

3. A lower vent with a tumbidge has been

provided at the lower end of the inlet wall
to let off the drainage water into the canal
when possible.

4. The Estimate further provides for paved crossings
on both sides of the inlet wall with slopes of
1 in 6 for the convenience of people and cattle
which are quite essential.

5. The Estimate is recommended for sanction
from the balance of the provision under item
No. 710 of the project ^{statement} Estimate printed with
G. O. No. $\frac{857}{11.10.73}$.



M. Sear

Executive Engineer.
Kistna Western Dist.

8/2/77

19/1/77