

Public Works (1898) Department.

G.O., No. 267 J

DATED 25 March 1898

25/3/98

[Despatch Abstract.]

Mutha Sagarani Tank, Estimated Rs.
5330 for improvements to — of Totavada
in Vizalapatam D. S. Santhome

100
3

✓
Hid Pb
25/3/98
MSP

SLB

BACK PAPERS.

FURTHER PAPERS.

IRRIGATION.
ACCOUNT.

Government {1898} of Madras.
PUBLIC WORKS.

Recd.

Enclosures

Regd.

{ 1898.

Spare copies

G.O., No. 267 I., 25th March 1898.

MARCH.

Kurmasagaram Tank

Estimate of Rs. 3,330 for improvements to — of Totavada in Vizagapatam division, sanctioned.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Irrigation.
Account.

READ—the following papers:—

From W. C. DeMORGAN, Esq., M.I.C.E., Superintending Engineer, I Circle, to the Chief Engineer for Irrigation, dated Samalcotta, 25th February 1898, No. 1117 V.Z.

I have the honour to submit herewith the marginally-noted plans and estimates for improvements to Kurmasagaram tank in Palkonda taluk, amounting to Rupees 3,330, and to request that you will be good enough to obtain sanction of Government to the same.

1. Constructing sluice No. 1 in the bund of Kurmasagaram tank of Totavada	...	...	...	...	Rs. 660
2. Constructing sluice No. 2 in the bund of Kurmasagaram tank of Totavada	...	...	...	...	420
3. Constructing weir No. 1 in the bund of Kurmasagaram tank of Totavada	...	...	...	...	610
4. Constructing weir No. 2 in the bund of Kurmasagaram tank of Totavada	...	...	...	...	1,640
Total	...	...	...	...	3,330

The necessity for the works proposed is explained in the accompanying report.

ENCLOSURE.

REPORT to accompany the estimate for improvements to Kurmasagaram tank of Totavada.

Amount of estimate	...	...	...	...	Rs. 3,330
--------------------	-----	-----	-----	-----	-----------

This is one of the tanks lately handed over to this department and has no repairs from a very long time, but an estimate amounting to Rs. 1,940 for raising the bund was sanctioned (vide circle register No. 461 of 1896-97), and is in progress.

The tank is one of great importance situated about two miles below a range of hills and receives all the drainage from them. There are two masonry sluices which are in a dilapidated state and it is not provided with any surplus arrangements, but the surplus of the tank at present escaped over low ground at the left flank and at right flank through a breach.

This estimate in consequence provides for constructing two weirs at either end of the bund and to reconstruct the existing ruined masonry sluices.

The whole work will be carried out in accordance with the standard specification.

25th February 1898.

(Signed) P. R. ALLEN,
Executive Engineer.

No. 103 I.

Note by the Chief Engineer for Irrigation.

The accompanying estimates, amounting to Rs. 3,330, submitted by the Executive Engineer in charge, I Circle, provide for improvements to the Kurmasagaram tank of Totavada, Palkonda taluk, Vizagapatam division, one of the tanks lately handed over to the Public Works Department and for which an estimate of Rs. 1,940 for repairs was sanctioned by the Superintending Engineer in 1896-97.

The estimate may be sanctioned.

(Signed) W. HUGHES,
Chief Engineer for Irrigation.

18th March 1898.

ORDER—No. 267 I., dated 25th March 1898.

The following estimate is sanctioned:—

Irrigation.

43. Minor Works and Navigation.

Minor Works for which neither Capital nor Revenue Accounts are kept, P.W.D.

Vizagapatam Division.

Original Works.

Kurmasagaram Tank of Totavada.

Estimate—

	RS.
1. Constructing sluice No. 1 in the bund	660
2. " " No. 2	420
3. " weir No. 1	610
4. " " No. 2	1,640
Total	3,330

2. This sanction is registered as No. 194 I. of 1897-98.

(True Extract.)

Under Secretary to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.

" Superintending Engineer, I Circle,
with fifteen enclosures.

" Examiner, Public Works Accounts.

Exd. Shaik Karim.

Public Works (1898) Department.

CURRENT No. 2736

From The Chief Engineer for Irr.

Order

No. 1039

Dated 18-3-98

Received

Registered

Enclosures 17 (4 blanks)

Spare copies

SUBJECT.

Improvements to the
Karna Sagar tank of
Totavada Palconda Taluq
Vizagapatam Dist. Estimate
of Rs 3330 for — note
recommending for sanction
the —

43, Minor Works & Repairs.
Minor Works for which neither Capital
nor Revenue Accts. are kept.

Kizhappetam division.

Original Works.

Kurmasagarani tank of Totavada.

Estimate-

- | | |
|---|---------|
| 1. Constructing sluice No 1 in the bund - | Rs 660. |
| 2. — do — sluice No 2 — do — | 420. |
| 3. — do — weir No 1 — do — | 610. |
| 4. — do — weir No 2 — do — | 1040. |
| <u>Total 3,330</u> | |

2. This sanction is registered as
No 194 J. of 1897-98.

18/3

88

W.H.

18.3.98

To the Chief Engineer for Bangalore.

- Supp. Engineer, Fish Culti. with 15 enclos.

- Examiner of W. Accounts.

Public Works (1898) Department.

CURRENT No. 7. VZ

From W. De Morgan Esq
Executive Engineer in charge
Civil

Order

No. 1117 V.2

Dated 25th February 1898

Received 7-3-98

Registered

Enclosures 12 (4 Plans)

Spare copies

SUBJECT.

Improvements to Kurmasagarani
Tank of Totavada. Palakonda
Taluk, Kizhappetam District -
Submitting Estimates & plans of
— and requesting to detain
Sanction of Government to

To C.E. I.

W.H. the 1st

18/3/98

BACK PAPERS.

FURTHER PAPERS.

Encls 5 to $\frac{26 \ 117 \ 0.2}{25.2 \ 80}$ of 08.
 Report to accompany the estimate for
 Improvements to Kumasaaram Tank
 of Lotawada.

Average premium
Rs 1540

Expenditure

Amount of list No. 3330-

This is one of the trees lately handed over to this department and has no repairs from a very long time, but an estimate amounting to Rs 1940 for raising the head was sanctioned vide work register no 461 and is in progress.
96-97


The tank is one of great importance situated about 2 miles below a range of hills and receives all the drainage from them. There are 2 masonry sluices which are in a dilapidated state and it is not provided with any surplus arrangements, but the surplus of the tank at present escapes over a low ground at the left ^{flank} and at right ^{flank} through a breach.

This estimate in consequence provides for constructing two Weirs at either end of the bend and to reconstruct the existing ruined masonry sluice

The whole work has been carried out in accordance with the standard specifications

Rose Allen
Executive Engineer

W. C. Demangan

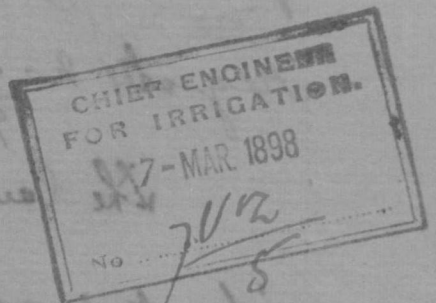

1353/22

No. 1117 V.2

110

Enclos
4 Plans
4 Estimates
1 Report
1 Data sheet
1 Tabular statement
1 General abstract
12

FROM

W. C. Demangan Esq M.T.C.E.
SUPERINTENDING ENGINEER,

FIRST CIRCLE.

Enclosures. 12 TO

THE CHIEF ENGINEER

FOR IRRIGATION.

WALTAIR, Camp Pimulcatta 25² 1898
Canal
Despd 2-3-1898

1. Enclosing No. 1 in the form of Kurma Sagarau Tank of Palarua
2. Do No. 2. Do -
3. Constructing weir No. 1 in the form of Kurma Sagarau Tank of Palarua
4. Do No. 2. Do -
SIR,
Rs 660
Rs 420
Rs 610
Rs 164
Rs 3330

I have the honour to submit herewith the marginally noted plans and estimates for improvements to Kurmasagarau Tank in Palakonda Taluq amounting to Rs 3330 and to request that you will be good enough to obtain sanction of Government to the same.

The necessity for the works proposed is explained in the accompanying report

I have the honour to be
Sir
Yours most obedt Servt
W. C. Demangan
Suptg Engr I Circle

FROM

SUPERINTENDING ENGINEER,
FIRST CIRCLE.

TO

THE CHIEF ENGINEER

FOR IRRIGATION.

DATED

DESPATCHED


RECEIVED

189

No.

ENCLOSURES.

SUBJECT.

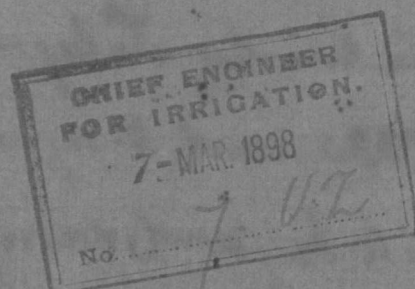

8-4-13
2236/58