

Public Works (1898) Department.

G.O., No. 1/68 J
DATED 18 June 98

[Despatch Abstract.]
Chelva Chin Tamoney Samk : The execution
by the Govt of the Contribution Work of improving
the ——— in the Cochin taluk, Samkones

BACK PAPERS.

IRRIGATION.

Government { 1898 } of Madras.
PUBLIC WORKS.

Recd.

Regd.

} 1898.

Enclosures

Spare copies

G.O., No. 468 I., 18th June 1898.

JUNE.

Chelvachintamony Tank

The execution by the Public Works Department of the contribution work of improving the — in the Coimbatore division, sanctioned.

GOVERNMENT OF MADRAS.

PUBLIC WORKS DEPARTMENT.

Irrigation.

READ—the following paper:—

From A. H. GARRETT, Esq., Superintending Engineer, IV Circle, to the Chief Engineer for Irrigation, dated Camp Anamalais, 2nd June 1898, No. 106/J.

I have the honour to submit herewith the plans and estimate amounting to Rs. 640 for improvements to Chelvachintamony tank, and request you will be good enough to obtain sanction of Government to execute the work from contributions (*vide* paragraph 79, chapter IX of the Public Works Code).

There is a balance of Rs. 218-10-2 available for this work out of the deposit of Rs. 365 received from the Coimbatore Municipality for carrying out the work of "excavating a channel to irrigate lands under the tank" authorized in G.O., No. 2672 W., dated 19th September 1896. The Municipality has agreed to contribute the difference, viz., Rs. 421-5-10, to meet the cost of improvements now proposed.

ENCLOSURE.

REPORT accompanying Estimate for Improvements to the Chelvachintamony Tank, Rs. 640.

The object of the tank, as reported by the Chairman of the Municipality, is simply to form a reservoir for the use of the town, no irrigation whatever being allowed under it. The improvement consists in simply rendering the tank safe by excluding all flood water or drainage, and by means of a sluice admitting only sufficient to fill the tank and so render it safe from breaches; in order to do this, the estimate provides for forming a bank along the northern margin and so enclose the whole waterspread and constructing a sluice in the new bank at a point, as will be seen from the sketch attached, which will admit of sufficient water to fill the tank, and when this is done the sluice may be closed by means of needle shutters and any further supply cut off.

(Signed) T. G. BLAKE,
Sub-Divisional Officer.

23rd February 1898.

ORDER—No. 468 I., dated 18th June 1898.

The execution by the Public Works Department of the work referred to is sanctioned.

(True Extract.)

Under Secretary to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.

- " Superintending Engineer, IV Circle, with six enclosures.
- " Examiner, Public Works Accounts.

Exd T. K. Narayana Aiyangar.

Public Works (1898) Department.

CURRENT No. ~~21. C. 9~~

5104

Order

The execution by
the P. W. D. of the work
referred to is sanc-
tioned.

From The Supp. Engineer,
4th Circle

No. 106

Dated

2nd June 1898

Received

2nd June 1898

Registered

17. 6. 98

Enclosures

3 (3 plans)

Spare copies

SUBJECT.

Chelvachintamony tank
Submits plans & estimate
amtg. to Rs 640 for improving
the — with a request to
obtain sanction of Govt
to execute the work from
Contributions.

To

The Chief Eng. for I.

Supp. Eng. IV Circle
Sd/- P.W.D.

1000
11/6/98

1000
11/6/98

1000
11/6/98

1000
11/6/98

Report accompanying estimate for improvements
to the Chelsea Chertanning Lock No 640.

The object of the work as reported by the Chairman of the Municipality is simply to form a reservoir for the use of the Town, no irrigation whatever being allowed under it - The improvement consists in simply rendering the ^{Tank} safe by excluding all flood water or drainage; & by means of a sluice admitting only sufficient to fill the Tank and so render it safe from breach - in order to do this the estimate provides for forming a bank along the Northern margin and so enclose the whole water space and constructing a sluice in the new bank at a point as near to the dam as the sketch attaches which will admit of sufficient water to fill the Tank and when this is done the sluice may be closed by means of a wooden shutter & any further supply cut off - Early sanction to the estimate is urgently solicited so that the complete balance of the 1899 may be attached before the end of the financial year the plans herewith are approved the balance may be worked into next year

Shulak
S. av
23/2/88



"Encls: No 2 to letter No 106"

No 106
L

Supg. Engineer's Office 4th Circle
Camp at Namalais 2nd June 1898

From,

A. H. Garrett Esq.
Superintending Engineer 4th Circle

To,

The Chief Engineer
for Irrigation.

Sir,

Enclosures 5.


1. Estimate
2. Report
3. Drawings.

I have the honor to submit herewith the plans and estimate amounting to Rs 640 for improvements to Chelachintamani tank and request you will be good enough to obtain sanction of Government to execute the work from contributions, vide para 79 Chapter IX of the P. W. Code.

There is a balance of Rs 218-10-2 available for this work out of the deposit of Rs 365 received from the Coimbatore Municipality for carrying out the work of "Excavating a channel to irrigate lands under the

0251
5104/98

the tank" authorized in G. O. No. 2672 W, dated
19th September 1896. The Municipality has
agreed to contribute the difference viz \$421-5-10
to meet the cost of improvements now
proposed.

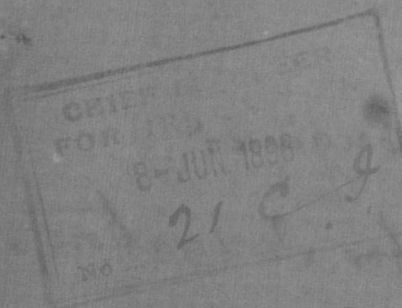

I have the honor to be,
Sir,
Your most obedt. servant

Amund
Sup^g Engineer & Circle.

P
305
95

41