

Public Works (1898) Department.

G.O., No. 929 J
DATED Dec 1/98

2/12/98
3/12/98

5/12/98

[Despatch Abstract.]

Mela Kallur Puduku lam Tank
Estimate Rs 4370 for
Strengthening & improving the _____ in
the Pinnerelly Dr, Sanctioned

100
/ 4

Registered
2/12/98

Indexed 3/12

22.7.
2/12/98

Estimate of Rs. 4,370 for strengthening and improving the — in the Tinnevely division, sanctioned.

No.	Date.
1736h	8-9-83

No.	Date.

No. 814.T.N.


Superintendent's Office, 6 Circle
Pichinopoly. 18th October 1898.
2719.

From

Lt Col. C. T. Booder R.E.
Superintendent, 6 Circle

L

The Chief Engineer
for Irrigation

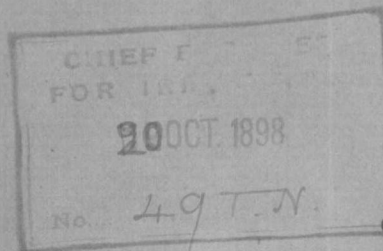

Sir,

Enclosures:

2. Level Section
1. Estimate with report & description of the work to be done between the Engrs & Collector.

I have the honor to submit for sanction of Government an estimate amounting to Rs 4,370 for strengthening and improving Melakallur Peder-kulam tank in the Ambasamudram Taluk of the Tinnevely District.

2. This is an imperial tank bearing No. 144 A in the list and commands an area of 256 acres.

3. It was newly constructed in the year 1883 on an estimate of Rs 11,000 sanctioned in G.O. No. 3194 dated 11 November/74 which was subsequently revised to Rs 13,868 and sanctioned in G.O. No. 723 I of 7 September 1883. It will be seen that owing to the inferior

description of soil of which the bund was constructed breaches have occurred year after year entailing great loss to the ryots. The agent statement furnished by the Collector attached to the estimate shows that the full ayacut has never been cultivated, the greatest extent, since the tank was constructed, having been 97.19 acres in fasli 1304.

4. The question as to whether the tank should be abandoned or another attempt made to improve it has formed the subject of correspondence between the Collector and the Executive Engineer, and the conclusion arrived at by them is that improvements to the tank should be undertaken. The Collector considers that if the tank is improved and made safe, the irrigable ayacut will be 156 acres with a total revenue derivable of Rs 785. This will represent a return of 4.45 per cent on the total outlay. The proposed works are, raising the tank bund where necessary with a top width of 6 feet

and side slopes 2:1 having a margin of 2 1/2 feet, providing rough stone revetment between cross sections 4 and 5, and again from 9 to 19 & gravelling the top and slopes of bund.

5. The rates are fair and the estimate is recommended for sanction.

I have the honor to be,
Sir,

Yr most obedt Servant.

J. V. Boddy Esq. D.O.
Superintendent, Civil

[Signature]

IRRIGATION.
ACCOUNT.

Government {1898} of Madras.
PUBLIC WORKS.

Recd.

Regd.

} 1898.

Enclosures

Spare copies

G.O., No. 929 I., 1st December 1898.

DECEMBER.

Melakallur Pudukulam Tank

Estimate of Rs. 4,370 for strengthening and improving the — in the Tinnevely division, sanctioned.

25/12/98

Order thereon No. 9292 of 1.12.98.

The following estimate is sanctioned:—

Irrigation

43. Minor works and Navigation

Minor works for which neither Capital nor Revenue Accounts are kept, P.W.D.

Original works

Tinnevely Division.

Strengthening and improving Melakallur Pudukulam tank, No. 144 A. of list of Minor works Public works Department, Tinnevely Division.

Estimate Rs. 4370.

2. This sanction is registered as No. 99.I of 1898.99.

12/11/98

11/11/98

in 8/11/98

with 13 enclosure

To, The Chief Engineer for Irrigation
" Supy. Engineer for Civil
" Examiner P.W. Accounts

10/11/98
20/11/98

Sanctioned
23.11.98

U P