

8858
Public Works (1896) Department.

G.O., No. 8563

DATED 22nd October 1896

[Despatch Abstract.]

Badamagunta Tank, Estimate of Rs.
2780 for improvements to —, Nellore
Division, sanctioned.

T.C. 22/10

Government { 1896 } of Madras.
PUBLIC WORKS.

Spare copies

OCTOBER.

Estimate of Rs. 2,780 for improvements to —, Nellore division, sanctioned.

No. 856 of 22nd October 1896.
 PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the

READ the following

From Sapp. Exp. P. Cuch, no. 378 N. L. 9/15.9.96

The following estimate is sanctioned.
Irrigation.

43. Minor works Navig.
c Minor works for which
neither Capital nor Rev.
Accts are kept, D.W.D.
Original works.

Improvements to Buda-
magunta tank, No
48 of the list of work
in the Nelson D. appended
to G.O. No 407. I & C
July 187-

Estimate No 2780

2. This function
is registered as h.
121 I of 1876-97.

70

The Chief Sup for J. 7 is registered as h.
Sup for II with 6 encls. 121 J of 1876-97.
S. S. W. 9/11 1876 (P. 10)

L.C.S.
2679 *Rio*

No. 856 I., 22ND OCTOBER 1896.

GOVERNMENT OF MADRAS.
PUBLIC WORKS DEPARTMENT.

Irrigation.
Account.

READ—the following paper:—

From Major W. L. C. BADDELEY, R.E., Superintending Engineer, II Circle,
to the Chief Engineer for Irrigation, dated Bezwada, 18th September 1896.
No. 378 N.L.

I have the honour to forward herewith, for your approval and sanction of Government, plans and estimates, amounting to Rs. 2,780, for the improvements of Budamagunta tank, Nellore district.

2. The report which accompanies the estimate explains the necessity for the work.

ENCLOSURE.

REPORT to accompany the plans and estimates for the Budamagunta tank improvements.

Amount of estimate	Rs.	2,780
Ayacut	ACS.	419
Assessment	Rs.	1,703
No. 48 of Imperial list of tanks.		
Date and cost of last repairs—1894-95—Rs. 60.		

Total extent of cultivation and amount of revenue realized during the last five years :—

Faslis.				ACS.	Rs.
1300	..	..	..	396	1,522
1301	..	..	..	424	1,343
1302	..	..	..	424	1,797
1303	..	..	..	432	2,034
1304	..	..	..	521	1,989

This tank was thoroughly repaired in 1884, 1885 and 1886, when a portion of the bund was provided with revetment. The portion which was not then revetted is now considerably eroded and requires to be revetted. The estimate provides for the above work, for wedging the old revetment and for turving the bund above the revetment.

3rd April 1896.

(Signed) R. A. SRINIVASA AIYANGAR,
Assistant Engineer.

ORDER—No. 856 I., dated 22nd October 1896.

The following estimate is sanctioned :—

Irrigation.

43. Minor Works and Navigation.

Minor Works for which neither Capital nor Revenue Accounts are kept, P.W.D.

Original Works.

Improvements to Budamagunta tank, No. 48 of the list of works in the Nellore division, appended to G.O., No. 407 I., dated 6th July 1887.

[illegible]

2. This sanction is registered as No. 121 I. of 1896-97.

(True Extract.)

Under Secretary to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.

„ Superintending Engineer, II Circle, with seven enclosures.
 „ Examiner, Public Works Accounts.

Exd. T. K. Narayana Aiyangar.

Public Works (1896) Department.

Receipt
CURRENT No. 8858
7642

Order

From

The Supg Engineer
Second Circle

No. 37812.

Dated /8- 9. 56

Received 2. 10. 96

Enclosures 7. 8 (3 Plans)

Spare copies

SUBJECT.

Budamagunta tank.
Relieve the forwards
for approval and sanction
plans and estimates
amounting to Rs 2700 for
the imp'ts of —

7.8.96
21/10

CCS
21/10

L.S. 466

Bizwada

Dated 18 September 1896.

From,

Major W. C. Baddeley

~~Esquire, R. E.~~

Superintending Engineer,

II Circle.

To,

The Chief Engineer,
For Irrigation,
Madras.

Encls: 7

Sir,

3 Tracings

1 or 4 sub

1 Data

1 Reports

1. Harvard Statement

11


Sir,
I have the honor to forward
herewith for your approval and sanction
of Government plans and estimates
amounting to Rs 2780 for the improve-
ments of Budawagnika tank.
Believe me &c.

Shave the hair on the
Lv

Your most obed^t servant,

Wm Baddock Major Genl.

Supinger II Child

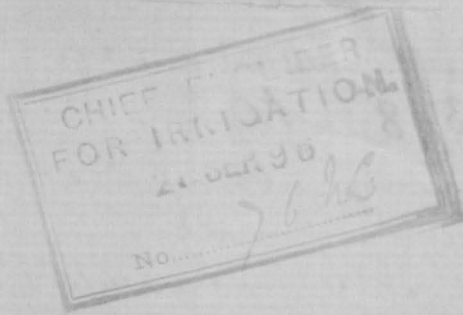

RS.

From,

The Superintending Engineer,

II Circle.

To,

The

Dated

Received

Enclosures

NO.

SUBJECT.

Total extent of
Cultivation and
Amount of Revenue
realized during
the last five years

Year	Extent in acres	Revenue
1300	396	1522
1301	424	1343
1302	414	1797
1303	432	2034
1304	521	1989

8585
1737

P. W. D. Second Circle.
Budamagunta Tank Improvements.
Amount of Estimate Rs 2780/
Agent acres 419 Assessment Rs. 1703/
No 48 of Imperial List of Tanks

Date and Cost of Last Repairs Rs 60
1894-95

Report

To accompany the Plans & Estimates for the

This tank was thoroughly
repaired in 1884-85 when a portion of the
bund was provided with revetment. The
portion which was not then revetted is
now considerably eroded & requires to be
revetted. The Estimate provided for the
above work, for widening the old revetment
and for keeping the bund above the revetment.

P. C. Minisam Angappa
J. H. 56
Ant. Ang