

G.O., No. 887-8.

DATED 28th October 1896

[Despatch Abstract.]

Channels: Estimates aggregating Rs. 4,620 for distributary — from 4th branch channel to Pothumboo West and East Tanks, Periyar Project. Sanctioned subject to the approval of the Govt of India to the proposed redistribution of the sanctioned amount for direct ~~and~~ charges of the Project.

Channels: Forwarding Rs. Sanctioning with remarks Estimates aggregating Rs. 4,620 for distributary — from 4th branch channel to Pothumboo West & East Tanks, Periyar Project.

T.C. 28/10

29/10

80

Government { 1896 } of Madras.
PUBLIC WORKS.

Spare copies

OCTOBER.

Forwarding Proceedings sanctioning, with remarks, estimates aggregating Rs. 4,620 for distributary — from 4th branch channel to Pothumboo west and east tanks, Periyár project.

GOVERNMENT OF MADRAS.
PUBLIC WORKS DEPARTMENT.

Irrigation.
Account.

READ—the following papers :—

From W. HUGHES, Esq., Superintending Engineer, VI Circle, to the Chief Engineer for Irrigation, dated Trichinopoly, 30th August 1896, No. 1090 M.D.

I have the honour to submit for sanction two estimates amounting to Rs. 3,450 and 1,170, respectively, for the distributary channels from 4th branch channel to Pothumboo west and east tanks in the Madura taluk, Periyár works.

ENCLOSURES.

REPORT to accompany the estimate for constructing distributary to Pothumboo east tank from 3 miles 7 furlongs of the 4th branch channel.

							RS.
Amount of estimate	...	...	...	...	...	...	1,170

The distributary runs alongside the 4th branch channel and supplies 600 acres, of which 420 are dry lands and 180 are the ayacut of Pothumboo east tank, which, together with the channel, will be maintained by the Public Works Department.

The estimate provides for two drops and the necessary pipe-sluice and field channels. The work will be carried out in accordance to the standard specifications.

The estimate provides for distributary from 3 miles 1 furlong of the 4th branch channel to Pothumboo west tank.

							RS.
Amount of estimate	***	***	***	***	***	***	3.450

The distributary to irrigate 600 acres, of which 370 acres are dry lands above the tank and 230 acres of land is the ayacut of the tank; both tank and channel will be maintained by Public Works Department.

The estimate includes one culvert for passing drainage at 1 mile 420 feet, four drops and the necessary pipe-sluices and field channels.

The work will be carried out in accordance with the standard specification.

ORDER—No. 887 I., dated 28th October 1896.

The following estimates are sanctioned, subject to the approval of the Government of India to the redistribution proposed in Proceedings of Madras Government, No. 816 I., dated 9th October 1896, of the total amount sanctioned for direct charges of the Periyár project :—

Capital expenditure not charged to Revenue.

49. Irrigation.	
Periyár Project.	
I. Works.	
3. Distributaries.	
4th Branch Channel.	

Distributary to Pothumboo west tank from 3 miles 1 furlong.

	RS.	RS.	RS.
2. Land—			
(1) Compensation for land	236		
	—	236	
3. Works—			
(2) Four feet drop	270		
(3) Six „ „	370		
(4) Two „ „	190		
(5) Culvert	440		
(6) Tail drop „	50		
(7) Twelve 6-inch pipe-sluices	396		
	—	1,716	
4. Earthwork—			
(8) Cutting distributary	1,430		
	—	1,430	
5. Miscellaneous—			
(9) Furlong and demarcation stones	68		
	—	68	
			3,450

Distributary to Pothumboo east tank from 3 miles 7 furlongs.

2. Land—					77	
(10) Compensation for land	...	...	...	...	—	77
3. Works—						
(11) One 12-inch pipe-sluice		...	...	...		60
(12) One 9-inch "	...	...	...	...		55
(13) One 6-foot drop	...	...	...	...		370
(14) Two 6-inch pipe-sluices		...	...	...		66
(15) One tail drop	...	...	...	...	—	50
						601
4. Earthwork—						
(16) Cutting distributary	...	...	...	...	—	449
5. Miscellaneous—						
(17) Furlong and demarcation stones		...	...	...	—	43
					—	43
						1,170
						—
					Total	4,620

2. This sanction is registered as No. 131 I. of 1896-97.

3. Ordered that a copy of these Proceedings be forwarded to the Government of India for information.

[Here enter No. 888 I., dated 28th October 1896.]

(True Extract.)

(Signed) W. HUGHES,
Joint Secy. to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.
Superintending Engineer, VI Circle, with sixteen enclosures.
" Examiner, Public Works Accounts.

ENDORSEMENT—No. 888 I., dated 28th October 1896.

Forwarded.

(By order.)

Joint Secretary to Government,
Irrigation Branch.

Exd. T. K. Narayana Aiyangar.

10. 8872 to 28th October 1896.
 PROCEEDINGS OF THE MADRAS GOVERNMENT.

UNDER date the 5-10

Read the following

From Subg. Engr. V. C. Engr. no 1090 M.D. of 30. 8. 96

The following estimates are sanctioned, subject to the approval of the Govt. of India to the re-distribution proposed in P. Engr. no 870 I & 9/10/96 of the total amount sanctioned for direct charges of the Periyar Project:-

Capital Expenditure not charged to Rev.

to G. Digestion.

Periyar Project.

I. Works.

3. Distributaries

W. Branch channel.

Distributary to

Pothumbos West tank from 3 miles

1 furlong —

Issue

W.H.

15/10/96

For V. C. Engr.

1. Land. 1. Compensation land	Rs 236	236
3. Works. 2. 4 ft drop	270	
3. 6 ft do	370	
4. 2 ft do	190	
5. Culvert	440	
6. Tail drop	50	
7. 12. 6 inch pipe sluices	396	1716
4. Earthwork 8. Cutting distributary	1430	1430
5. Muzallam 9. Furlong & demarcation stones	68	68
Distributary to Pothumbar East bank from 3 miles 7 furlongs		3450
2 Land. 10 Compensation land	77	77
3. Works. 11 One 12 inch pipe sluice	60	
12 One 9 - do	55	
13. One 6 ft drop	370	
14. Two 6 inch pipe sluices	66	
15. One tail drop	50	
4. Earthwork 16. Cutting distributary	449	601
5. Muzallam 17. Furlong & de- marcation stones	43	43
		1170
		<u>Total 4620</u>

2 This sanction is
registered as N. 13/9
of 1896-97.

3 Ordered that a
copy of these Procs. be
forwarded to the Govt

of India for information.
12/8/96 28th October 1896.
Indorsement.
Forwarded.

17/12
96
22/9
96

24/11/96
To
The Chief Eng for I
Sub Eng VI with 16 enclos.
Sd/- F.W.S.
10/11/96

No. 1090 md,

Trichinopoly, 30 August 1896.

From W. Hughes Esq.
The Speriending Engineer,
6th Circle.

To The Chief Engineer. for Irrigation.
Madras.

SIR,

ENCLOSURES. 10

- 2 Estimates complete.
- 8 Drawings.

I have the honour to submit for sanction 2 Estimates amounting to Rupees 3,450 + 1,170 respectively for the distributary channels from 4th branch channel to Pothumboo west and East tanks in the Madura Taluq. Periyar works.


I have the honor to be
Sir
your most obt^d serv^t

W. Hughes
Sup^d Engineer
6th Circle.

7.5.9.
22/10
VLL
25/10
Rgd
28/10

P. W. D. 6th CIRCLE.

FROM

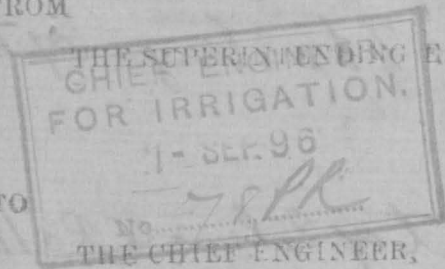

TO

6th CIRCLE.

for large

NO. 1090 md

Dated. 30
Receive 31 } August 1896.

Enclosure. 10

Distributary channels
from 4th Branch channel
to Pothumbur weah & East Tanks.

submitted for sanction

2 estimates Rs 3450 & 1170

for the —

Report to accompany the estimate
for constructing distributary to Padumbu
East Tank from 3 miles 7 furlongs of the
IV Branch Chl.


Amount of estimate Rs 1170.

The distributary runs alongside the 4th
Branch Chl and supplies 600 acres of
which 420 are dry lands and 180 are
the ayacut of Padumbu East Tank which
together with the Channel will be
maintained by the P.W.D.

The estimates provides for two drops
and the necessary pipe sluice and
field channels.

The work will be carried out in
accordance to the Standard Specifica
tions.

Ex Engineer
Spel. Duty.

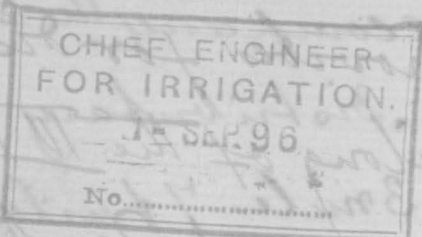

The Estimate provides for Distributary
from 3 miles Bulong of the IV Branch
Chl. to Padumbu West Tank.

amount of Estimate ³⁸⁰
Rs 3350.


The Distributary to irrigate 600
acres of which 370 acres are dry
lands above the tank and 230 acres
of land is the aspect of the tank
Both Tank and Channel will be
maintained by P.W.D.

The Estimate includes Culvert
for passing drainage at 1 mile
420 ft 4 drops and the necessary
pipe sluices and field Channels

The work will be carried out in
accordance with the Standard
Specification.

Engineer
Sp. Duty

0655
8740796

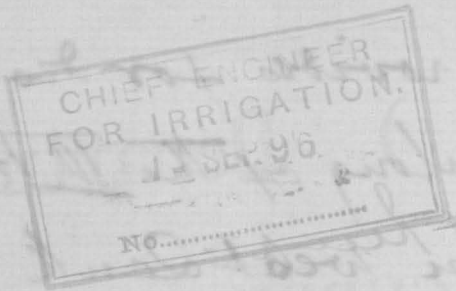

Public Works (1896) Department.

Receipt
CURRENT No. 8740
78PR

Order

From

The Supg Engineer
of Circle

No. 1090 W 2

Dated 30. 8. 96

Received 30. 9. 96

Enclosures ~~10~~ 18 (8 Plans)

Spare copies

SUBJECT.

Distributary Channels
from 4th branch channel
to Pothumbos west of the
Submits for sanction work
Estimates of Rs 2450 + 1170
for the —

BACK PAPERS.

FURTHER PAPERS.