M.R.O. 14—13,000—27-9-24.

MADRAS RECORD OFFICE.

Government of Madras.

Revenue DEPARTMENT.

G.O. No. 2253 Press ~~Mis.~~

178-179

Dated 10-12-1863

Not to be folded or roughly handled

Proceedings of the Madras Government, Revenue Department, 10th December 1863.

No. 178. Read the following letter from Captain R. H. BEDDOME, Officiating Conservator of Forests, to J. D. SIM, Esq., Secretary to Government, Revenue Department, Fort Saint George, dated Camp Ootacamund, 5th December 1863, No. 762:—

SIR,

1. I have the honor to forward a copy of a letter from the Collector of Malabar with a Plan and Estimate for a Store-room to be built at Nelambúr.

2. The amount of the Estimate is Rupees 1,840, it can be met out of the Budget Estimate for the current year, and as the building is most necessary, I would recommend that it be immediately sanctioned.

From G. A. BALLARD, Esq., Collector of Malabar, to Captain R. H. BEDDOME, Conservator of Forests, dated Ponani, 20th November 1863, No. 4,006 A.

SIR,

1. Adverting to Government Order 22nd September last, No. 1,737, I have the honor to forward two Plans and Estimates for a Store-room, and Room for the Sub-Assistant Conservator at Nelambúr.

2. Captain Bean first furnished me with the Plan and Estimate* marked 1, I requested him to modify it, and reduce the cost if possible. He has now sent Plan and Estimate† marked 2, which I quite approve, and have counter-signed.

3. If the execution of the work is sanctioned at once, I fancy it may be completed before the monsoon, and it is very desirable indeed that it should be so completed.

* Amounting to Rupees 2,110.

† Amounting to Rupees 1,840.

(True Copy.)

(Signed) R. H. BEDDOME, Captain,
Officiating Conservator of Forests.

No. 179. ORDER THEREON, 10th December 1863, No. 2,253.

Sanctioned.


(True Extract.)

(Signed) J. D. SIM,
Secretary to Government.

To the Board of Revenue.
„ Conservator of Forests.
„ Accountant General.
„ Civil Paymaster.
„ Department Public Works.

Exd. S. T. Augustin.

Plan and Section
of a
Store Room
proposed to be Constructed at Nilambur
with a Room and Cook House attached
for the use of the Assistant Conservator
of Forests

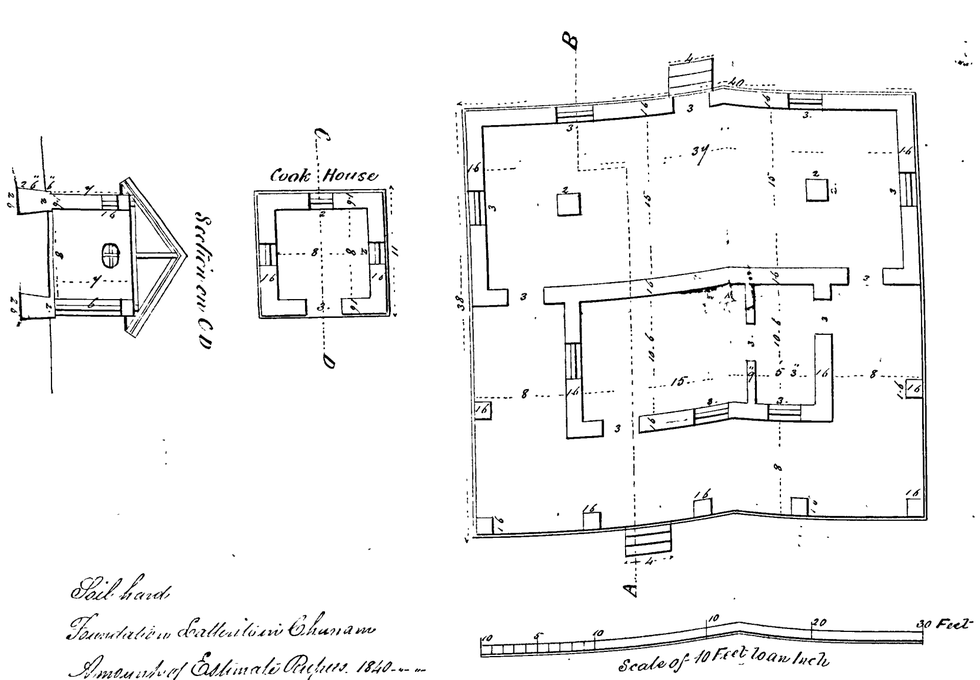

Soil hard
Timber to be Callicut Chunam
Amount by Estimate Rupees 1840 — —

Executive Engineers Office
Malabar
Calicut 14th November 1863

Examined
C.E. 20-11-63

J Bean Captain R.E.
Executive Engineer
Malabar.

Rec'd 29/1/63

Malabar District

Estimate of the probable Expense of Constructing a Stone Shed with a Room and Cook House attached for the use of the Assistant Conservator of Forests at Pallamboor

Totals	Measurements: Number	Length	Breadth	Height	Cubic Contents	Particulars of Works	Rate	Rate	Amount of each Article of Work	Amount of the Estimate	Remarks & Explanations
	156	2.3	3	"	1053	Foundations to Principal and Side walls					
	9	6	2	6	47	6 Ditto to Partition wall					
	6	6	2	9	45	4½ Ditto to 2 Centre Pillars					
	15	9	2	3	129	11½ Ditto to 4 Verandah Pillars					
	69	9	2	1	149	3 Ditto to Intermediate Basements between them					
	165	2	2	"	620	Basement to Principal and Side walls					
	10	1	6	2	30	" to Partition Walls					
	5	2	6	2	25	" to Centre Pillars					
	14	2	2	"	56	" to 4 Verandah Pillars					
	62	1	6	2	186	Ditto to Intermediate Basements between them					
	69	1	6	14	1449	Principal Walls above					
	10	6	9	14	110	3 Partition walls do					
	86	1	6	8	1096	6 Side walls do					
	16	1	6	2	9	66 2 Gable Ends to Side walls					
	4	2	14	"	112	2 Centre Pillars above					
	10	6	1	6	8	6 133 10½ 4 Verandah Pillars above					
					80	2 Steps					
					5419	8½ Totals					
					299	8½ Deduct for Openings					
					5120	Total Cubic feet of Rattens in Chunam	18	"	@1000 c/f	921 9	
Verandah Shed	"	"	"	1164	"	Square feet of Flooring with 6 stone gelly in Clay	1	4	@3 Sqm	14 8	
Stone	"	"	"	3870	"	Ditto of Whitewashing	"	3	@2½	9 4	
	48	51	"	21	93	Ditto of Roofing with Rattens 18 Pers Pan Tiles Chunam Edges and ridges &c	18	"	@2½	394 12	
						1 Hung Bath Thuts of Enool wood	"	"	"	25 "	
	40	6	1	"	9	30 4½ Pillah Plate					
	121	"	6	"	4	20 2 Wall Plate					
	80	"	9	"	6	25 " Verandah Summers					
						76 6½ Total Cubic feet of Enool wood	1	"	@Cuft	95 8	
Construction &	9	3	"			6 Battens Doors Complete	12	"	each	42 "	
	4	"	3	"		9 Ditto Windows &c	8	"	@2½	56 "	
						1 Excavating foundation and filling in	"	"	"	15 "	
						Totals				1581 9	
						For Cook's Room					
	38	2	3	2	6	268 9 Foundations to Walls					
	38	2	"	6	"	38 " Basement to &c					
	38	1	6	7	"	399 " Walls above					
						693 7½ Totals					
						40 2½ Deduct for Openings					
						653 Total Cubic feet of Rattens in Chunam	18	"	@1000 c/f	117 8	
	"	"	"	550	"	Square feet of Whitewashing	"	3	@1 Sqm	1 15	
	"	"	"	64	"	Ditto of Flooring with 6 Stone gelly in Clay	1	4	@2½	12 "	
	11	18	"	198	"	Ditto of Roofing with Rattens 18 Pers Pan Tiles Chunam Edges and ridges &c	18	"	@2½	35 10	
	6	3	"			1 Batten Door Complete	10	"	each	10 "	
	2	1	6	"		3 Wooden Bars for Bulls Eyes	1	"	@2½	3 "	
						Excavating foundations and filling in	"	"	"	5 "	
						Totals				172 13	
						Sundries and Superintendence about	5	"	@Cent	1754 6	
										85 10	
						Total Estimate Rupees				1840 "	

Executive Engineer's Office
Malabar
Calicut 14th November
1863

Rec'd 20-11-63

Captain R.E.
Executive Engineer
Malabar

1867.3 Department.

Encl. to Govt. for December

No. 782

From

The Officiating Conservator of Forests.

To The Secretary to Government
do do

Dated 5th December 1867

Received 8th

No. 762.

Enclosure

No. 3

Subject.

Forwarding an estimate for the Stone Locks built at Pelandhive, and requesting sanction may be obtained for the same.

Rs. 2253

Copies sent

Rs. 1784-14-7

Fort St. George
10th December 1867

8003