M.R.O. 1—32,000—16-10-29.

MADRAS RECORD OFFICE.

Government of Madras.

Revenue DEPARTMENT.

G.O. No. 2323 Press / Mis.

65-66 Dated 4-9- 19 1868

Not to be folded or roughly handled

Proceedings of the Madras Government, Revenue Department,
4th September 1868.

No. 65. Read the following Proceedings of the Madras Government in the Public Works Department:—

Passing orders on letter from the Presidency Executive Engineer, forwarding a set of detailed tracings of the Talook Cutcherry drawings with the quantities. } (Here enter 1st September 1868, No. 2,791.)

No. 66. ORDER THEREON, 4th September 1868, No. 2,323.

Miscellaneous. Ordered to be recorded.

(True Extract.)

(Signed) H. SEWELL,
Acting Under Secretary to Government.

Exd. F. R. Bantleman.

No. 7. Read the following letter from R. F. CHISHOLM, Esq., C. E., Executive Engineer, Presidency, to the Secretary to Government, Public Works Department, dated Madras, 22nd August 1868, No. 203 :—

1. I have the honor to submit, for transmission to Colonel Winscom (*vide* the correspondence noted on the margin), a set of detailed tracings* of the Talook Cutcherry drawings with the quantities. There will be no difficulty in executing the building from these documents.

G. O., No. 50, dated 27th May 1868.
Do. ,, 4, ,, 3rd August ,,

* Drawings Nos. 1, 2, 4, 5, 6, 7, and 8.

2. I would recommend that the iron work be obtained on indent from the Public Works Stores, when the distance is not great, I could then inspect it before it leaves the stores. I mention this as I observe that one or two iron gratings recently fixed in the Lunatic Asylum at Kilpauk are useless as a means of protection.

3. If you will kindly furnish me with a list of the places at which Cutcherries are being constructed after the standard plans, I will have sets of tracings prepared and forwarded with the quantities.

TALOOK CUTCHERRY AND SUBSIDIARY JAIL.

Abstract of quantities and Estimate of cost.

Quantity.		Item.		Rate.	Amount.
152	Cubic yards.	Concrete below foundations. (The rate must cover cost of excavation and filling in)	@		
389	Do. ...	Masonry in foundations and basement ...	@		
551	Do. ...	Masonry in mud in superstructure ...	@		
162	Do. ...	Masonry in chunam superstructure ...	@		
110	Running feet.	Inner cornice to rooms	@		
153	Do. ...	Exterior cornice with dentils.	@		
114	Squares ...	Tiled roofing. (The rate must cover the cost of reepers and chunam borders)...	@		
10	Do. ...	Terrace roofing	@		
85	Do. ...	Flooring ... ... (Stone curbing if procurable)... ...	@		
69	No. ...	Stones below posts and trusses	@		
164	Squares ...	Interior plastering	@		
119	Do. ...	Exterior pointing	@		
1,117	Cubic feet ...	Of Teak wood	@		
2	No. ...	Ornamental trusses in front of Cash-room	@		
1,269	Superficial ft.	Doors, including frames...	@		
273	Do. ...	Batten doors, including frames	@		
20	Do. ...	Venetians, without frames	@		
6	No. ...	Iron gratings, with frames	@		
8	Do. ...	Doors and gratings, without frames measuring 9×4	@		
8	Do. ...	Do. do. 4'-0″×2'-6″ ...	@		

TALOOK CUTCHERRY AND SUBSIDIARY JAIL.
Quantities.

Items.	Length.	Breadth.	Depth.	Contents.	Total.
Concrete below foundations.					
Serishtadar's room	73 0	4 0	0 9	219	
Record-room...	101 0	4 0	0 9	303	
Verandah between Serishtadar's and Record-room	14 6	4 0	0 9	44	
Clerk's room...	81 0	4 0	0 9	243	
Cross walls to do.	15 3	4 0	0 9	46	
Court-house, Tahsildar's room ...	170 6	4 0	0 9	511	
3 Cross walls to do.	47 3	4 0	0 9	142	
Cashier's rooms and open space ...	40 6	4 0	0 9	121	
Cross wall to do.	12 3	4 0	0 9	37	
Male and Female wards	138 6	4 0	0 9	415	
3 Cross walls to do.	36 9	4 0	0 9	110	
Treasury-room	29 6	4 9	0 9	105	
Do. do.	42 6	4 9	0 9	151	
Inspector's rooms and Arms ...	73 6	4 9	0 9	262	
Circular stair-case	13 9	13 9	0 9	142	
Outer verandah round the building.	476 0	3 6	0 9	1,250	
Total cubic feet ...	.....	.....	.....	4,101	
Total cubic yards Concrete ...	.....	.....	.....	.....	152
Foundations including offset.					
	73 0	2 6	1 0	183	
	101 0	2 6	1 0	253	
	17 6	2 6	1 0	44	
	84 0	2 6	1 0	210	
	16 9	2 6	1 0	42	
	170 6	2 6	1 0	426	
	50 3	2 6	1 0	125	
Foundation	43 6	2 6	1 0	109	
	13 9	2 6	1 0	34	
	138 6	2 6	1 0	347	
	41 3	2 6	1 0	103	
	32 6	2 6	1 0	82	
	41 0	3 3	1 0	133	
	74 9	3 3	1 0	243	
	12 3	12 3	1 0	150	
	476 0	1 6	1 0	714	
	73 0	1 9	3 0	383	
	101 0	1 9	3 0	530	
	19 0	1 9	3 0	100	
	85 6	1 9	3 0	449	
	17 6	1 9	3 0	91	
	170 6	1 9	4 6	1,343	
	52 6	1 9	4 6	413	
	45 0	1 9	3 0	236	
Basement	14 6	1 9	3 0	76	
	138 6	1 9	3 0	727	
	43 6	1 9	3 0	228	
	34 0	1 9	3 0	179	
	39 6	2 6	3 0	296	
	74 3	2 6	3 0	556	
	11 6	11 6	3 0	397	
	476 0	0 9	3 0	1,071	
Steps	.....	.....	.....	230	
				10,503	
Total cubic yards ...	.....	.....	.....	.....	389

Proceedings of the Madras Government, Public Works Department,
1st September 1868.

Items.	Length.	Breadth.	Depth.	Contents	Total.
Superstructure, brick-in-mud.					
	73 0	1 3	12 6	1,140	
	101 0	1 3	12 6	1,578	
	20 0	1 3	12 6	313	
	87 6	1 3	12 3	1,340	
	18 0	1 3	12 6	281	
	170 6	1 3	11 0	2,344	
	54 0	1 3	11 0	743	
	26 0	1 3	12 6	407	
	15 0	1 3	12 6	234	
	138 6	1 3	12 6	2,164	
	45 0	1 3	12 6	703	
	35 0	1 3	20 0	875	
	39 0	2 0	20 0	1,590	
	75 3	2 0	20 0	3,010	
	11 0	11 0	26 0	3,146	
5 Gables	19 3	1 3	3 0	360	
	16 3	1 3	3 0	427	
				20,655	
Deduct arch-work ...	.....	.....	627		
Do. brick-in-chunam ..	.....	.....	3,742		
Do. openings ...	.....	.....	1,396	5,765	
Total cubic feet ...	.....	.....	.....	14,890	
Total cubic yards ...	.....	.....	.....	.....	551
Deductions to springing of arches only.					
14 Doors, each	2 0	1 3	0 0	315	
27 Do. ,, ...	4 0	1 3	8 0	1,0 0	
7 Do. ,, ...	4 0	2 0	6 0	336	
Window	4 0	1 3	5 0	25	
6 Openings, square heads, two-thirds of height	4 0	1 3	6 0	180	
NOTE.—No deductions made for clearstorey lights.					
Total openings ...	.....	.....	.....	1,936	
Brick-in-chunam work round all openings, at the corners, and along the tops of walls.					
22 Sides of doors, each	16 0	1 3	1 0	440	
13 Do. ,, ...	13 0	1 3	1 0	211	
5 Do. ,, ...	16 0	2 0	1 0	160	
12 Windows ,, ...	20 0	1 3	1 0	300	
10 Gratings ,, ...	15 6	1 3	1 0	194	
1 Do. ,, ...	15 6	2 0	1 0	31	
Corners, each	11 0	1 3	2 6	138	
8 Do. ,, ...	12 6	1 3	2 6	312	
6 Do. ,, ...	20 0	2 0	3 0	720	
Top of walls and gables	805 0	1 3	1 0	1,006	
Do. do.	115 0	2 0	1 0	230	
Total brick-in-chunam ...	.....	.....	.....	3,712	3,742
21 Flat arches over gratings ...	6 0	1 3	1 6	177	
5 Do. do. ...	6 0	2 0	1 6	68	
25 Arches over doors	8 0	1 3	1 6	281	
12 Do. windows	6 0	1 3	1 6	101	
Total cubic feet ...	.....	.....	.....	627	627
Cubic feet ...	.....	.....	.....	.....	4,369
Total cubic yards brick-in-chunam in superstructure	.....	.....	.....	.....	162

Items.	Length.	Breadth.	Depth.	Contents.	Total.
153 Running feet of Dental Cornice work in front of Serishtadar's room, Arms, and round the circular staircase. Parapet over circular staircase and Arms, &c.					
Roof.					
Serishtadar's and Record-room ...	70 0	25 0	.....	1,750	
Court-house and Tahsildar's room ...	70 3	24 6	.....	1,721	
Clerk's room...	43 3	24 6	.....	1,060	
Cashier's open space, and Police guards	43 3	22 0	.....	951	
Male and Female wards	54 3	22 0	.....	1,194	
Verandah to the Jail	128 0	9 0	.....	1,152	
Do. to Police and Cash-room...	77 0	15 0	.....	1,155	
Do. to Clerk's Office	86 6	9 0	.....	779	
Do. to Court-house	180 0	9 0	.....	1,620	
				11,382	
Total Squares tiled Roofing ...	.....	.....	.....	.....	114
Terrace Roofing.					
Treasury-room	22 0	19 3	.....	424	
Inspector's rooms and Arms ...	54 0	10 0	.....	540	
				964	
Total Squares terrace Roofing ...	.....	.....	.....	.....	10
Flooring.					
Serishtadar's and Record-room ...	62 0	15 0	.....	930	
Clerk's room...	42 0	18 0	.....	756	
Court-house and Tahsildar's room ...	64 0	18 0	.....	1,152	
Cashier's open space and Police ...	42 0	15 0	.....	630	
Between verandah and main room to do.	52 0	1 3	.....	65	
Treasury-room	20 0	18 0	.....	360	
Inspector's rooms and Arms ...	41 0	8 0	.....	328	
Male and Female wards	48 0	15 0	.....	720	
Verandah to the Jail	125 0	6 0	.....	750	
Do. Police and Cash-room ...	77 0	11 6	.....	885	
Do. Clerk's room	86 6	6 0	.....	519	
Court-house and Tahsildar's room ...	176 0	6 0	.....	1,056	
Door-ways	161 0	0 9	.....	121	
Steps	.....	.....	.....	270	
				8,542	
Total Squares Flooring ...	.....	.....	.....	.....	85
Interior Plastering.					
Serishtadar's room	68 0	13 0	.....	884	
Verandah	50 0	13 0	.....	650	
Record-room...	96 0	13 0	.....	1,248	
Clerk's room...	156 0	13 0	.....	2,028	
Court-house and Tahsildar's room ...	272 0	11 6	.....	3,128	
Cashier's room	54 0	13 0	.....	702	
Treasury-room	76 0	19 6	.....	1,482	
Inspector's room	64 0	19 6	.....	1,248	
Arms...	50 0	19 6	.....	975	
Jail	216 0	13 0	.....	2,808	
11 Gables, ... each	19 3	3 0	.....	635	
13 Do. ... ... ,,	16 3	3 0	.....	634	
				16,422	
Total Squares interior Plastering...	.....	.....	.....	.....	164

Proceedings of the Madras Government, Public Works Department,
1st September 1868.

Items.	Length.	Breadth.	Depth.	Contents.	Total.
Exterior Pointing.					
Outer wall of Serishtadar's room ...	31 0	13 0	.....	403	
Do. of Clerk's room	74 6	13 0	.....	968	
Do. of Court-house	173 0	11 6	.....	1,990	
Do. of Record-room	102 0	13 0	.....	1,326	
Do. Cash-room	26 6	13 0	.....	344	
Do. in the openings	35 0	13 0	.....	455	
Gables in do.	35 0	3 0	.....	105	
Outer wall of Treasury	127 0	18 0	.....	2,286	
Do. of Jail	143 6	13 0	.....	1,866	
Basement all round	437 0	3 0	.....	1,311	
Do. Court-house	197 0	4 6	.....	886	
				11,940	
Total Squares exterior Pointing...	.....	.....	.....	.....	119
Wood-work.					
4 Tie beams	20 3	0 8	0 4	18	
5 Do.	18 0	0 6	0 4	15	
8 Struts	5 6	0 3	0 4	4	
10 Do.	4 9	0 3	0 3	3	
8 Principal rafters	11 6	0 5	0 4	13	
10 Do. do.	9 8	0 4	0 4	11	
2 }	19 0	0 6	0 4	6	
8 } Hip rafters	16 0	0 6	0 4	21	
12 }	13 0	0 5	0 4	22	
Ridge Pole. } Court-house...	59 0	0 9	0 3	11	
2 Purlins. }	64 0	0 9	0 7	56	
2 Do.	68 0	0 6	0 5	28	
Ridge Pole	39 0	0 9	0 3	7	
2 Purlins	45 0	0 9	0 7	37	
2 Do.	38 0	0 6	0 5	16	
Ridge	56 0	0 7	0 3	8	
2 Purlins	61 0	0 7	0 5	30	
2 Do.	67 0	0 5	0 4	19	
Ridge	27 0	0 7	0 3	4	
2 Purlins	27 0	0 7	0 5	13	
2 Do.	27 0	0 5	0 4	8	
Ridge beam	20 0	0 9	0 3	4	
7 Purlins, each	20 0	0 7	0 5	34	
Ridge beam	36 0	0 7	0 5	9	
2 Purlins, each	46 0	0 7	0 5	22	
2 Do.	68 0	0 5	0 4	19	
2 Beams, for Treasury	20 0	1 3	0 10	42	
15 Joists, each	22 0	0 4½	0 2½	26	
38 Do. for Inspector's room and Arms	10 0	0 5	0 2½	33	
74 Rafters, 1 foot 6 inches apart ...	42 0	0 4	0 3	223	
21 Do. do. ...	50 0	0 4	0 3	88	
4 Do. do. ...	10 0	0 4	0 3	3	
44 Do. do. ...	38 0	0 3½	0 2½	10	
46 Do. do. ...	24 0	0 3½	0 2½	67	
Brestsummers	488 0	0 5	0 5	85	
52 Struts	4 6	0 2½	0 2½	9	
8 Posts	6 6	0 5	0 5	9	
2 Do.	12 0	0 7	0 7	8	
44 Do.	10 0	0 5	0 5	76	
				1,117	
Total cubic feet wrought Teak...	.....	.....	.....	.....	1,117
Wooden ornamental frame in front of Cash-room	No. 2.				

Items.	Length.	Breadth.	Depth.	Contents.	Total.
Doors and Windows including frames and painting.					
1 Window head taken square, Serishtadar's room	7 6	.....	4 0	30	
26 Venetian doors	8 3	.....	4 4	929	
14 Do.	9 0	.....	2 4	294	
2 Window heads	4 0	.....	2 0	16	
Total doors with frames...	.....	.....	.....	1,269	
Batten doors with frames, No. 7 ...	9 0	.....	4 4	273	
Total batten doors with frames...	.....	.....	.....	.....	273
Venetians without frames	5 0	.....	4 0	20	
Total Venetians without frames...	.....	.....	.....	.....	20
Iron doors or gratings with frames, No. 6	9 0	.....	4 4	234	
Iron doors or gratings without frames—					
No. 8	9 0	.....	4 0	288	
No. 8	4 0	.....	2 6	80	

(Signed) R. F. CHISHOLM, C. E.,
Executive Engineer, Presidency.

No. 8. ORDER THEREON, 1st September 1868, No. 2,791.

CIVIL WORKS, No. 2.

1. Resolved that the plans received with this letter together with the Statement of quantities and Abstract Estimate referred to in paragraph 1 be circulated to the Superintending Engineers in continuation of G. O. No. 3,552 of the 18th November 1867.

2. Attention is drawn to the suggestion in paragraph 2.

(True Extract.)

Colonel, R. E.,
Secretary to Government.


To the Superintending Engineers,
,, Revenue Department,
,, Judicial do.
,, Board of Revenue,
To Captain R. B. Kennedy,
With Plans, ~~Statement &c.~~

Exd. T. O'Connor.

Pe-2323.


DRAWING Nº 1.


TALOOK CUTCHERRY AND SUBSIDIARY JAIL.

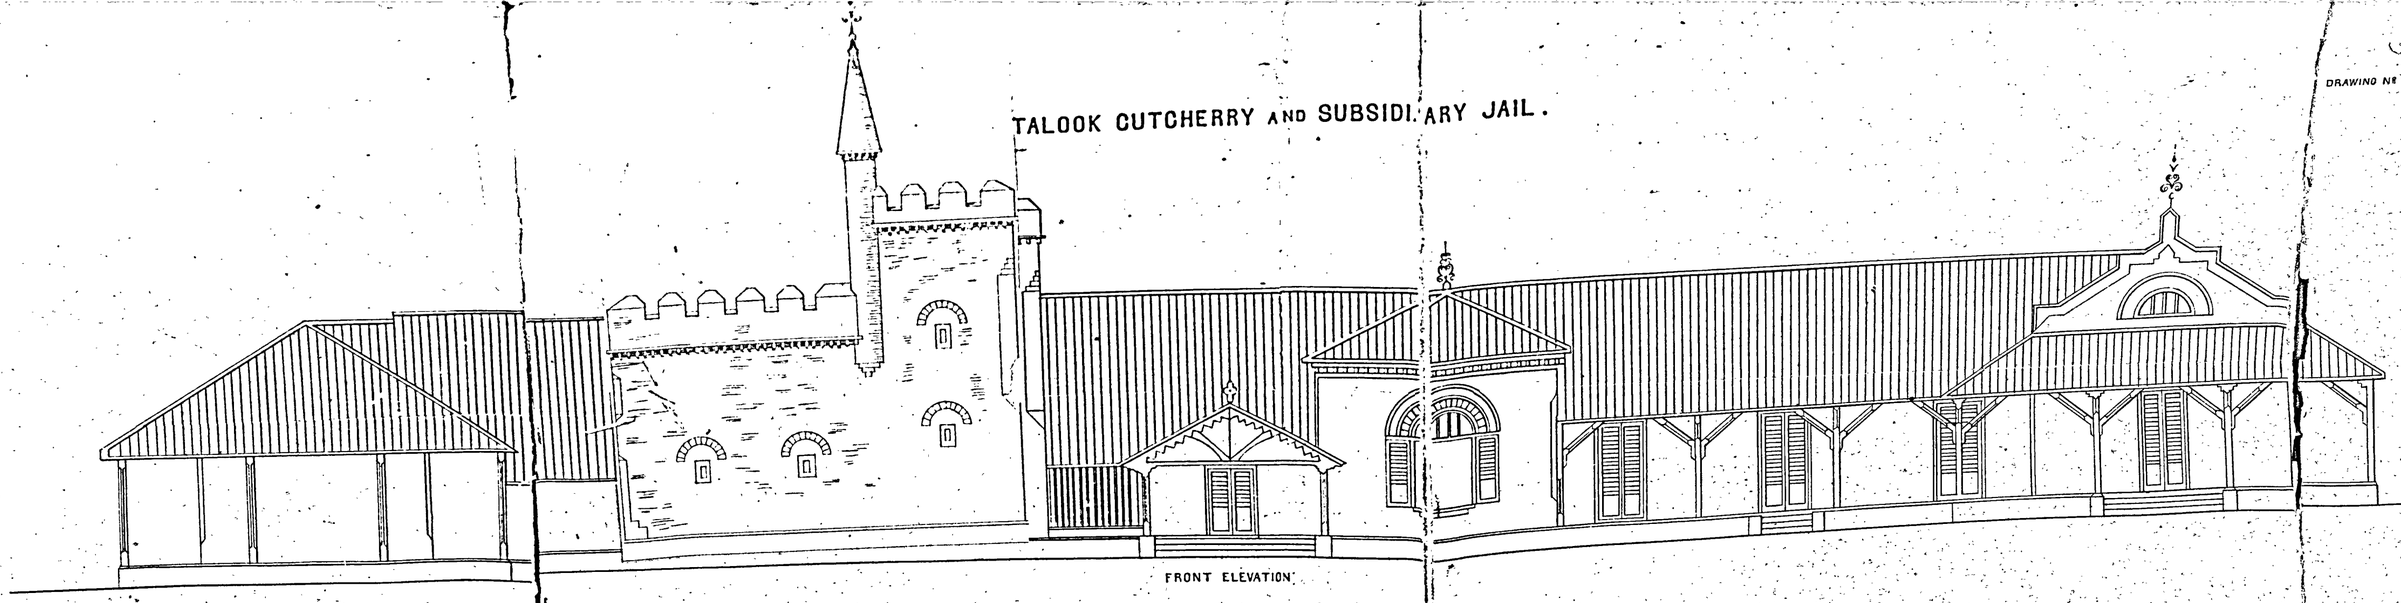

FRONT ELEVATION.

NOTE. THE THICK DOTTED LINES SHOW THE CONSTRUCTION OF THE ROOF.

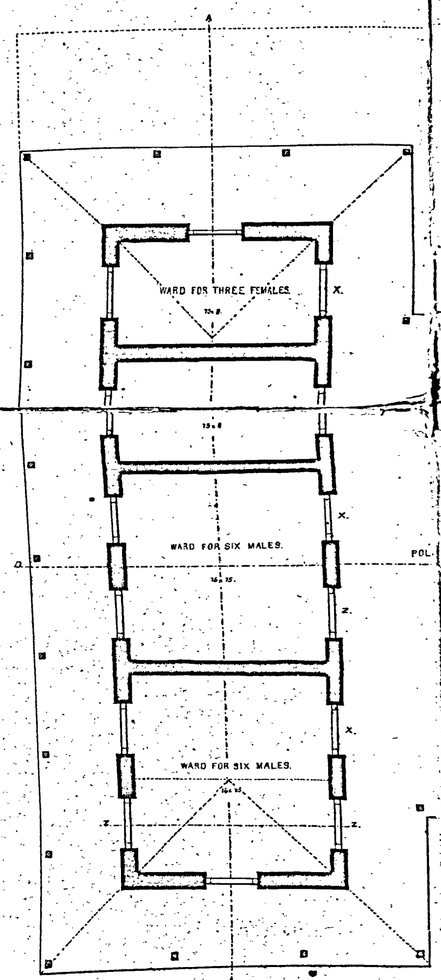

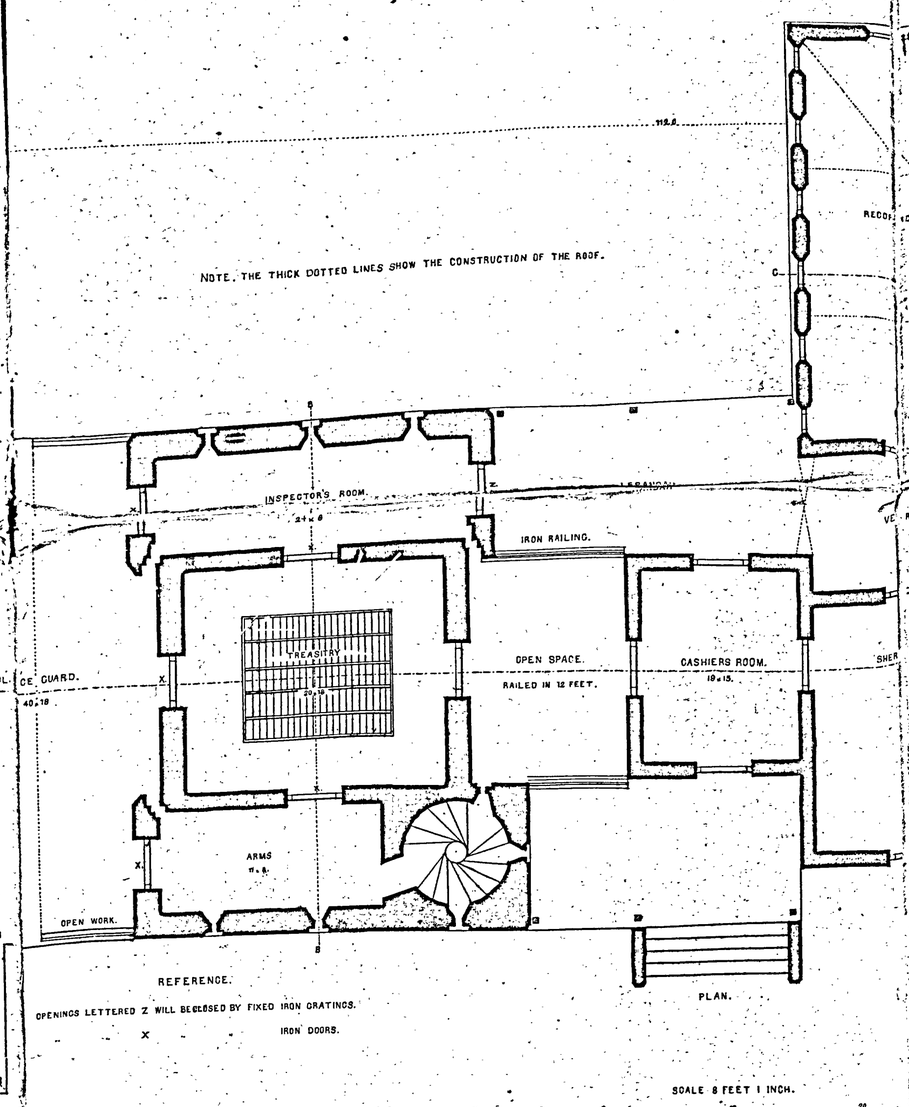

REFERENCE.

OPENINGS LETTERED Z WILL BE CLOSED BY FIXED IRON GRATINGS.


X IRON DOORS.

PLAN.

SCALE 8 FEET 1 INCH.

DRAWN BY T GANAPATHY LITHO BY R.J.BALDREY COVE LITHO PRESS FORT ST GEORGE.

ALL WALLS EXCEPT THE TREASURY WALLS WILL BE A BRICK AND A HALF THICK ABOUT 13

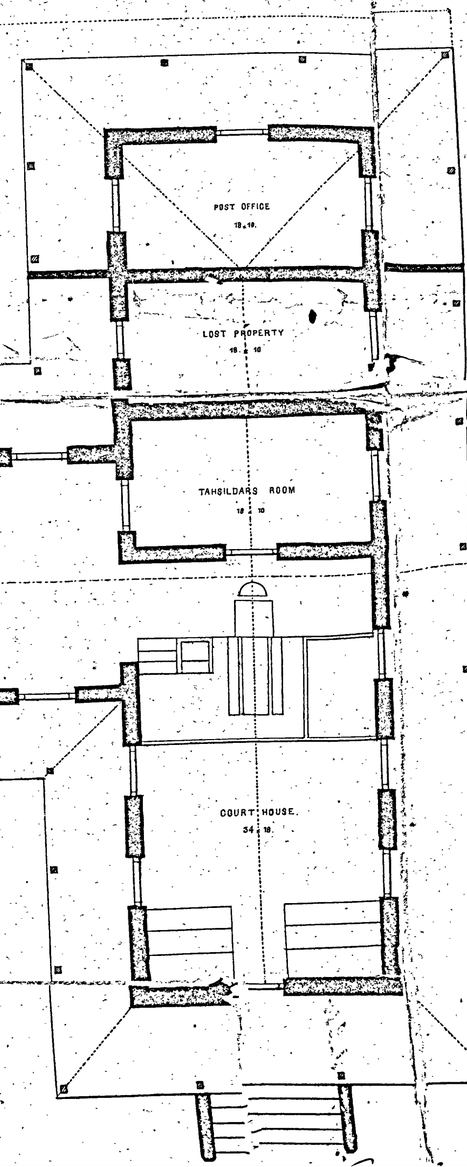


Rob^t Baldrey
Superintendent and Manager.

(Signed) R. Chisholm Arct


TALUQ CUTCHERRY AND SUBSIDIARY JAIL.

DRAWING No 2.


END ELEVATION OF TALOOK CUTCHERRY

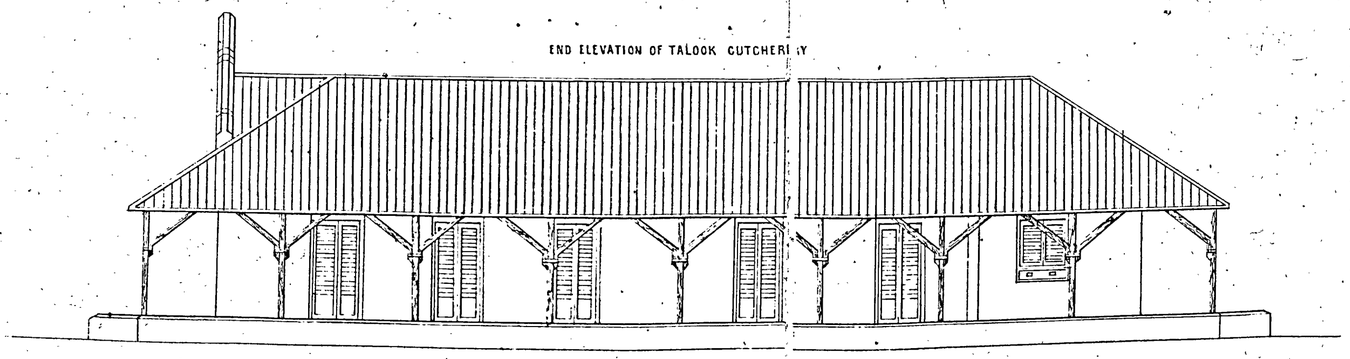


END ELEVATION OF JAIL

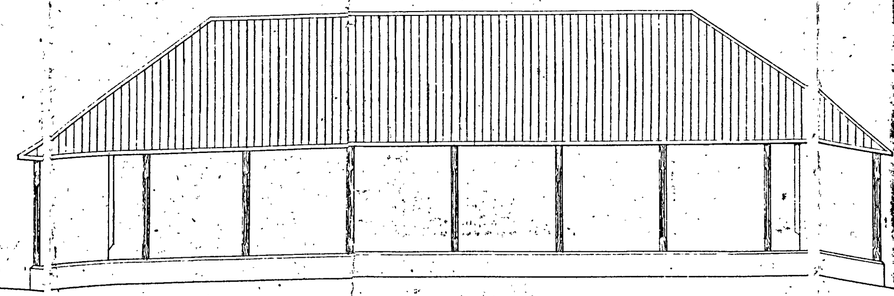


LONGITUDINAL SECTION OF JAIL LINE A.A.

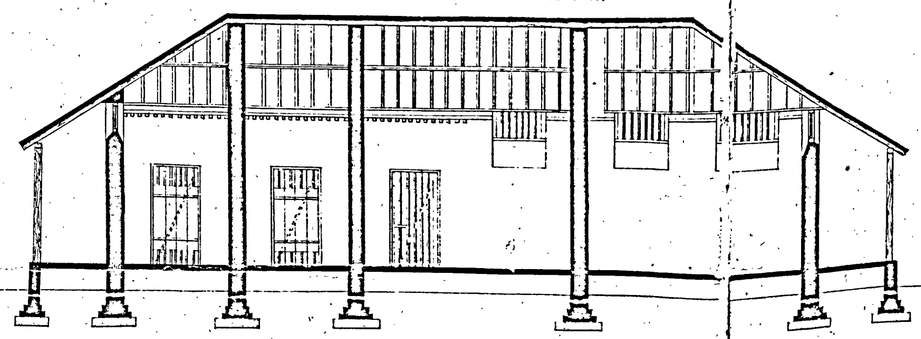


CROSS SECTION OF TREASURY LINE B.B.

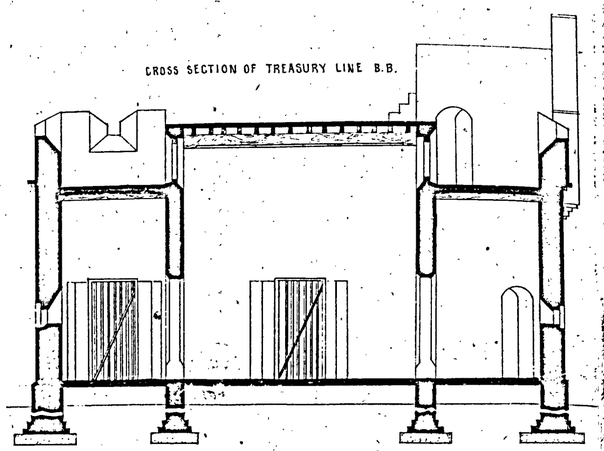


CROSS SECTION OF RECORD ROOM LINE C.C.



PART ELEVATION OF RECORD ROOM.




LONGITUDINAL SECTION OF BUILDING LINE D.D.

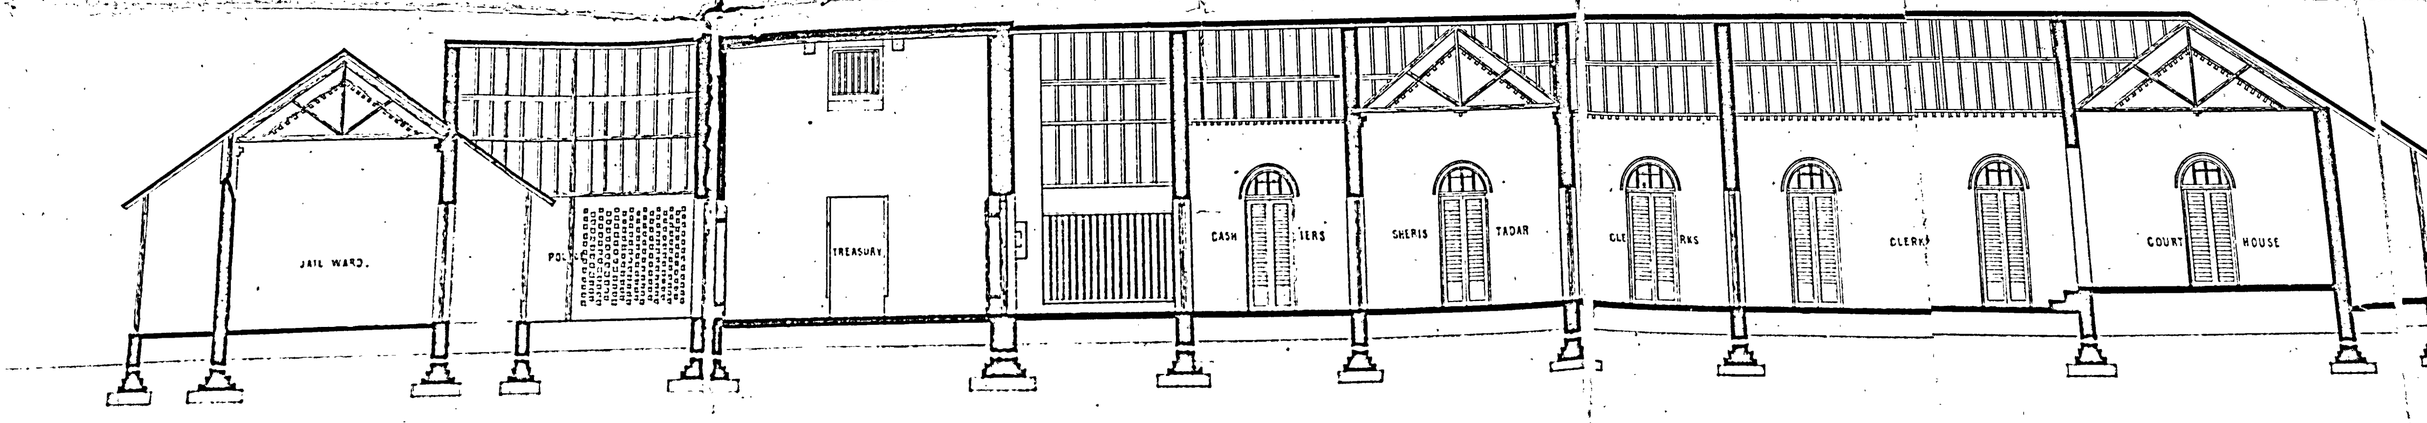


DESIGN FOR A TALOOK CUTCHERRY AND SUBSIDIARY JAIL

PLAN №1 DRAWING №3


SIDE ELEVATION OF RYOTS SHED

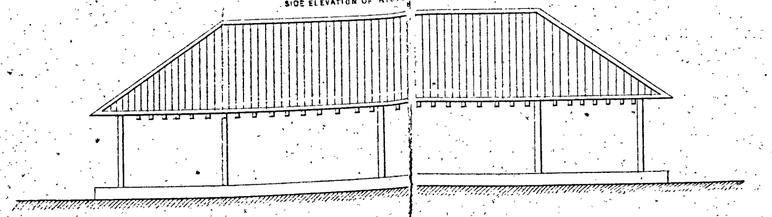


END ELEVATION OF JAIL LATRINE.

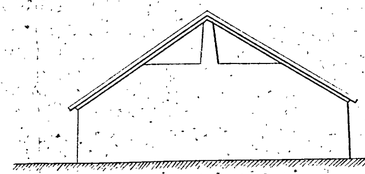


SIDE ELEVATION OF JAIL LATRINE.

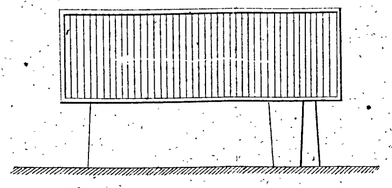


ELEVATION OF COOK ROOM




CROSS SECTION OF RYOTS SHED

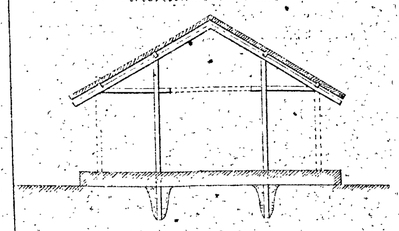


PLAN OF RYOTS SHED

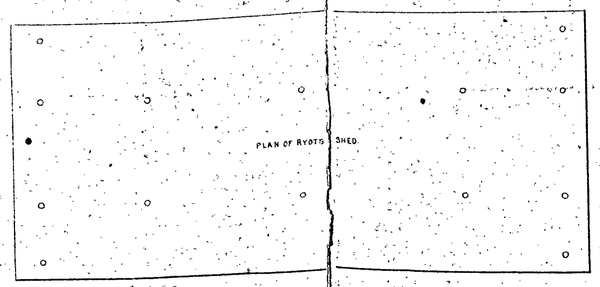


CROSS SECTION OF JAIL LATRINE

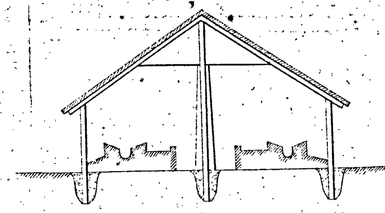


PLAN OF JAIL LATRINE




PLAN OF COOK ROOM.




CROSS SECTION OF HOSPITAL SHED.




BACK ELEVATION OF HOSPITAL SHED

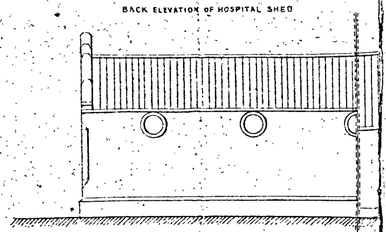


FRONT ELEVATION OF HOSPITAL SHED.



END ELEVATION OF PUBLIC LATRINE.

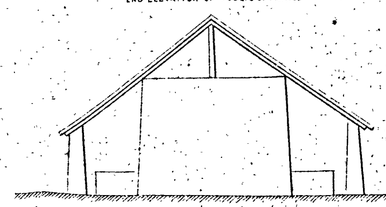


SIDE ELEVATION OF PUBLIC LATRINE

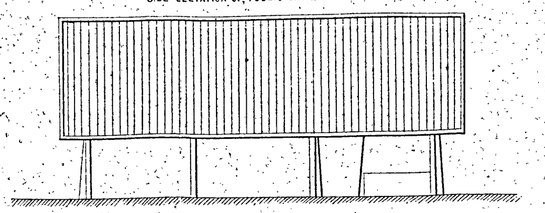


NOTE The latrines and Cook shed will be built with mud walling

END ELEVATION OF HOSPITAL SHED




PLAN OF HOSPITAL SHED

Burnt brick mud cement.

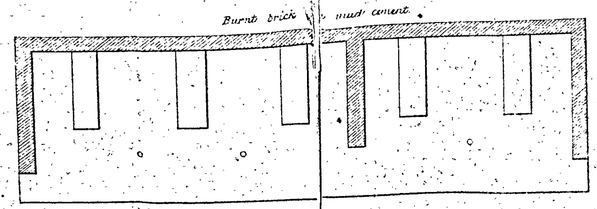


CROSS SECTION OF PUBLIC LATRINE

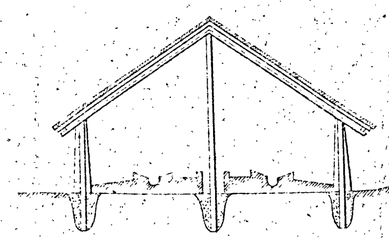

PLAN OF PUBLIC LATRINE

Mud Wall

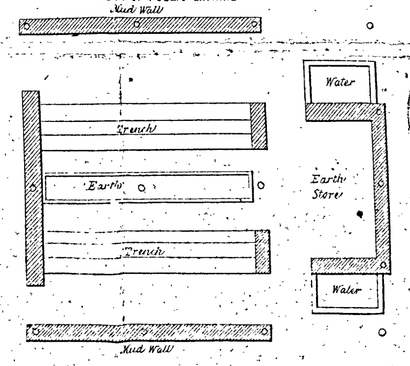

Approximate Estimates.

Ryots Shed	Rupees	825.
Hospital Shed	"	100
Jail Latrine	"	350
Public ditto	"	650
Cook Shed	"	250

/True Copy/

Colonel R. E.

TALUQ CUTCHERY AND SUBSIDIARY JAIL.

DETAILS OF TRUSSES.

DRAWIN

SECTION THROUGH A.A.




SECTION THROUGH B.B.



SECTION OF HEAD OF TRUSS.

TRUSS 18 FEET SPAN: FRAMED WITH A CAMBER OF 4 INCHES.

NR 4 REQUIRED.

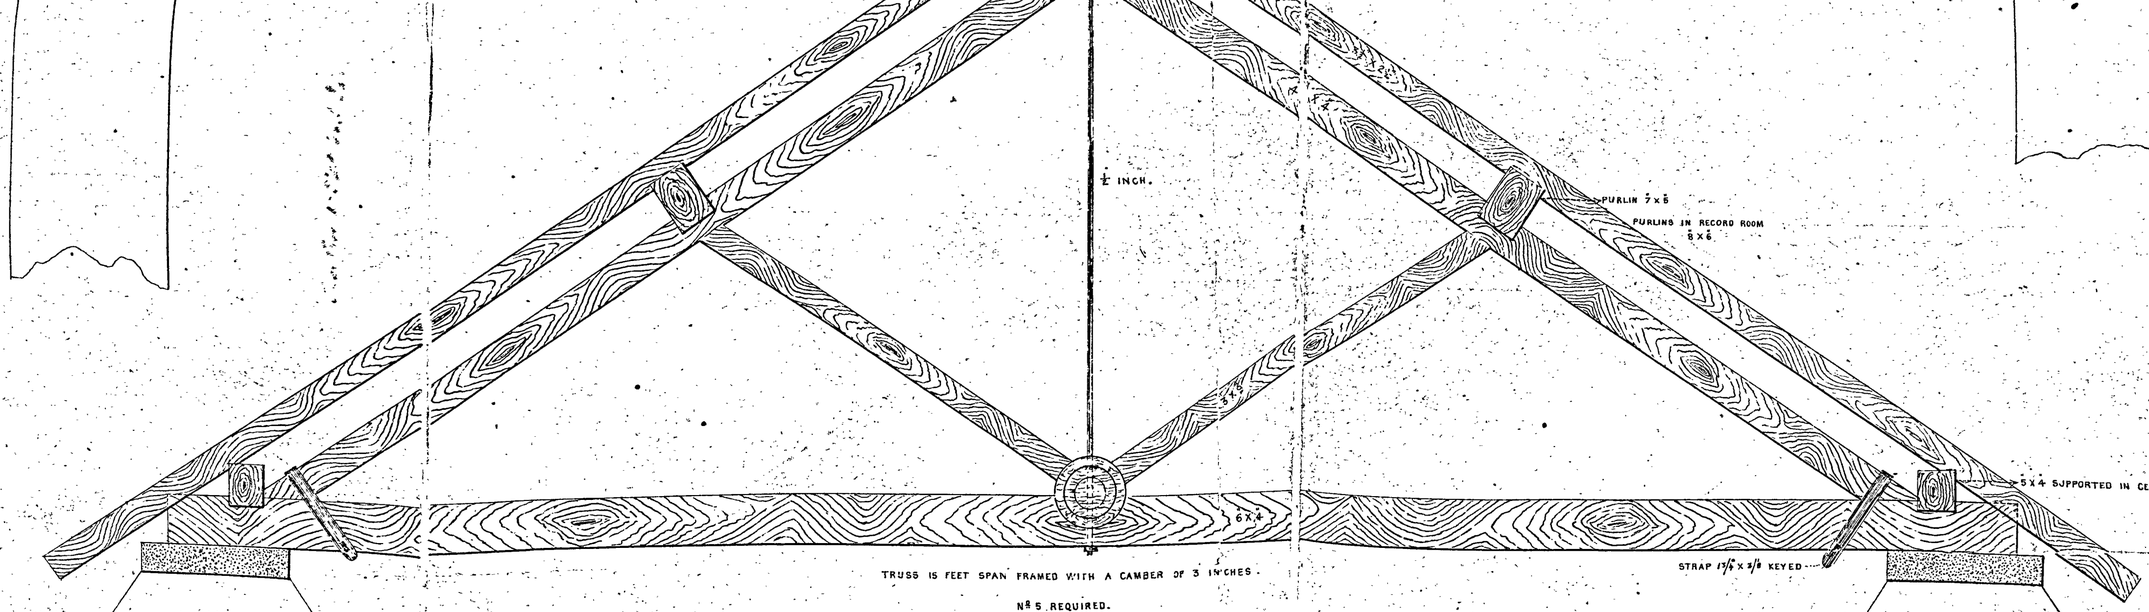

TRUSS IS FEET SPAN FRAMED WITH A CAMBER OF 3 INCHES.

Nos 5 REQUIRED.

Wm. Baldrey

Superintendent and Manager.

Govt Lith. Press, Fort St. George
Madras September 1868

DRAWN BY C.T. A. BALDREY AND T. THAGARAYA RAJOO LITHR BY R. J. BALDREY GOVERNMENT LITHG PRESS FORT ST GEORGE.

(Signed) R. Chisholm. Arct.


(True Copy)

Secretary to Govern


DESIGN FOR A TALOOK CUTCHERRY AND SUBSIDIARY JAIL

PLAN Nº1 DRAWI


SIDE ELEVATION OF RYOTS SHED

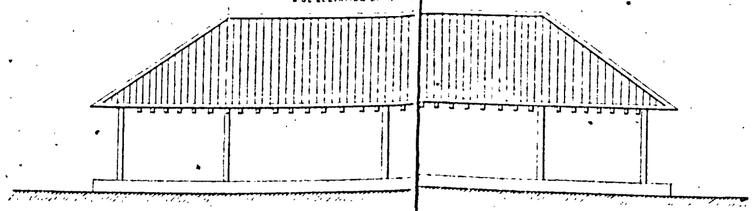


END ELEVATION OF JAIL LATRINE

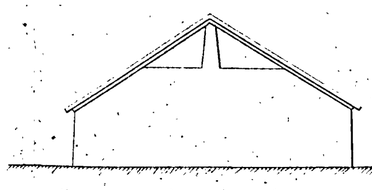


SIDE ELEVATION OF JAIL LATRINE.

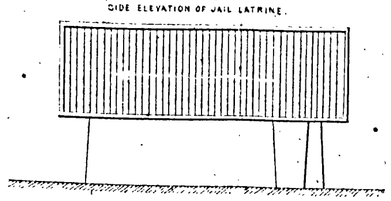


ELEVATION OF COOK ROOM




CROSS SECTION OF RYOTS SHED

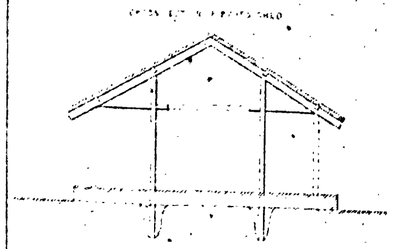


PLAN OF RYOTS SHED

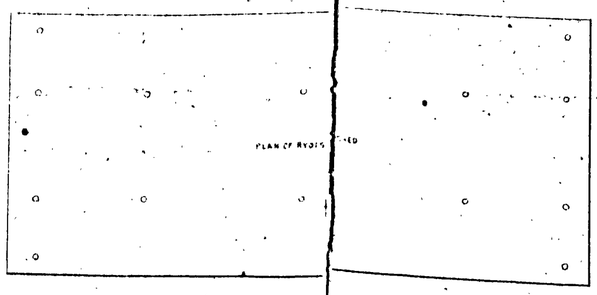


GROSS SECTION OF JAIL LATRINE

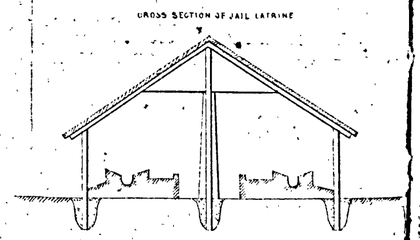


PLAN OF JAIL LATRINE




PLAN OF COOK ROOM




CROSS SECTION OF HOSPITAL SHED




BACK ELEVATION OF HOSPITAL SHED

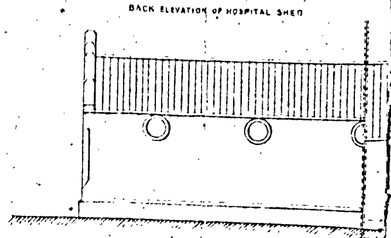


FRONT ELEVATION OF HOSPITAL SHED

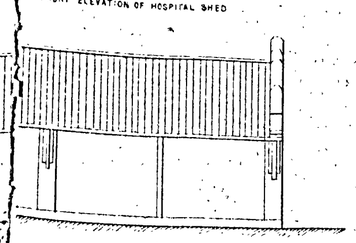

END ELEVATION OF PUBLIC LATRINE.

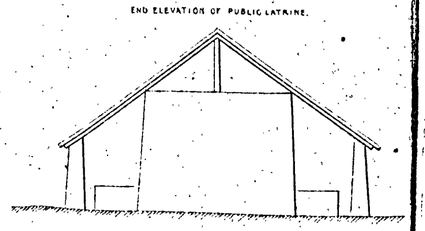


SIDE ELEVATION OF PUBLIC LATRINE

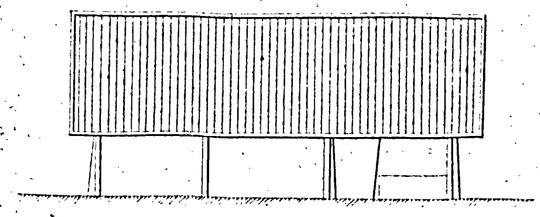


NOTE The latrines and Cook Shed will be built with mud walling

END ELEVATION OF HOSPITAL SHED




PLAN OF HOSPITAL SHED

Burnt brick in mud cement

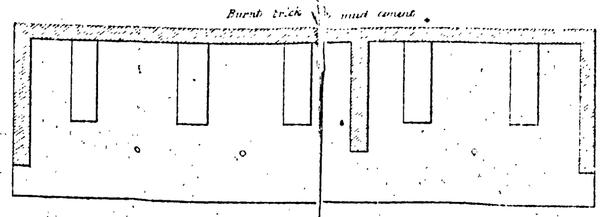


CROSS SECTION OF PUBLIC LATRINE

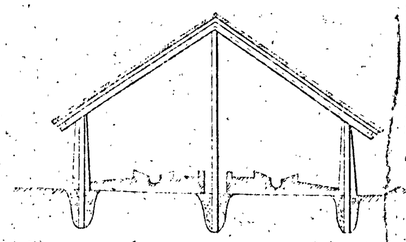

PLAN OF PUBLIC LATRINE

Mud Wall

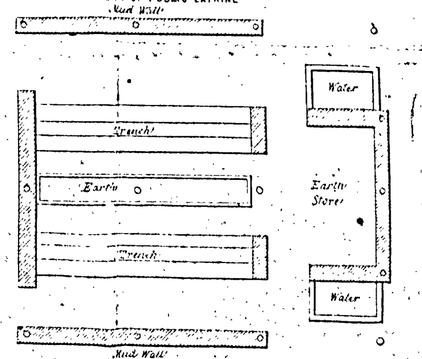


Approximate Estimates

Light Brick Cutcherry	825
Hospital Shed	130
Brick Latrine	350
Public ditto	850
Cook Shed	280

Approved Lieut Col Commg Madras November 1867

SCALE 8 FEET = 1 INCH



DRAWN BY H.H. TAYLOR AND T. THACKARAYAMOO. LITHO BY R.J. BALDREY.


/True Copy/

Secretary to Government

TALUQ CUTCHERRY AND SUBSIDIARY JAIL.


DETAILS OF ROOFING & VERANDAHS.

DRAWING Nº 5

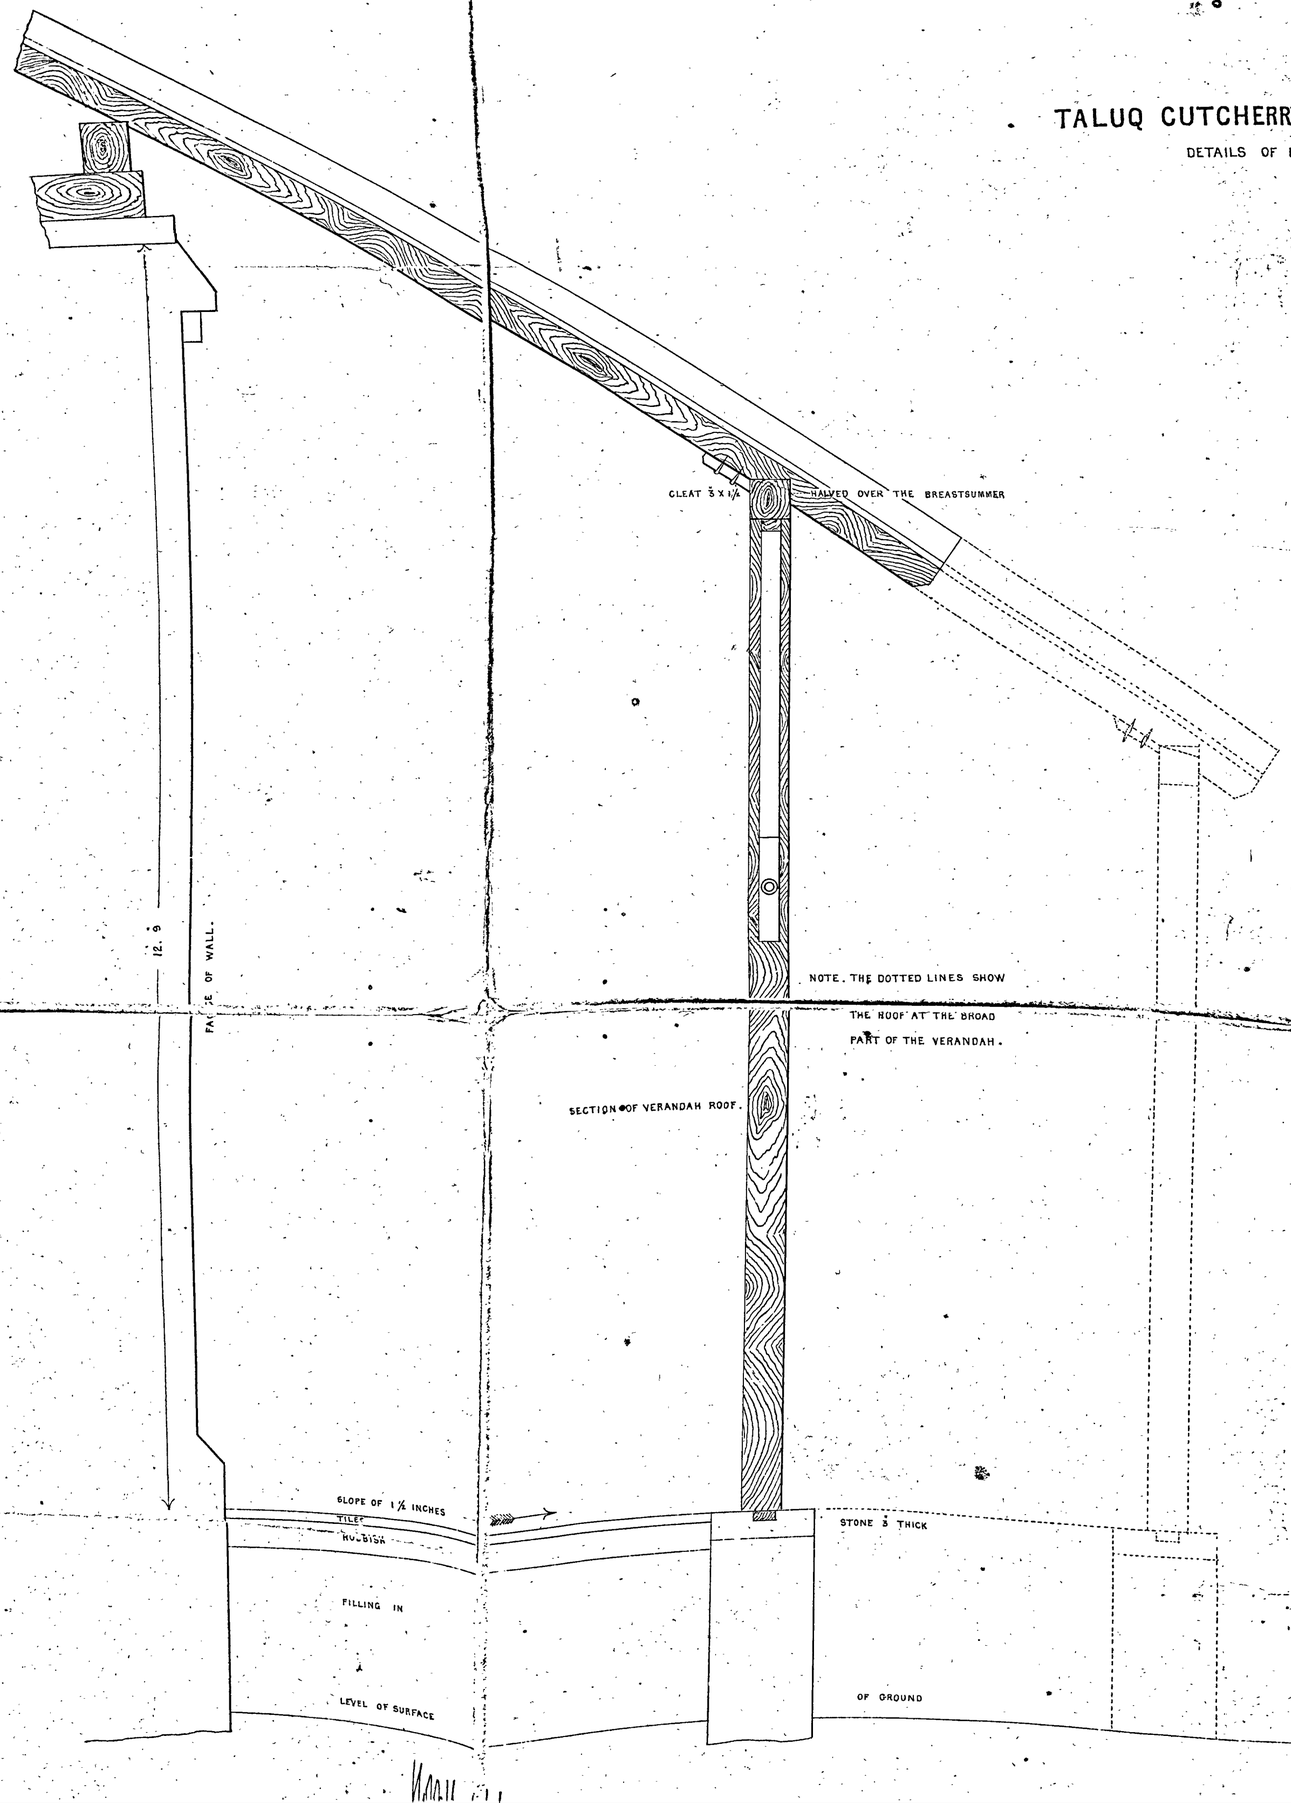

SECTION OF VERANDAH ROOF.

NOTE. THE DOTTED LINES SHOW THE ROOF AT THE BROAD PART OF THE VERANDAH.

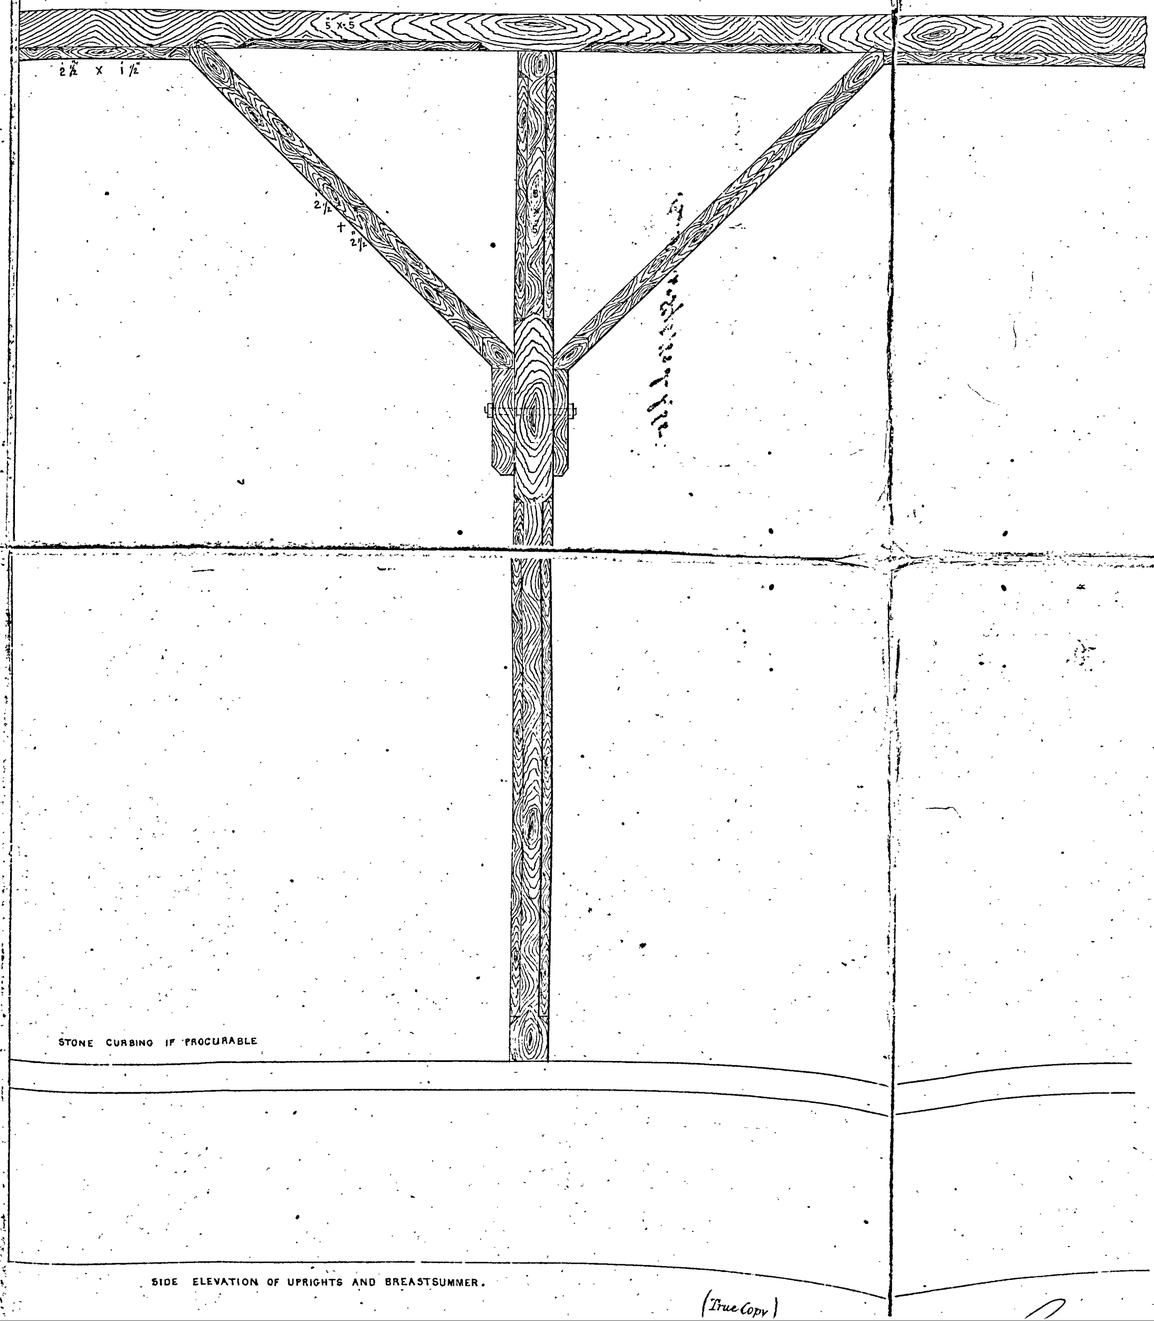


SIDE ELEVATION OF UPRIGHTS AND BREASTSUMMER.


(True Copy)

TALUQ CUTCHERY AND SUBSIDIARY JAIL.


DRAWING. Nº 6.

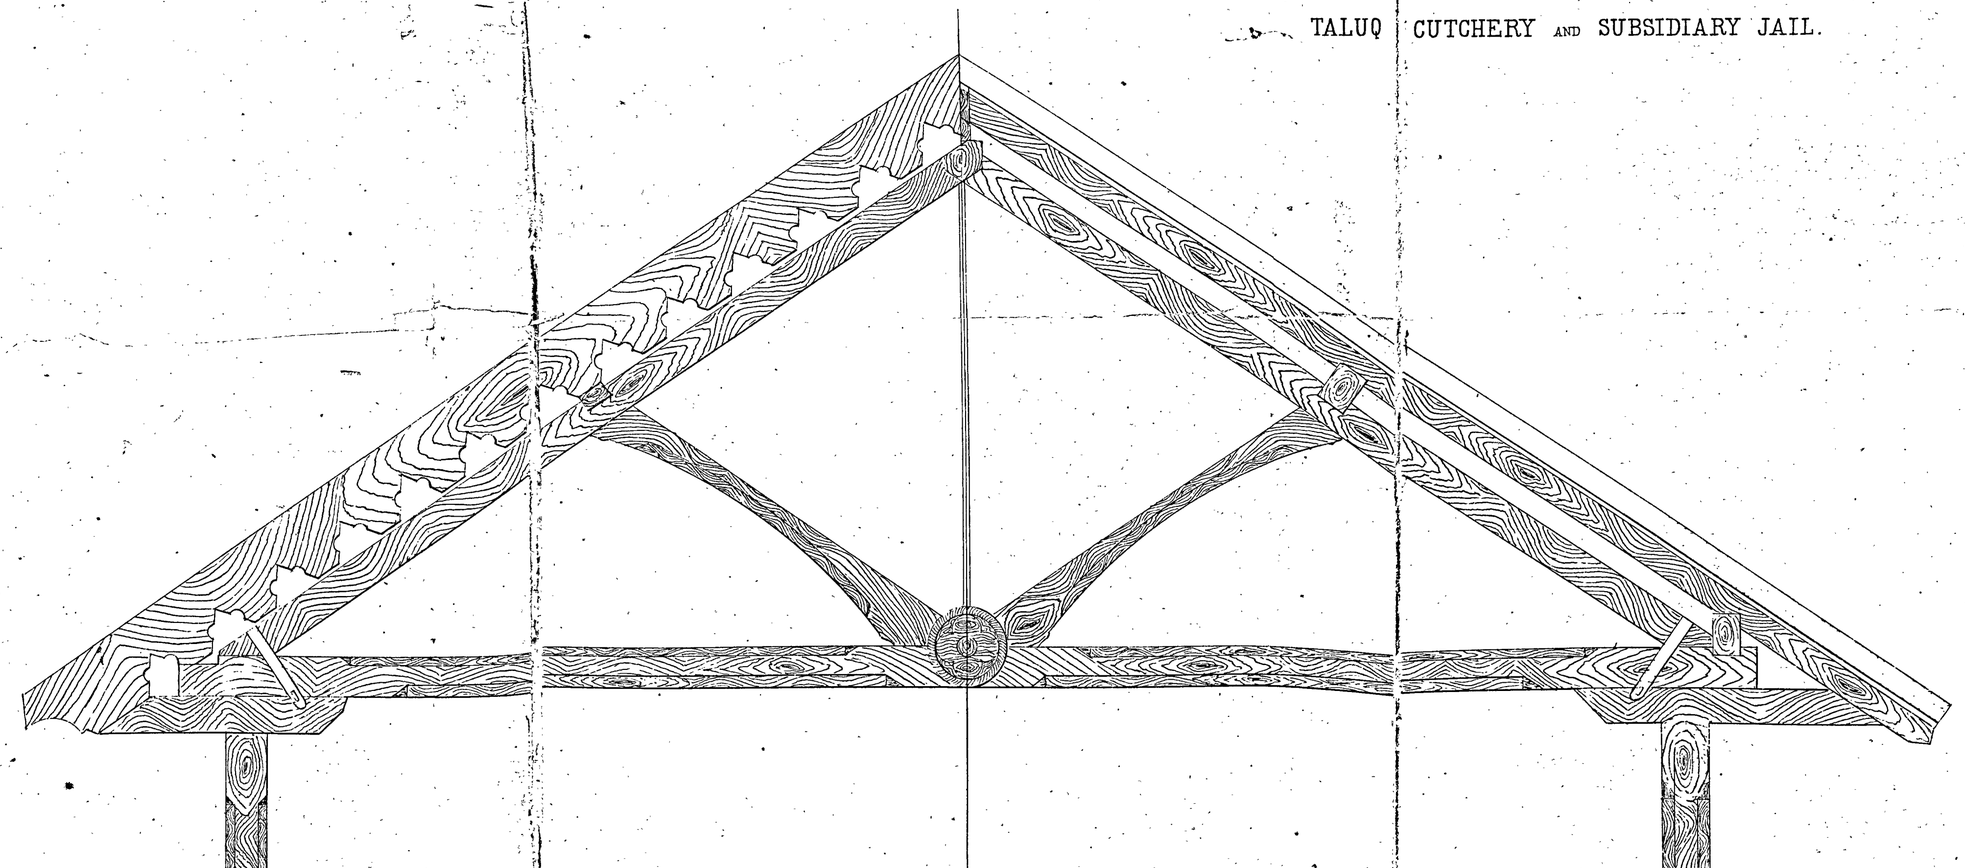


ELEVATION OF TRUSS NEAR TREASURY.

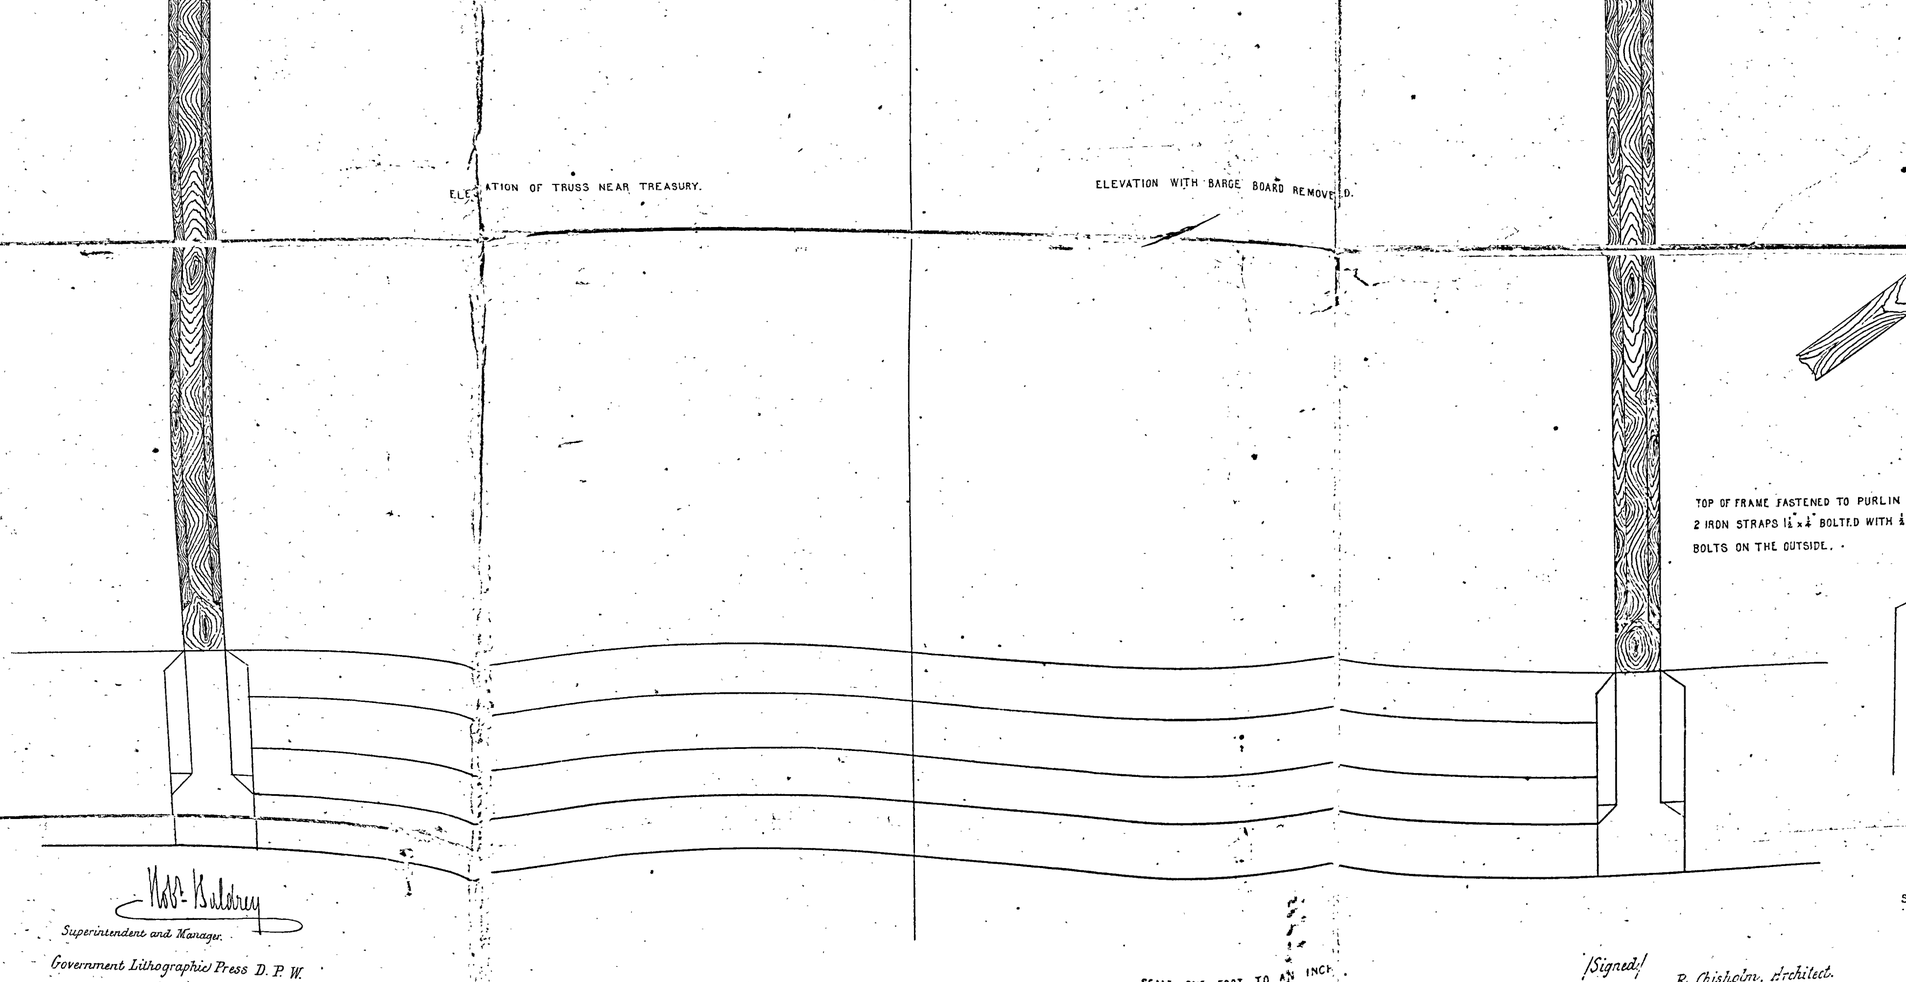

ELEVATION WITH BARGE BOARD REMOVED.

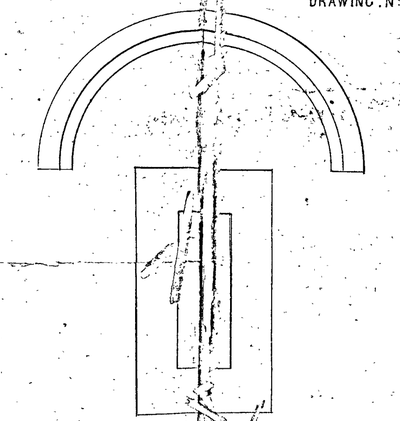

PLAN AND ELEVATION OF EMBRASURE.

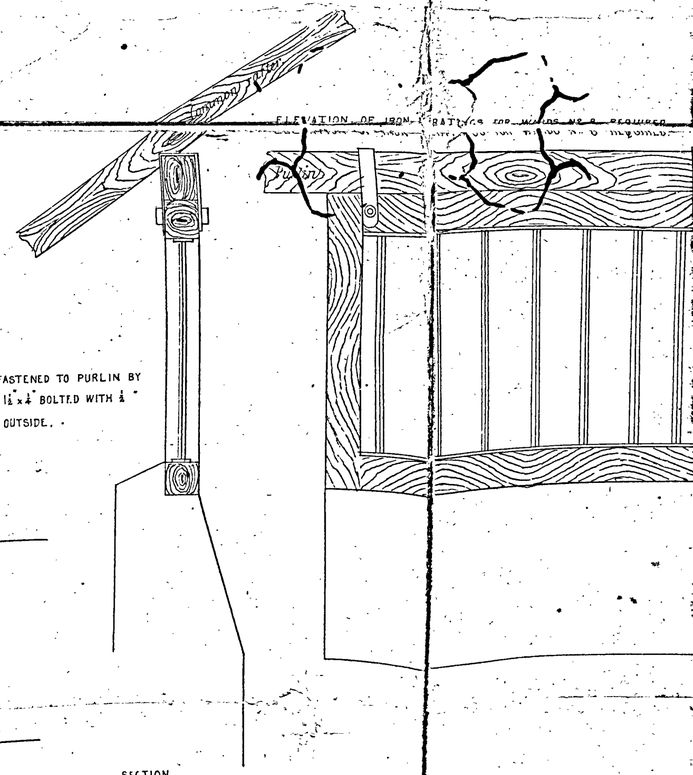

TOP OF FRAME FASTENED TO PURLIN BY 2 IRON STRAPS 1½ x ¼ BOLTED WITH ½ BOLTS ON THE OUTSIDE.

SECTION.

SCALE ONE FOOT TO AN INCH.

/Signed/ R. Chisholm. Architect.

/True Copy./


Superintendent and Manager.

Government Lithographic Press D. P. W.

Fort St. George, Madras Sept.r 1868.

TALUQ CUTCHERRY AND SUBSIDIARY JAIL.


DRAWING Nº 7.

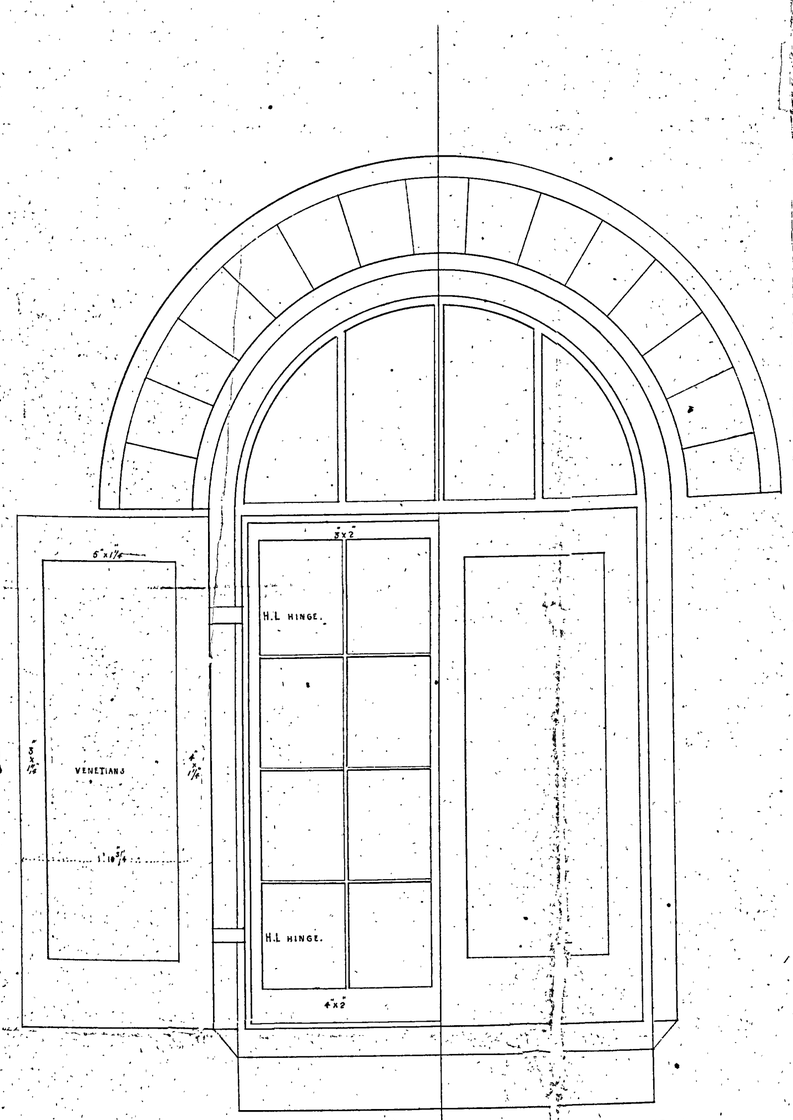


ELEVATION WITH VENETIANS OPEN

ELEVATION WITH VENETIANS CLOSED.


Nº DOORS AND WINDOWS REQUIRED COMPLETE.

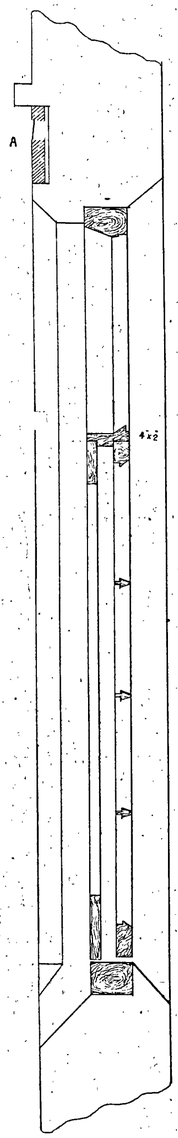

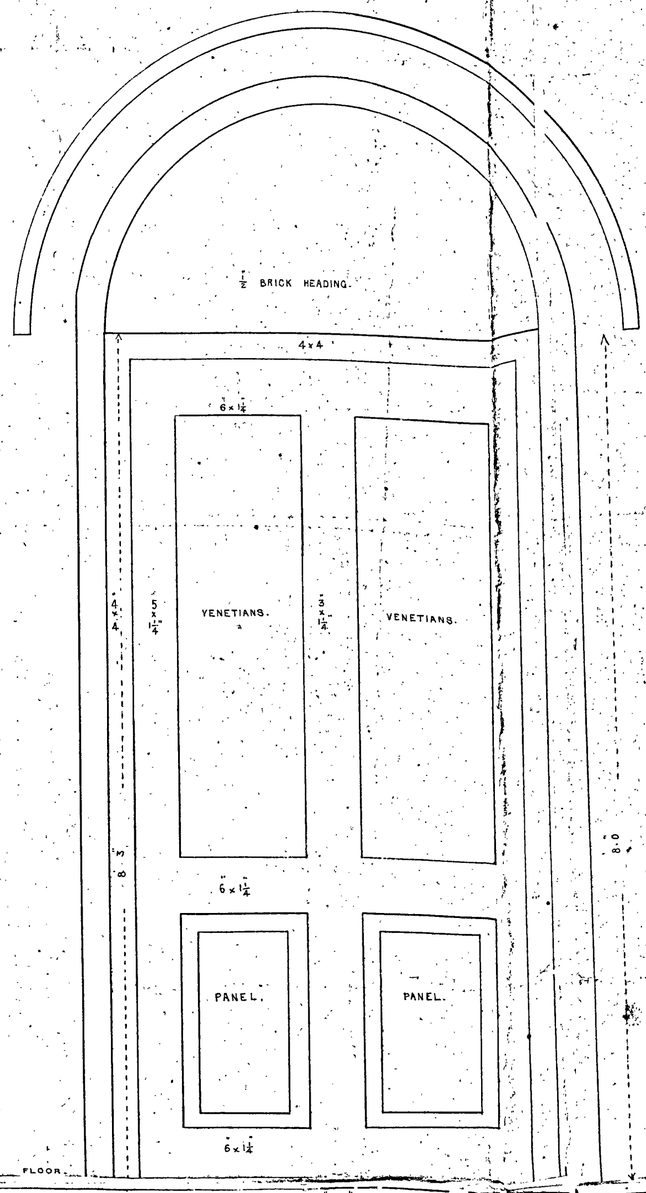


Nº 26 DOORS REQ'IRED.


E. IT IS INTENDED THAT THE SPACE A SHOULD BE FILLED IN WITH RED AND WHITE TILES ALTERNATELY SET, IN THE BRICKWORK. IF THESE ARE DIFFICULT TO PROCURE COLORED CHUNAM WILL ANSWER THE PURPOSE.

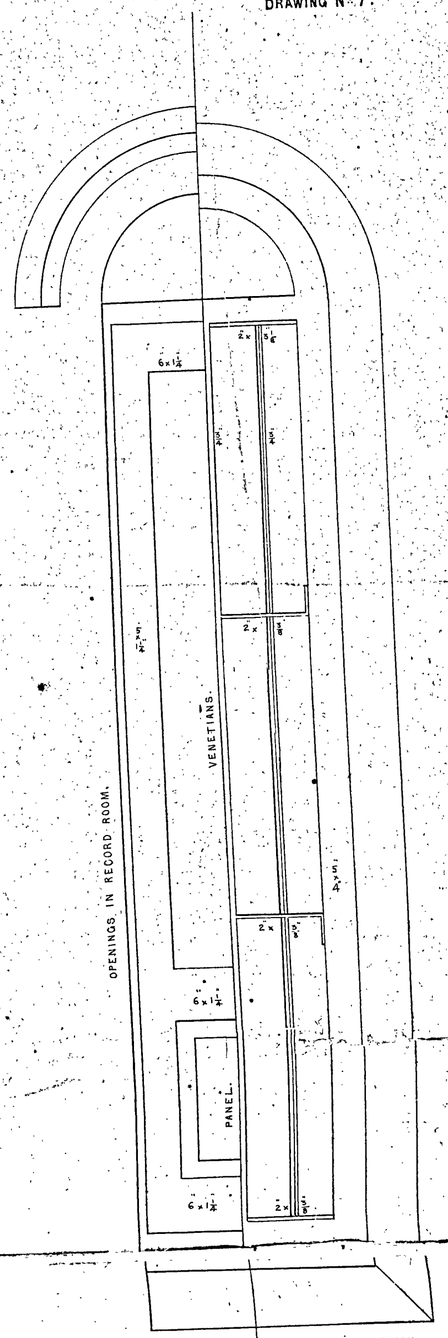


EXTERNAL ELEVATION. INTERNAL ELEVATION.

Nº 14 REQUIRED.

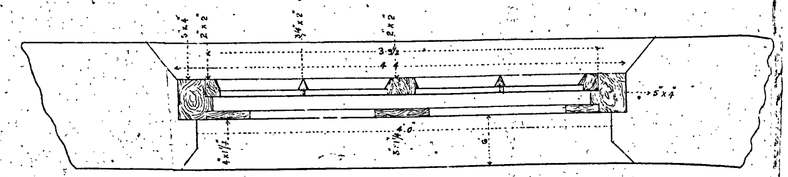

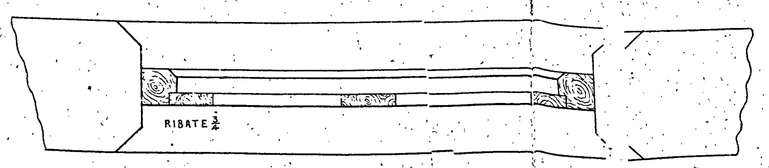

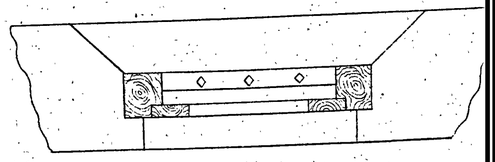

SCALE. 1. FOOT TO AN INCH.

DRAWN BY C. SARAVANAVALOO AND P. SINGARAVALOO AND LITHº BY R.J. BALDREY.

H.J. Baldrey.

Superintendent and Manager.

Govt Lithoº Press Fort St George. Madras. September 1868.


(Signed) R. Aitchison Actº

(True Copy.)

Secretary to Governm


DETAILS OF DOORS AND OPENINGS.

DRAWING Nº 8

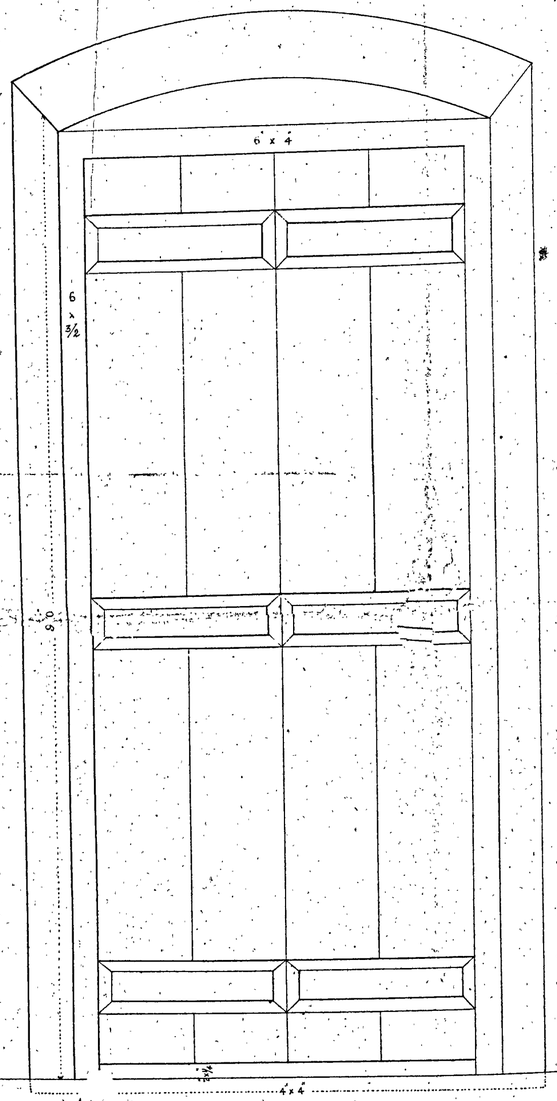


ELEVATION OF BATTEN DOOR

TREASURY

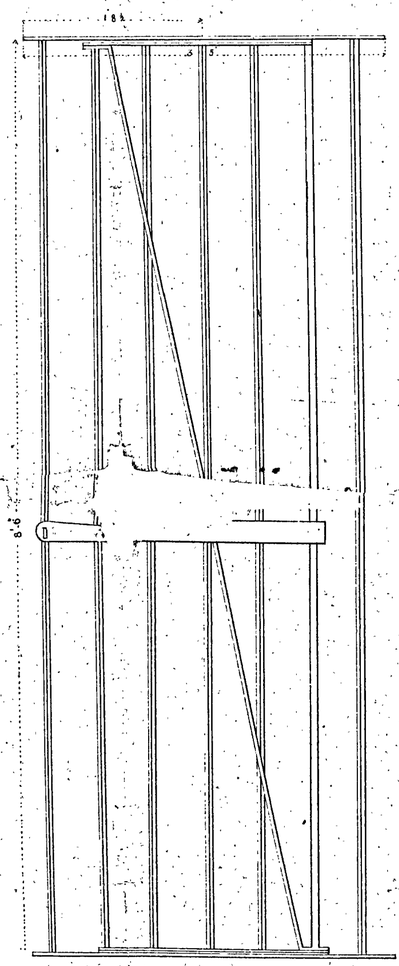


IRON DOOR

Nº 11 REQUIRED

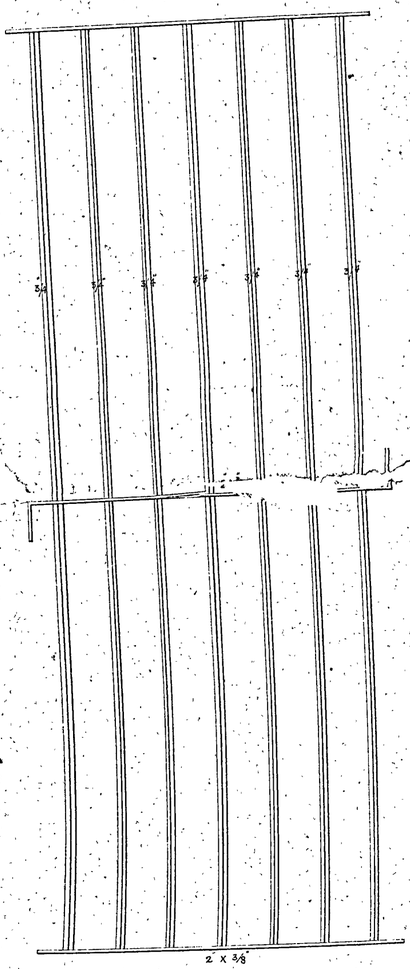

FIXED IRON GRATING

Nº 3 REQUIRED

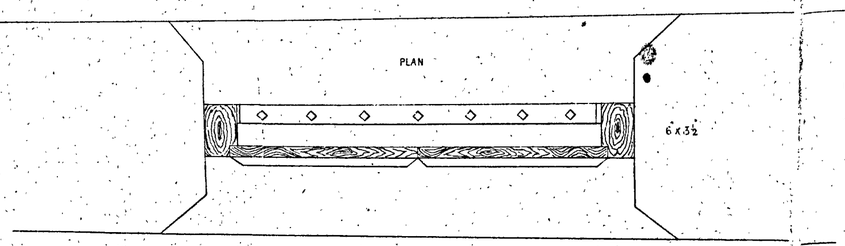

Nº 7 REQUIRED

NOTE. WHEN IRON GRATINGS ONLY ARE REQUIRED THE SCANTLING OF THE FRAME SHOULD BE 4 × 3½

NOTE, THE TWO CLEARSTEY LIGHTS IN THE TREASURY WILL BE IN ALL RESPECTS SIMILAR TO THE TREASURY DOOR ONLY MEASURING 8 × INSTEAD OF 9 × 4 AND WILL BE FITTED WITH N GRATINGS 3. 5 × 2. 4

(Signed) R. Chisholm, Arct

DRAWN BY M. JACOB AND LITHº BY R. J. BALDREY.

Kirk & Baldrey

Superintendent and Manager.

Govt Lithº Press, Fort St George.

Madras September 1868.

Colonel R E

Secretary to Government. P.W.D.