M.R. G. 1—89,000—16-10-29.

# MADRAS RECORD OFFICE.

---

## Government of Madras.

Revenue **DEPARTMENT.**

| | | |
|---|---|---|
| G.O. No. | 2323 | Press ~~Mis.~~ |
| 65-66 Dated | 4 - 9 - | 1868 |

***Not to be folded or roughly handled***

*Proceedings of the Madras Government, Revenue Department,*
*4th September* 1863.

No. 65. Read the following Proceedings of the Madras Government in the Public Works Department:—

Passing orders on letter from the Presidency Executive Engineer, forwarding a set of detailed tracings of the Talook Cutcherry drawings with the quantities. } (Here enter 1st September 1868, No. 2,791.)

No. 66. ORDER THEREON, 4th September 1868, No. 2,323.

Miscellaneous. Ordered to be recorded.

**(True Extract.)**

(Signed) H. SEWELL,
*Acting Under Secretary to Government.*

Exd. F. R. Bantleman.

No. 7. Read the following letter from R. F. CHISHOLM, Esq., C. E., Executive Engineer, Presidency, to the Secretary to Government, Public Works Department, dated Madras, 22nd August 1868, No. 203 :—

1. I have the honor to submit, for transmission to Colonel Winscom (*vide* the correspondence noted on the margin), a set of detailed tracings* of the Talook Cutcherry drawings with the quantities. There will be no difficulty in executing the building from these documents.

G. O., No. 50, dated 27th May 1868.
Do. ,, 4, ,, 3rd August ,,

* Drawings Nos. 1, 2, 4, 5, 6, 7, and 8.

2. I would recommend that the iron work be obtained on indent from the Public Works Stores, when the distance is not great, I could then inspect it before it leaves the stores. I mention this as I observe that one or two iron gratings recently fixed in the Lunatic Asylum at Kilpauk are useless as a means of protection.

3. If you will kindly furnish me with a list of the places at which Cutcherries are being constructed after the standard plans, I will have sets of tracings prepared and forwarded with the quantities.

---

TALOOK CUTCHERRY AND SUBSIDIARY JAIL.

*Abstract of quantities and Estimate of cost.*

| Quantity. | | Item. | | Rate. | Amount. |
|---|---|---|---|---|---|
| 152 | Cubic yards. | Concrete below foundations. (The rate must cover cost of excavation and filling in) ... ... ... ... ... | @ | | |
| 389 | Do. ... | Masonry in foundations and basement ... | @ | | |
| 551 | Do. ... | Masonry in mud in superstructure ... | @ | | |
| 162 | Do. ... | Masonry in chunam superstructure ... | @ | | |
| 110 | Running feet. | Inner cornice to rooms ... ... ... | @ | | |
| 153 | Do. ... | Exterior cornice with dentils. ... ... | @ | | |
| 114 | Squares ... | Tiled roofing. (The rate must cover the cost of reepers and chunam borders)... | @ | | |
| 10 | Do. ... | Terrace roofing ... ... ... ... | @ | | |
| 85 | Do. ... | Flooring ... ... ... ... ... (Stone curbing if procurable)... ... | @ | | |
| 69 | No. ... | Stones below posts and trusses ... ... | @ | | |
| 164 | Squares ... | Interior plastering ... ... ... | @ | | |
| 119 | Do. ... | Exterior pointing ... ... ... | @ | | |
| 1,117 | Cubic feet ... | Of Teak wood ... ... ... ... | @ | | |
| 2 | No. ... | Ornamental trusses in front of Cash-room ... ... ... ... ... | @ | | |
| 1,269 | Superficial ft. | Doors, including frames... ... ... | @ | | |
| 273 | Do. ... | Batten doors, including frames ... ... | @ | | |
| 20 | Do. ... | Venetians, without frames ... ... | @ | | |
| 6 | No. ... | Iron gratings, with frames ... ... | @ | | |
| 8 | Do. ... | Doors and gratings, without frames measuring 9×4 ... ... ... ... | @ | | |
| 8 | Do. ... | Do. do. 4'-0″×2'-6″ ... | @ | | |

TALOOK CUTCHERRY AND SUBSIDIARY JAIL.
*Quantities.*

| Items. | Length. | Breadth. | Depth. | Contents. | Total. |
|---|---|---|---|---|---|
| *Concrete below foundations.* | | | | | |
| Serishtadar's room ... ... ... | 73 0 | 4 0 | 0 9 | 219 | |
| Record-room... ... ... ... | 101 0 | 4 0 | 0 9 | 303 | |
| Verandah between Serishtadar's and Record-room ... ... ... | 14 6 | 4 0 | 0 9 | 44 | |
| Clerk's room... ... ... ... | 81 0 | 4 0 | 0 9 | 243 | |
| Cross walls to do. ... ... ... | 15 3 | 4 0 | 0 9 | 46 | |
| Court-house, Tahsildar's room ... | 170 6 | 4 0 | 0 9 | 511 | |
| 3 Cross walls to do. ... ... ... | 47 3 | 4 0 | 0 9 | 142 | |
| Cashier's rooms and open space ... | 40 6 | 4 0 | 0 9 | 121 | |
| Cross wall to do. ... ... ... | 12 3 | 4 0 | 0 9 | 37 | |
| Male and Female wards ... ... | 138 6 | 4 0 | 0 9 | 415 | |
| 3 Cross walls to do. ... ... ... | 36 9 | 4 0 | 0 9 | 110 | |
| Treasury-room ... ... ... | 29 6 | 4 9 | 0 9 | 105 | |
| Do. do. ... ... ... | 42 6 | 4 9 | 0 9 | 151 | |
| Inspector's rooms and Arms ... | 73 6 | 4 9 | 0 9 | 262 | |
| Circular stair-case ... ... ... | 13 9 | 13 9 | 0 9 | 142 | |
| Outer verandah round the building. | 476 0 | 3 6 | 0 9 | 1,250 | |
| Total cubic feet ... | ..... | ..... | ..... | 4,101 | |
| Total cubic yards Concrete ... | ..... | ..... | ..... | ..... | 152 |
| *Foundations including offset.* | | | | | |
| | 73 0 | 2 6 | 1 0 | 183 | |
| | 101 0 | 2 6 | 1 0 | 253 | |
| | 17 6 | 2 6 | 1 0 | 44 | |
| | 84 0 | 2 6 | 1 0 | 210 | |
| | 16 9 | 2 6 | 1 0 | 42 | |
| | 170 6 | 2 6 | 1 0 | 426 | |
| | 50 3 | 2 6 | 1 0 | 125 | |
| Foundation ... ... ... | 43 6 | 2 6 | 1 0 | 109 | |
| | 13 9 | 2 6 | 1 0 | 34 | |
| | 138 6 | 2 6 | 1 0 | 347 | |
| | 41 3 | 2 6 | 1 0 | 103 | |
| | 32 6 | 2 6 | 1 0 | 82 | |
| | 41 0 | 3 3 | 1 0 | 133 | |
| | 74 9 | 3 3 | 1 0 | 243 | |
| | 12 3 | 12 3 | 1 0 | 150 | |
| | 476 0 | 1 6 | 1 0 | 714 | |
| | 73 0 | 1 9 | 3 0 | 383 | |
| | 101 0 | 1 9 | 3 0 | 530 | |
| | 19 0 | 1 9 | 3 0 | 100 | |
| | 85 6 | 1 9 | 3 0 | 449 | |
| | 17 6 | 1 9 | 3 0 | 91 | |
| | 170 6 | 1 9 | 4 6 | 1,343 | |
| | 52 6 | 1 9 | 4 6 | 413 | |
| | 45 0 | 1 9 | 3 0 | 236 | |
| Basement ... ... ... | 14 6 | 1 9 | 3 0 | 76 | |
| | 138 6 | 1 9 | 3 0 | 727 | |
| | 43 6 | 1 9 | 3 0 | 228 | |
| | 34 0 | 1 9 | 3 0 | 179 | |
| | 39 6 | 2 6 | 3 0 | 296 | |
| | 74 3 | 2 6 | 3 0 | 556 | |
| | 11 6 | 11 6 | 3 0 | 397 | |
| | 476 0 | 0 9 | 3 0 | 1,071 | |
| Steps ... ... ... ... | ..... | ..... | ..... | 230 | |
| | | | | 10,503 | |
| Total cubic yards ... | ..... | ..... | ..... | ..... | 389 |

*Proceedings of the Madras Government, Public Works Department,*
1*st September* 1868.

| Items. | Length. | Breadth. | Depth. | Contents | Total. |
|---|---|---|---|---|---|
| *Superstructure, brick-in-mud.* | | | | | |
| | 73 0 | 1 3 | 12 6 | 1,140 | |
| | 101 0 | 1 3 | 12 6 | 1,578 | |
| | 20 0 | 1 3 | 12 6 | 313 | |
| | 87 6 | 1 3 | 12 3 | 1,340 | |
| | 18 0 | 1 3 | 12 6 | 281 | |
| | 170 6 | 1 3 | 11 0 | 2,344 | |
| | 54 0 | 1 3 | 11 0 | 743 | |
| | 26 0 | 1 3 | 12 6 | 407 | |
| | 15 0 | 1 3 | 12 6 | 234 | |
| | 138 6 | 1 3 | 12 6 | 2,164 | |
| | 45 0 | 1 3 | 12 6 | 703 | |
| | 35 0 | 1 3 | 20 0 | 875 | |
| | 39 0 | 2 0 | 20 0 | 1,590 | |
| | 75 3 | 2 0 | 20 0 | 3,010 | |
| | 11 0 | 11 0 | 26 0 | 3,146 | |
| 5 Gables ... ... ... | 19 3 | 1 3 | 3 0 | 360 | |
| | 16 3 | 1 3 | 3 0 | 427 | |
| | | | | 20,655 | |
| Deduct arch-work ... | ..... | ..... | 627 | | |
| Do. brick-in-chunam . | ..... | ..... | 3,742 | | |
| Do. openings ... | ..... | ..... | 1,396 | 5,765 | |
| Total cubic feet ... | ..... | ..... | ..... | 14,890 | |
| Total cubic yards ... | ..... | ..... | ..... | ..... | 551 |
| *Deductions to springing of arches only.* | | | | | |
| 14 Doors, each ... ... ... | 8 0 | 1 3 | 9 0 | 315 | |
| 27 Do. ,, ... ... ... | 4 0 | 1 3 | 8 0 | 1,0 0 | |
| 7 Do. ,, ... ... ... | 4 0 | 2 0 | 6 0 | 336 | |
| Window ... ... ... ... | 4 0 | 1 3 | 5 0 | 25 | |
| 6 Openings, square heads, two-thirds of height ... ... ... ... | 4 0 | 1 3 | 6 0 | 180 | |
| NOTE.—No deductions made for clearstorey lights. | | | | | |
| Total openings ... | ..... | ..... | ..... | 1,936 | |
| *Brick-in-chunam work round all openings, at the corners, and along the tops of walls.* | | | | | |
| 22 Sides of doors, each ... ... | 16 0 | 1 3 | 1 0 | 440 | |
| 13 Do. ,, ... ... | 13 0 | 1 3 | 1 0 | 211 | |
| 5 Do. ,, ... ... | 16 0 | 2 0 | 1 0 | 160 | |
| 12 Windows ,, ... ... | 20 0 | 1 3 | 1 0 | 300 | |
| 10 Gratings ,, ... ... | 15 6 | 1 3 | 1 0 | 194 | |
| 1 Do. ,, ... ... | 15 6 | 2 0 | 1 0 | 31 | |
| Corners, each ... ... ... | 11 0 | 1 3 | 2 6 | 138 | |
| 8 Do. ,, ... ... ... | 12 6 | 1 3 | 2 6 | 312 | |
| 6 Do. ,, ... ... ... | 20 0 | 2 0 | 3 0 | 720 | |
| Top of walls and gables ... ... | 805 0 | 1 3 | 1 0 | 1,006 | |
| Do. do. ... ... | 115 0 | 2 0 | 1 0 | 230 | |
| Total brick-in-chunam ... | ..... | ..... | ..... | 3,712 | 3,742 |
| 21 Flat arches over gratings ... | 6 0 | 1 3 | 1 6 | 177 | |
| 5 Do. do. ... | 6 0 | 2 0 | 1 6 | 68 | |
| 25 Arches over doors ... ... | 8 0 | 1 3 | 1 6 | 281 | |
| 12 Do. windows ... ... | 6 0 | 1 3 | 1 6 | 101 | |
| Total cubic feet ... | ..... | ..... | ..... | 627 | 627 |
| Cubic feet ... | ..... | ..... | ..... | ..... | 4,369 |
| Total cubic yards brick-in-chunam in superstructure ... ... | ..... | ..... | ..... | ..... | 162 |

| Items. | Length. | Breadth. | Depth. | Contents. | Total. |
|---|---|---|---|---|---|
| 153 Running feet of Dental Cornice work in front of Serishtadar's room, Arms, and round the circular staircase. Parapet over circular staircase and Arms, &c. | | | | | |
| *Roof.* | | | | | |
| Serishtadar's and Record-room ... | 70 0 | 25 0 | ..... | 1,750 | |
| Court-house and Tahsildar's room ... | 70 3 | 24 6 | ..... | 1,721 | |
| Clerk's room ... ... ... ... | 43 3 | 24 6 | ..... | 1,060 | |
| Cashier's open space, and Police guards | 43 3 | 22 0 | ..... | 951 | |
| Male and Female wards ... ... | 54 3 | 22 0 | ..... | 1,194 | |
| Verandah to the Jail ... ... | 128 0 | 9 0 | ..... | 1,152 | |
| Do. to Police and Cash-room... | 77 0 | 15 0 | ..... | 1,155 | |
| Do. to Clerk's Office ... ... | 86 6 | 9 0 | ..... | 779 | |
| Do. to Court-house ... ... | 180 0 | 9 0 | ..... | 1,620 | |
| | | | | 11,382 | |
| Total Squares tiled Roofing ... | ..... | ..... | ..... | ..... | 114 |
| *Terrace Roofing.* | | | | | |
| Treasury-room ... ... ... | 22 0 | 19 3 | ..... | 424 | |
| Inspector's rooms and Arms ... | 54 0 | 10 0 | ..... | 540 | |
| | | | | 964 | |
| Total Squares terrace Roofing ... | ..... | ..... | ..... | ..... | 10 |
| *Flooring.* | | | | | |
| Serishtadar's and Record-room ... | 62 0 | 15 0 | ..... | 930 | |
| Clerk's room... ... ... ... | 42 0 | 18 0 | ..... | 756 | |
| Court-house and Tahsildar's room ... | 64 0 | 18 0 | ..... | 1,152 | |
| Cashier's open space and Police ... | 42 0 | 15 0 | ..... | 630 | |
| Between verandah and main room to do. ... ... ... ... | 52 0 | 1 3 | ..... | 65 | |
| Treasury-room ... ... ... | 20 0 | 18 0 | ..... | 360 | |
| Inspector's rooms and Arms ... | 41 0 | 8 0 | ..... | 328 | |
| Male and Female wards ... ... | 48 0 | 15 0 | ..... | 720 | |
| Verandah to the Jail ... ... | 125 0 | 6 0 | ..... | 750 | |
| Do. Police and Cash-room ... | 77 0 | 11 6 | ..... | 885 | |
| Do. Clerk's room ... ... | 86 6 | 6 0 | ..... | 519 | |
| Court-house and Tahsildar's room ... | 176 0 | 6 0 | ..... | 1,056 | |
| Door-ways ... ... ... ... | 161 0 | 0 9 | ..... | 121 | |
| Steps ... ... ... ... | ..... | ..... | ..... | 270 | |
| | | | | 8,542 | |
| Total Squares Flooring ... | ..... | ..... | ..... | ..... | 85 |
| *Interior Plastering.* | | | | | |
| Serishtadar's room ... ... ... | 68 0 | 13 0 | ..... | 884 | |
| Verandah ... ... ... ... | 50 0 | 13 0 | ..... | 650 | |
| Record-room... ... ... ... | 96 0 | 13 0 | ..... | 1,248 | |
| Clerk's room... ... ... ... | 156 0 | 13 0 | ..... | 2,028 | |
| Court-house and Tahsildar's room ... | 272 0 | 11 6 | ..... | 3,128 | |
| Cashier's room ... ... ... | 54 0 | 13 0 | ..... | 702 | |
| Treasury-room ... ... ... | 76 0 | 19 6 | ..... | 1,482 | |
| Inspector's room ... ... ... | 64 0 | 19 6 | ..... | 1,248 | |
| Arms... ... ... ... ... | 50 0 | 19 6 | ..... | 975 | |
| Jail ... ... ... ... ... | 216 0 | 13 0 | ..... | 2,808 | |
| 11 Gables, ... ... ... each | 19 3 | 3 0 | ..... | 635 | |
| 13 Do. ... ... ... ,, | 16 3 | 3 0 | ..... | 634 | |
| | | | | 16,422 | |
| Total Squares interior Plastering... | ..... | ..... | ..... | ..... | 164 |

*Proceedings of the Madras Government, Public Works Department,*
*1st September* 1868.

| Items. | Length. | Breadth. | Depth. | Contents. | Total. |
|---|---|---|---|---|---|
| *Exterior Pointing.* | | | | | |
| Outer wall of Serishtadar's room ... | 31 0 | 13 0 | ..... | 403 | |
| Do. of Clerk's room ... ... | 74 6 | 13 0 | ..... | 968 | |
| Do. of Court-house ... ... | 173 0 | 11 6 | ..... | 1,990 | |
| Do. of Record-room ... ... | 102 0 | 13 0 | ..... | 1,326 | |
| Do. Cash-room ... ... | 26 6 | 13 0 | ..... | 344 | |
| Do. in the openings ... ... | 35 0 | 13 0 | ..... | 455 | |
| Gables in do. ... ... ... | 35 0 | 3 0 | ..... | 105 | |
| Outer wall of Treasury ... ... | 127 0 | 18 0 | ..... | 2,286 | |
| Do. of Jail ... ... ... | 143 6 | 13 0 | ..... | 1,866 | |
| Basement all round ... ... ... | 437 0 | 3 0 | ..... | 1,311 | |
| Do. Court-house ... ... | 197 0 | 4 6 | ..... | 886 | |
| | | | | 11,940 | |
| Total Squares exterior Pointing... | ..... | ..... | ..... | ..... | 119 |
| *Wood-work.* | | | | | |
| 4 Tie beams ... ... ... | 20 3 | 0 8 | 0 4 | 18 | |
| 5 Do. ... ... ... ... | 18 0 | 0 6 | 0 4 | 15 | |
| 8 Struts ... ... ... ... | 5 6 | 0 3 | 0 4 | 4 | |
| 10 Do. ... ... ... ... | 4 9 | 0 3 | 0 3 | 3 | |
| 8 Principal rafters ... ... | 11 6 | 0 5 | 0 4 | 13 | |
| 10 Do. do. ... ... | 9 8 | 0 4 | 0 4 | 11 | |
| 2 Hip rafters ... ... | 19 0 | 0 6 | 0 4 | 6 | |
| 8 Hip rafters ... ... | 16 0 | 0 6 | 0 4 | 21 | |
| 12 Hip rafters ... ... | 13 0 | 0 5 | 0 4 | 22 | |
| Ridge Pole. } Court-house ... | 59 0 | 0 9 | 0 3 | 11 | |
| 2 Purlins. } ... ... | 64 0 | 0 9 | 0 7 | 56 | |
| 2 Do. ... ... ... ... | 68 0 | 0 6 | 0 5 | 28 | |
| Ridge Pole ... ... ... ... | 39 0 | 0 9 | 0 3 | 7 | |
| 2 Purlins ... ... ... ... | 45 0 | 0 9 | 0 7 | 37 | |
| 2 Do. ... ... ... ... | 38 0 | 0 6 | 0 5 | 16 | |
| Ridge ... ... ... ... | 56 0 | 0 7 | 0 3 | 8 | |
| 2 Purlins ... ... ... ... | 61 0 | 0 7 | 0 5 | 30 | |
| 2 Do. ... ... ... ... | 67 0 | 0 5 | 0 4 | 19 | |
| Ridge ... ... ... ... | 27 0 | 0 7 | 0 3 | 4 | |
| 2 Purlins ... ... ... ... | 27 0 | 0 7 | 0 5 | 13 | |
| 2 Do. ... ... ... ... | 27 0 | 0 5 | 0 4 | 8 | |
| Ridge beam ... ... ... ... | 20 0 | 0 9 | 0 3 | 4 | |
| 7 Purlins, each ... ... ... | 20 0 | 0 7 | 0 5 | 34 | |
| Ridge beam ... ... ... ... | 36 0 | 0 7 | 0 5 | 9 | |
| 2 Purlins, each ... ... ... | 46 0 | 0 7 | 0 5 | 22 | |
| 2 Do. ... ... ... | 68 0 | 0 5 | 0 4 | 19 | |
| 2 Beams, for Treasury ... ... | 20 0 | 1 3 | 0 10 | 42 | |
| 15 Joists, each ... ... ... | 22 0 | 0 4½ | 0 2½ | 26 | |
| 38 Do. for Inspector's room and Arms ... ... ... ... | 10 0 | 0 5 | 0 2½ | 33 | |
| 74 Rafters, 1 foot 6 inches apart ... | 42 0 | 0 4 | 0 3 | 223 | |
| 21 Do. do. ... | 50 0 | 0 4 | 0 3 | 88 | |
| 4 Do. do. ... | 10 0 | 0 4 | 0 3 | 3 | |
| 44 Do. do. ... | 38 0 | 0 3½ | 0 2½ | 10 | |
| 46 Do. do. ... | 24 0 | 0 3½ | 0 2½ | 67 | |
| Brestsummers ... ... ... | 488 0 | 0 5 | 0 5 | 85 | |
| 52 Struts ... ... ... ... | 4 6 | 0 2½ | 0 2½ | 9 | |
| 8 Posts ... ... ... ... | 6 6 | 0 5 | 0 5 | 9 | |
| 2 Do. ... ... ... ... | 12 0 | 0 7 | 0 7 | 8 | |
| 44 Do. ... ... ... ... | 10 0 | 0 5 | 0 5 | 76 | |
| | | | | 1,117 | |
| Total cubic feet wrought Teak... | ..... | ..... | ..... | ..... | 1,117 |
| Wooden ornamental frame in front of Cash-room ... ... ... ... | No. 2. | | | | |

| Items. | Length. | Breadth. | Depth. | Contents. | Total. |
|---|---|---|---|---|---|
| *Doors and Windows including frames and painting.* | | | | | |
| 1 Window head taken square, Serishtadar's room ... ... ... | 7 6 | ..... | 4 0 | 30 | |
| 26 Venetian doors ... ... ... | 8 3 | ..... | 4 4 | 929 | |
| 14 Do. ... ... ... | 9 0 | ..... | 2 4 | 294 | |
| 2 Window heads ... ... ... | 4 0 | ..... | 2 0 | 16 | |
| Total doors with frames... | ..... | ..... | ..... | 1,269 | |
| Batten doors with frames, No. 7 ... | 9 0 | ..... | 4 4 | 273 | |
| Total batten doors with frames... | ..... | ..... | ..... | ..... | 273 |
| Venetians without frames ... ... | 5 0 | ..... | 4 0 | 20 | |
| Total Venetians without frames... | ..... | ..... | ..... | ..... | 20 |
| Iron doors or gratings with frames, No. 6 ... ... ... ... | 9 0 | ..... | 4 4 | 234 | |
| Iron doors or gratings without frames— | | | | | |
| No. 8 ... ... ... ... | 9 0 | ..... | 4 0 | 288 | |
| No. 8 ... ... ... ... | 4 0 | ..... | 2 6 | 80 | |

(Signed) R. F. CHISHOLM, C. E.,
*Executive Engineer, Presidency.*

No. 8. ORDER THEREON, 1st September 1868, No. 2,791.

CIVIL WORKS, No. 2.

1. Resolved that the plans received with this letter together with the Statement of quantities and Abstract Estimate referred to in paragraph 1 be circulated to the Superintending Engineers in continuation of G. O. No. 3,552 of the 18th November 1867.

2. Attention is drawn to the suggestion in paragraph 2.

(True Extract.)


Colonel, R. E.,
*Secretary to Government.*

To the Superintending Engineers,
,, Revenue Department,
,, Judicial do.
,, Board of Revenue,
To Captain R. B. Kennedy,
} With Plans, ~~Statement, &c.~~


Exd. T. O'Connor.

DRAWING Nº 1.


# TALOOK CUTCHERRY AND SUBSIDIARY JAIL.

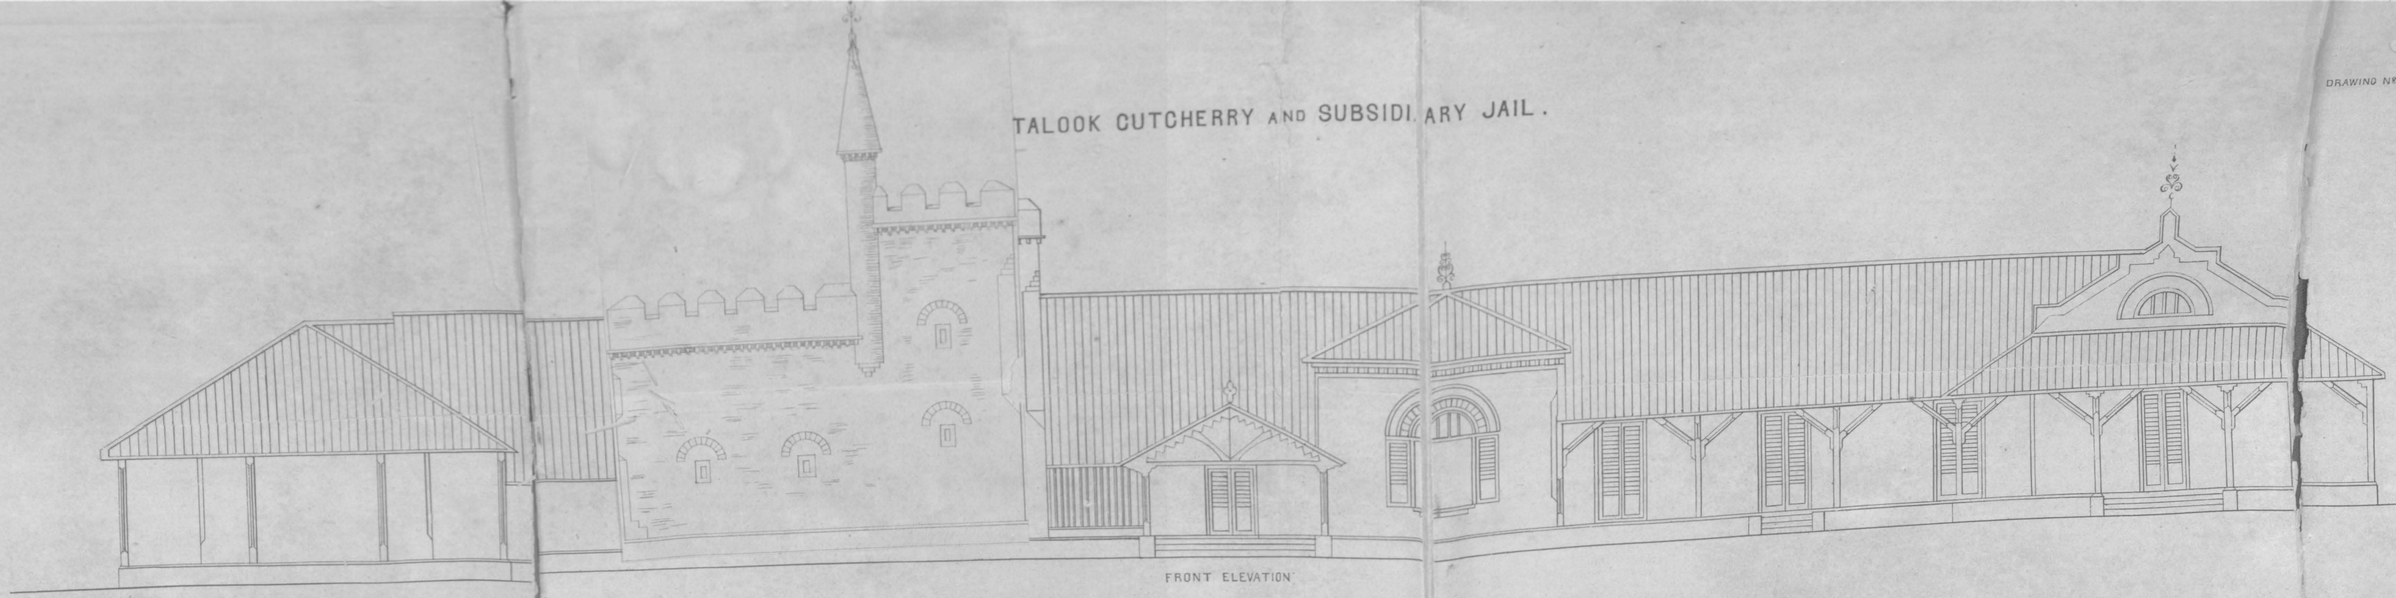

FRONT ELEVATION

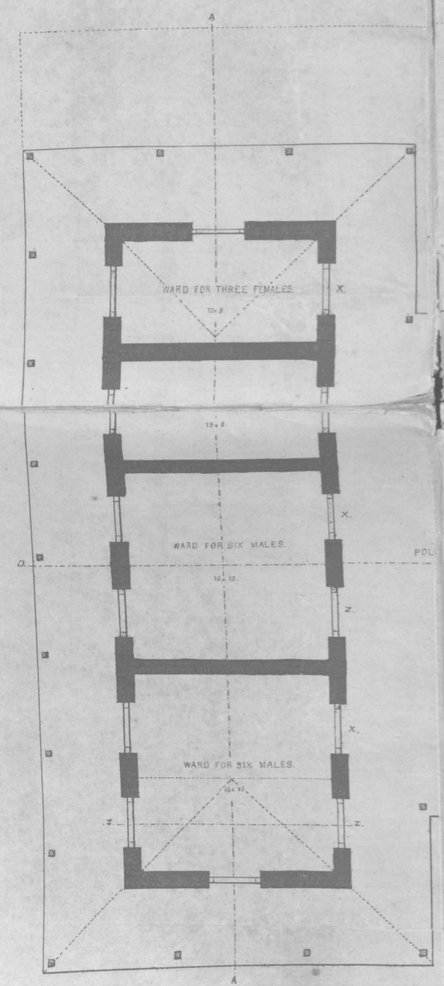


NOTE. THE THICK DOTTED LINES SHOW THE CONSTRUCTION OF THE ROOF.

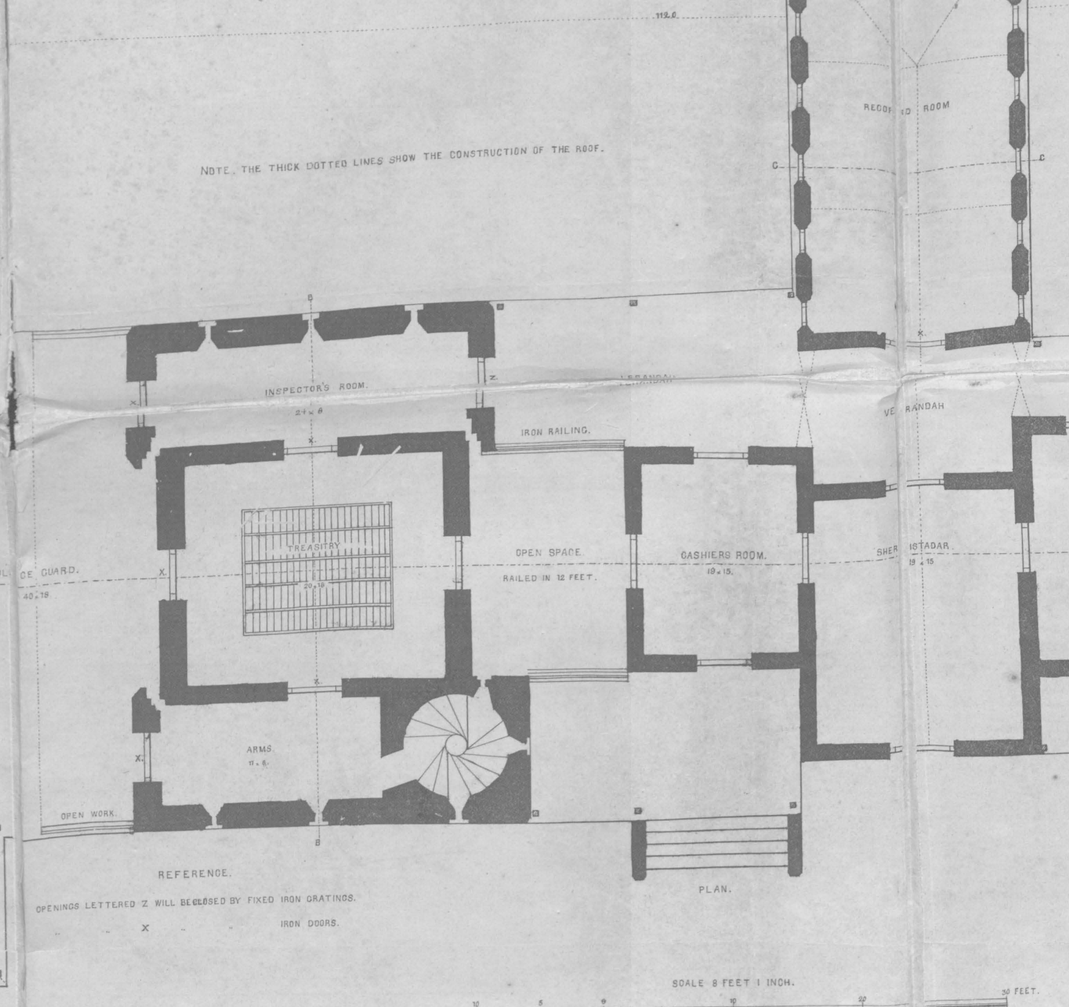


REFERENCE.

OPENINGS LETTERED 'Z' WILL BE CLOSED BY FIXED IRON GRATINGS.

X - - - - IRON DOORS.


PLAN.

SCALE 8 FEET 1 INCH.

10 5 0 10 20 30 FEET.

DRAWN BY T. GANAPATHY LITHR BY R.J. BALDREY GOVT LITHS PRESS FORT ST. GEORGE

ALL WALLS EXCEPT THE TREASURY WALLS WILL BE A BRICK AND A HALF THICK ABOUT 1½

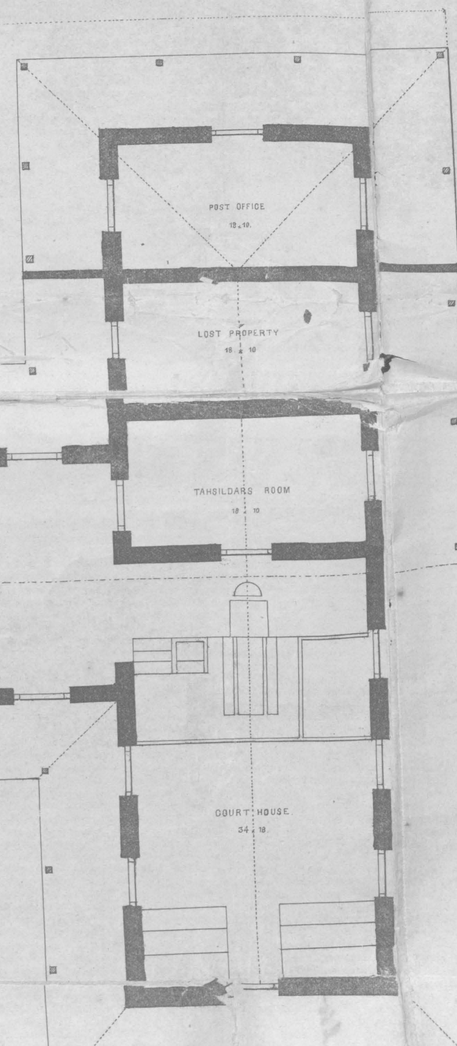


(Signed) R. Chisholm Arct


(Signed) T. Baldrey

Superintendent and Manager


# TALUQ CUTCHERRY AND SUBSIDIARY JAIL.

DRAWING Nº 2.


END ELEVATION OF TALOOK CUTCHERRY

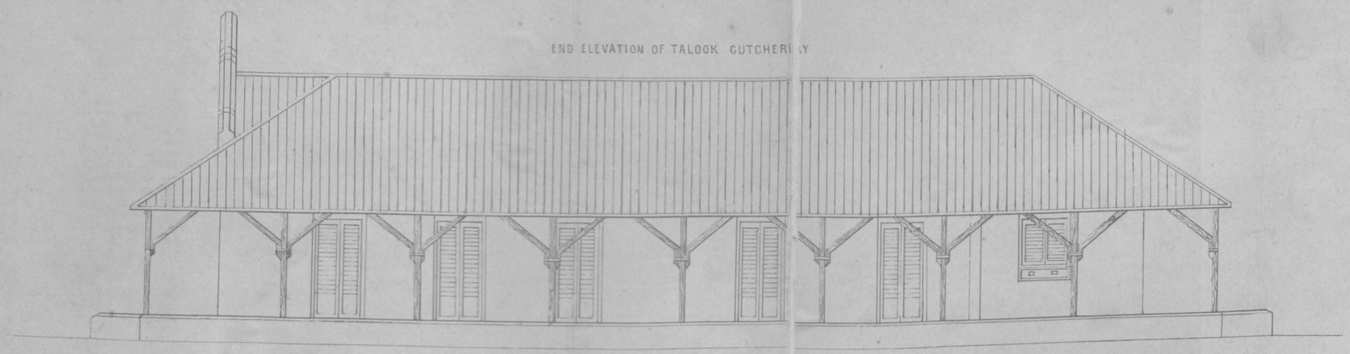


END ELEVATION OF JAIL

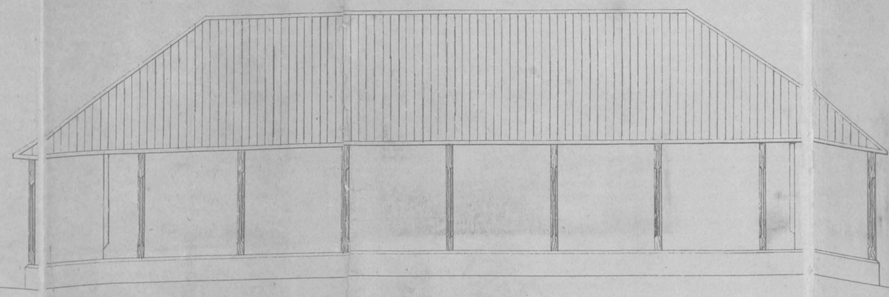

CROSS SECTION OF TREASURY LINE B.B.

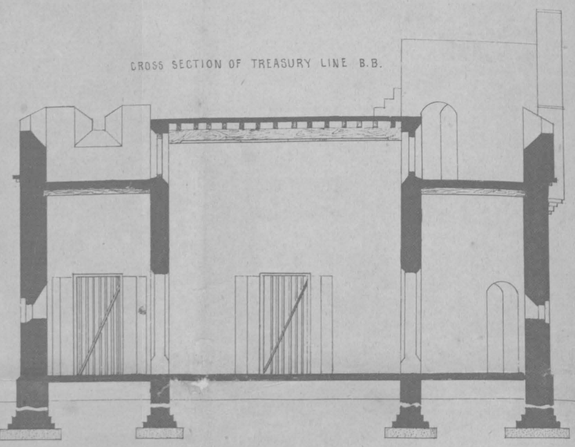


CROSS SECTION OF RECORD ROOM LINE C.C.

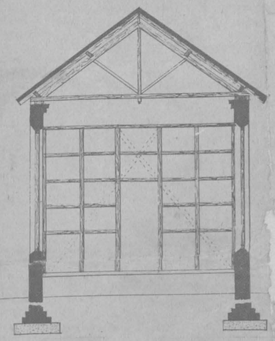


PART ELEVATION OF RECORD ROOM.



LONGITUDINAL SECTION OF JAIL LINE A.A.

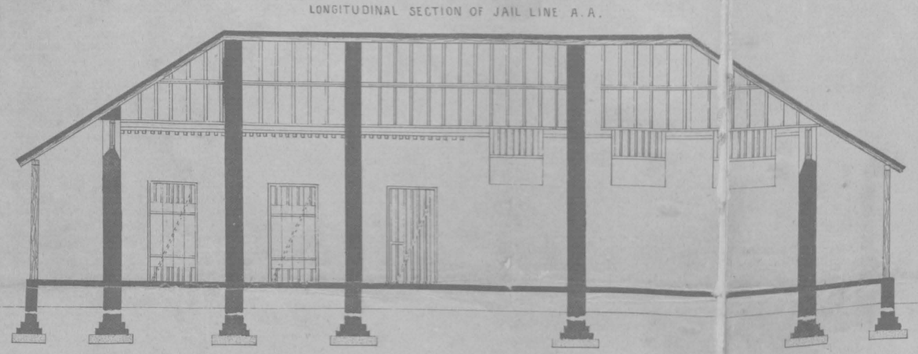


LONGITUDINAL SECTION OF BUILDING LINE D.D.

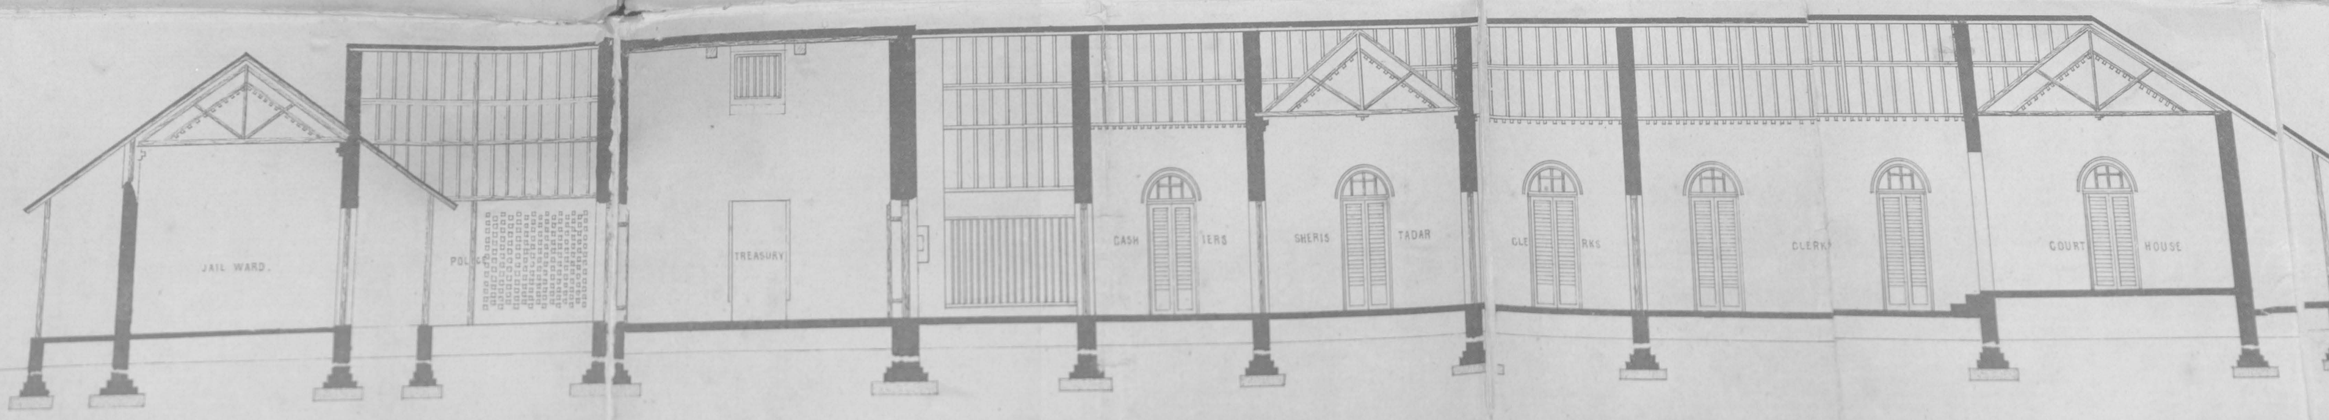


# DESIGN FOR A TALOOK CUTCHERRY AND SUBSIDIARY JAIL

PLAN Nº1 DRAWING Nº3


SIDE ELEVATION OF RYOTS SHED

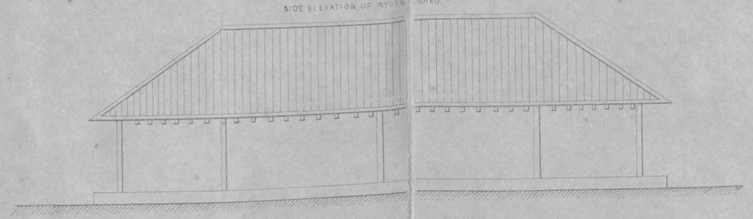


END ELEVATION OF JAIL LATRINE

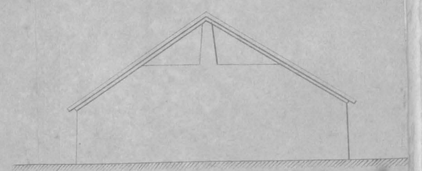


SIDE ELEVATION OF JAIL LATRINE

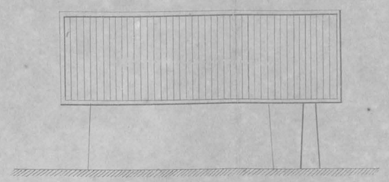

ELEVATION OF COOK ROOM

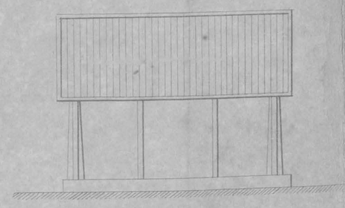


CROSS SECTION OF RYOTS SHED

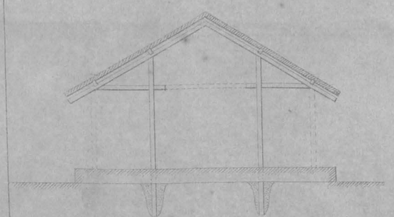


PLAN OF RYOTS SHED




CROSS SECTION OF JAIL LATRINE

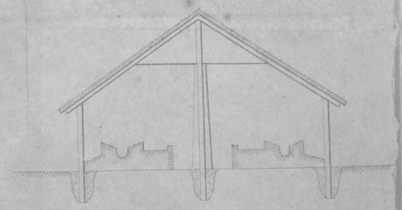


PLAN OF JAIL LATRINE

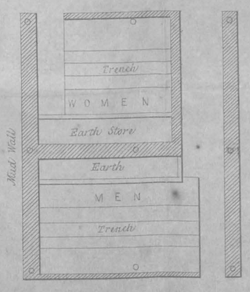



PLAN OF COOK ROOM

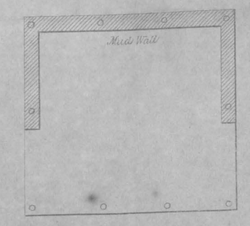



CROSS SECTION OF HOSPITAL SHED

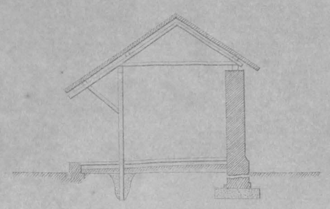


BACK ELEVATION OF HOSPITAL SHED

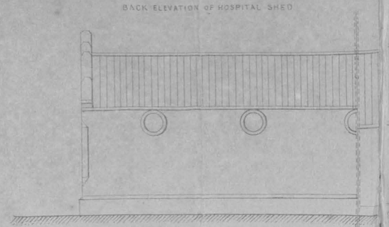


FRONT ELEVATION OF HOSPITAL SHED

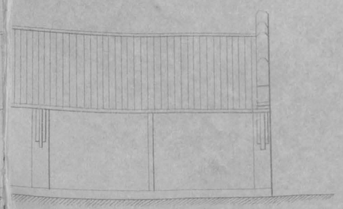

END ELEVATION OF PUBLIC LATRINE

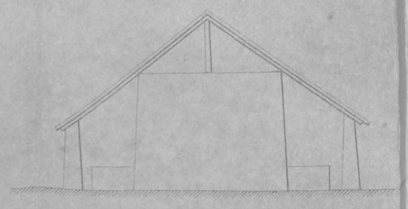


SIDE ELEVATION OF PUBLIC LATRINE

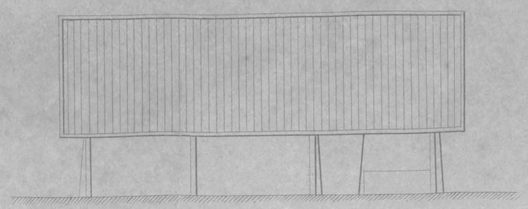


NOTE The latrines and Cooky Shed will be built with mud walling


END ELEVATION OF HOSPITAL SHED




PLAN OF HOSPITAL SHED

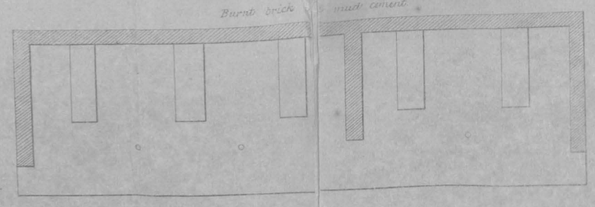


CROSS SECTION OF PUBLIC LATRINE

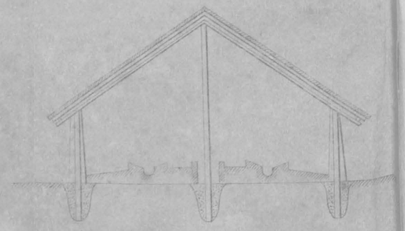

PLAN OF PUBLIC LATRINE

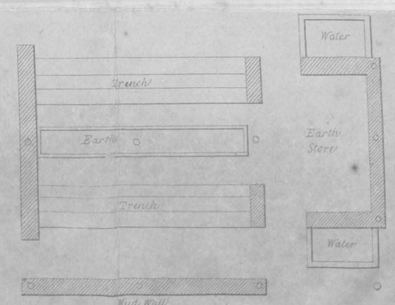


*Approximate Estimates*

| | |
|---|---|
| Ryots Shed Rupees | 870 |
| Hospital Shed | 100 |
| Jail Latrine | 350 |
| Public ditto | 850 |
| Cooks Shed | 260 |

[True Copy]

Colonel

# TALUQ CUTCHERY AND SUBSIDIARY JAIL.


## DETAILS OF TRUSSES.

DRAWIN

SECTION THROUGH A.A.



SECTION THROUGH B.B.







SECTION OF HEAD OF TRUSS.




TRUSS 18 FEET SPAN FRAMED WITH A CAMBER OF 4 INCHES.

№ 4 REQUIRED.

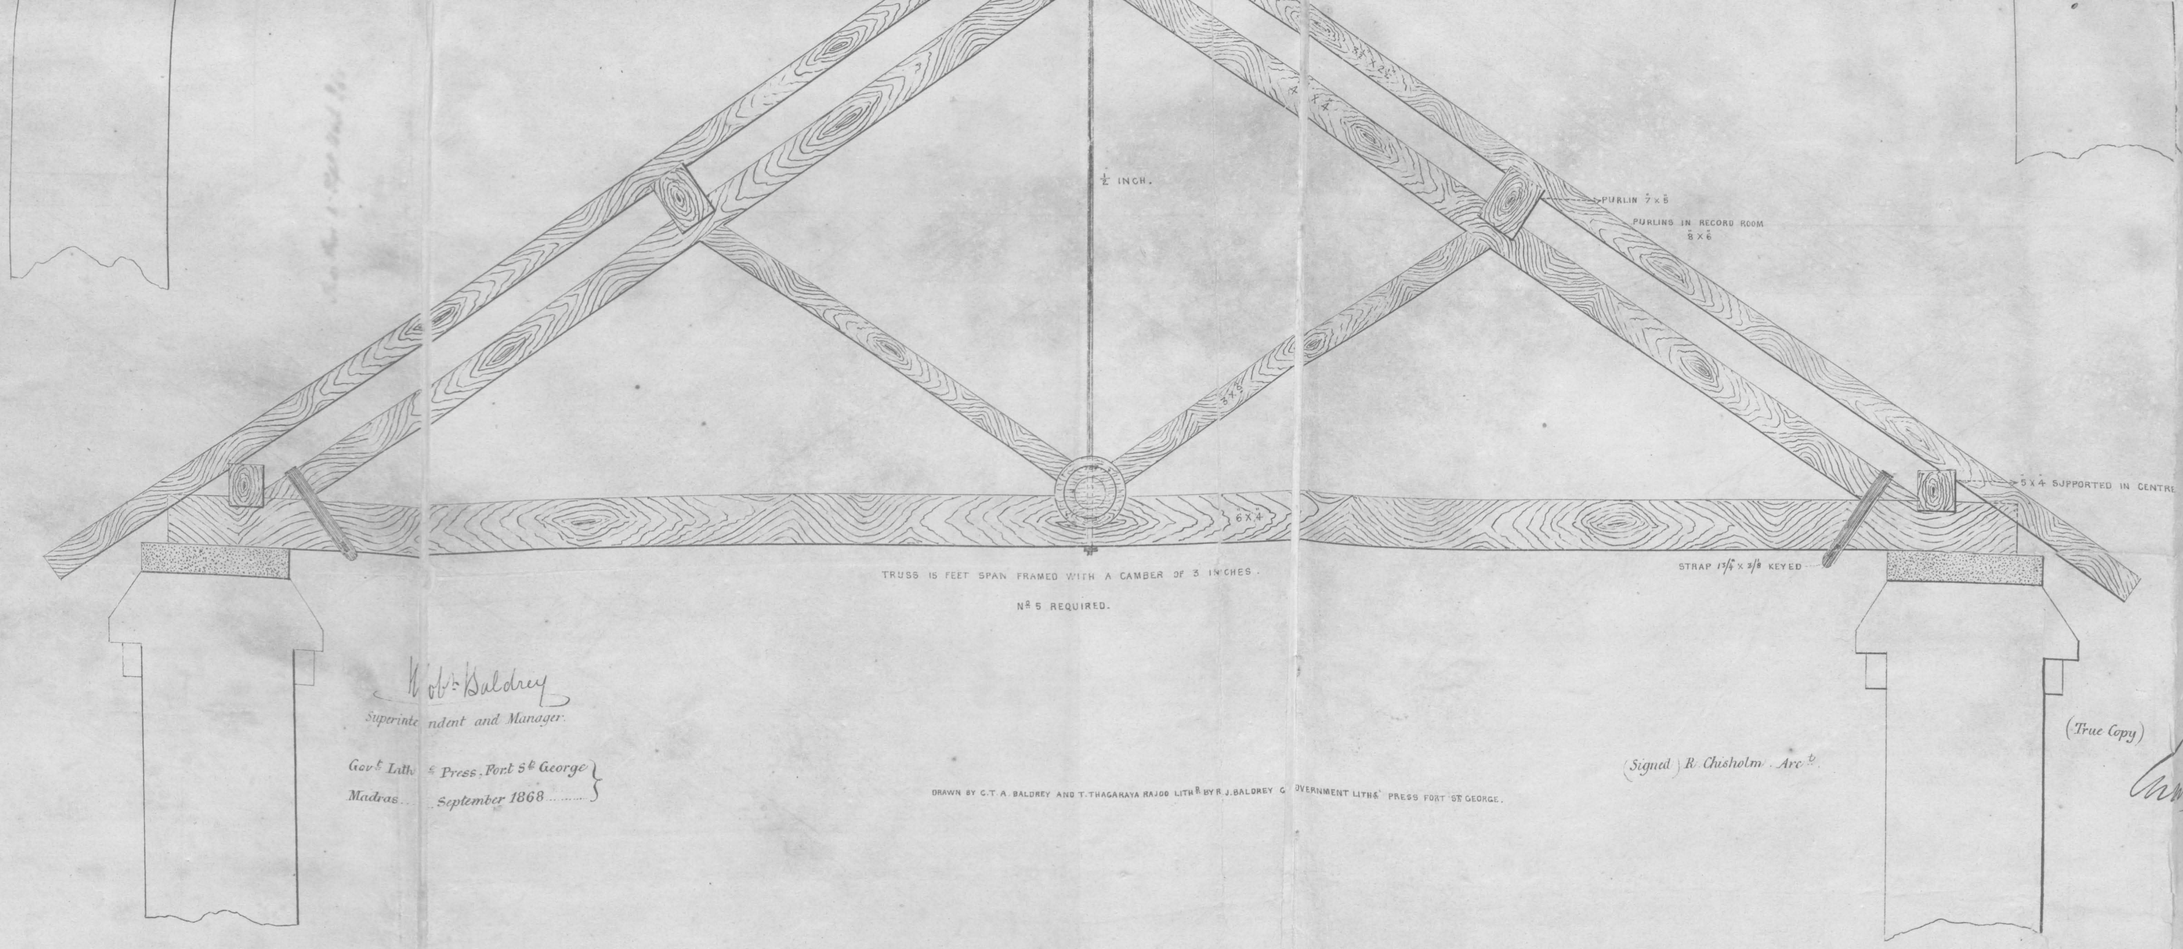


TRUSS 15 FEET SPAN FRAMED WITH A CAMBER OF 3 INCHES.

Nos 5 REQUIRED.

Wm. Baldrey

Superintendent and Manager.

Govt Lith. Press, Fort St George

Madras, September 1868.

DRAWN BY C.T.A. BALDREY AND T. THAGARAYA RAJOO LITHO BY R.J. BALDREY GOVERNMENT LITHO PRESS FORT ST GEORGE.

(Signed) R. Chisholm, Arct.


(True Copy)

Secretary to Govern


# DESIGN FOR A TALOOK CUTCHERRY AND SUBSIDIARY JAIL

PLAN No 1 DRAWI


SIDE ELEVATION OF RYOTS SHED

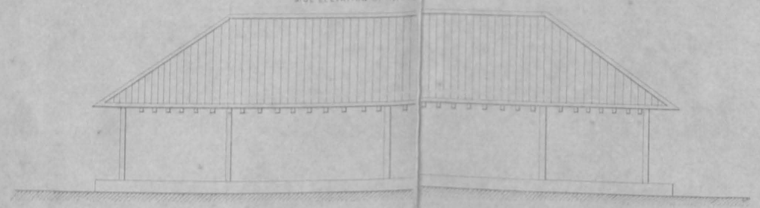


END ELEVATION OF JAIL LATRINE

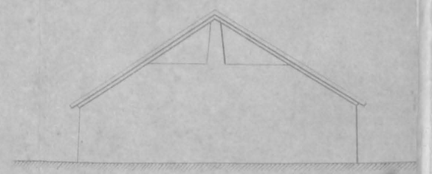


SIDE ELEVATION OF JAIL LATRINE

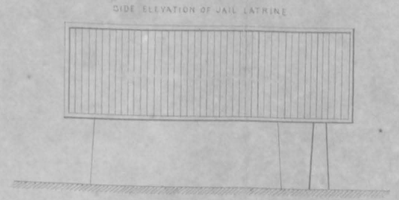


ELEVATION OF COOK ROOM

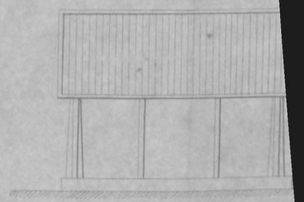

CROSS SECTION OF RYOTS SHED

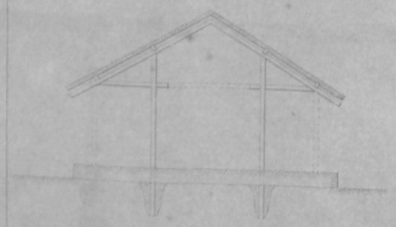


PLAN OF RYOTS SHED

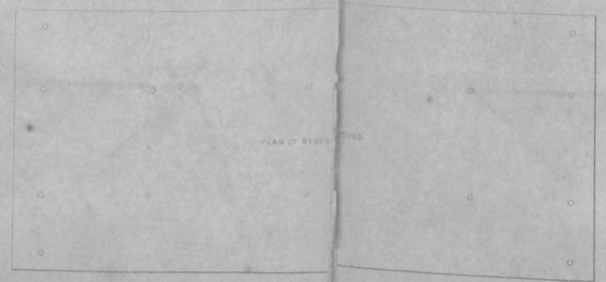





CROSS SECTION OF JAIL LATRINE

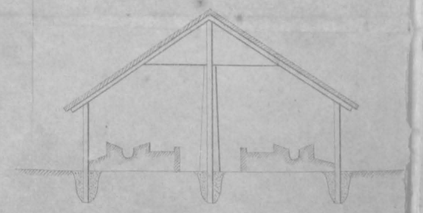


PLAN OF JAIL LATRINE

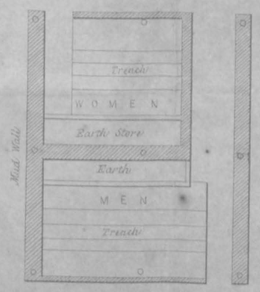



PLAN OF COOK ROOM





CROSS SECTION OF HOSPITAL SHED

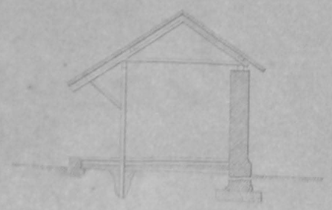


BACK ELEVATION OF HOSPITAL SHED

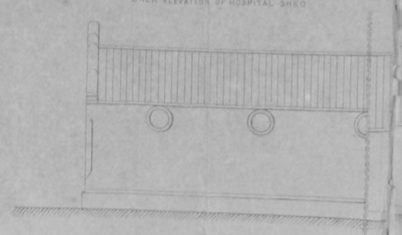


FRONT ELEVATION OF HOSPITAL SHED

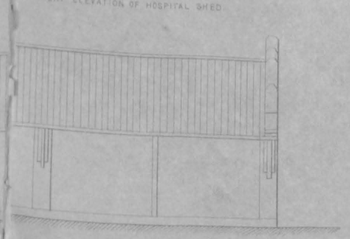


END ELEVATION OF PUBLIC LATRINE

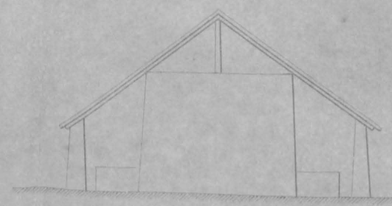

SIDE ELEVATION OF PUBLIC LATRINE

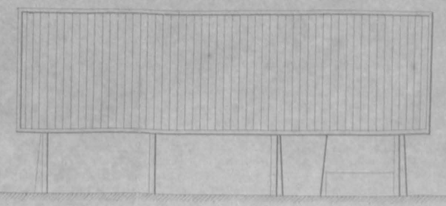


END ELEVATION OF HOSPITAL SHED

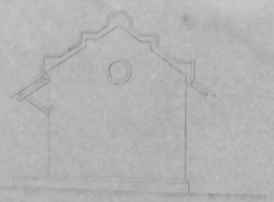


PLAN OF HOSPITAL SHED

Burnt brick in mud cement

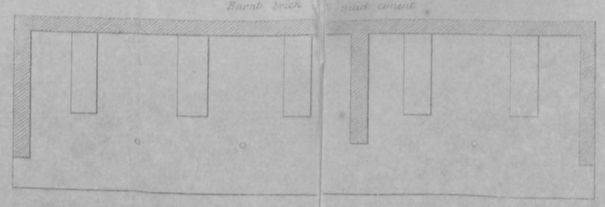


CROSS SECTION OF PUBLIC LATRINE

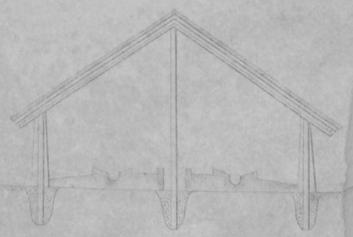

PLAN OF PUBLIC LATRINE

Mud Wall

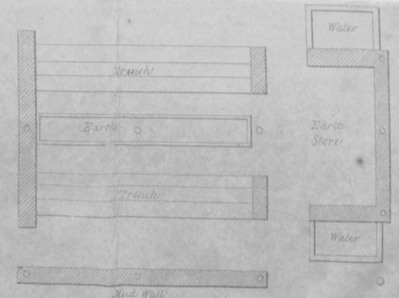


NOTE The latrines and Cook Sheds will be built with mud walling

Approximate Estimates

| | |
|---|---|
| Ryots Shed Rupees | 825 |
| Hospital Shed | 300 |
| Jail Latrine | 350 |
| Public Latrine | 850 |
| Cook Shed | 200 |

Govt Central Press Fort St George
Madras November 1867

SCALE 8 FEET = 1 INCH

0 5 10 20 30 ft

DRAWN BY H.R. HAYDEN AND T.THIAGARAYA RAO LITH BY K.U. BALDEV

[True Copy]


Francis S. A. Cox Colonel
Secretary to Government

# TALUQ CUTCHERRY AND SUBSIDIARY JAIL.

DETAILS OF ROOFING _ VERANDAHS.

DRAWING No. 5



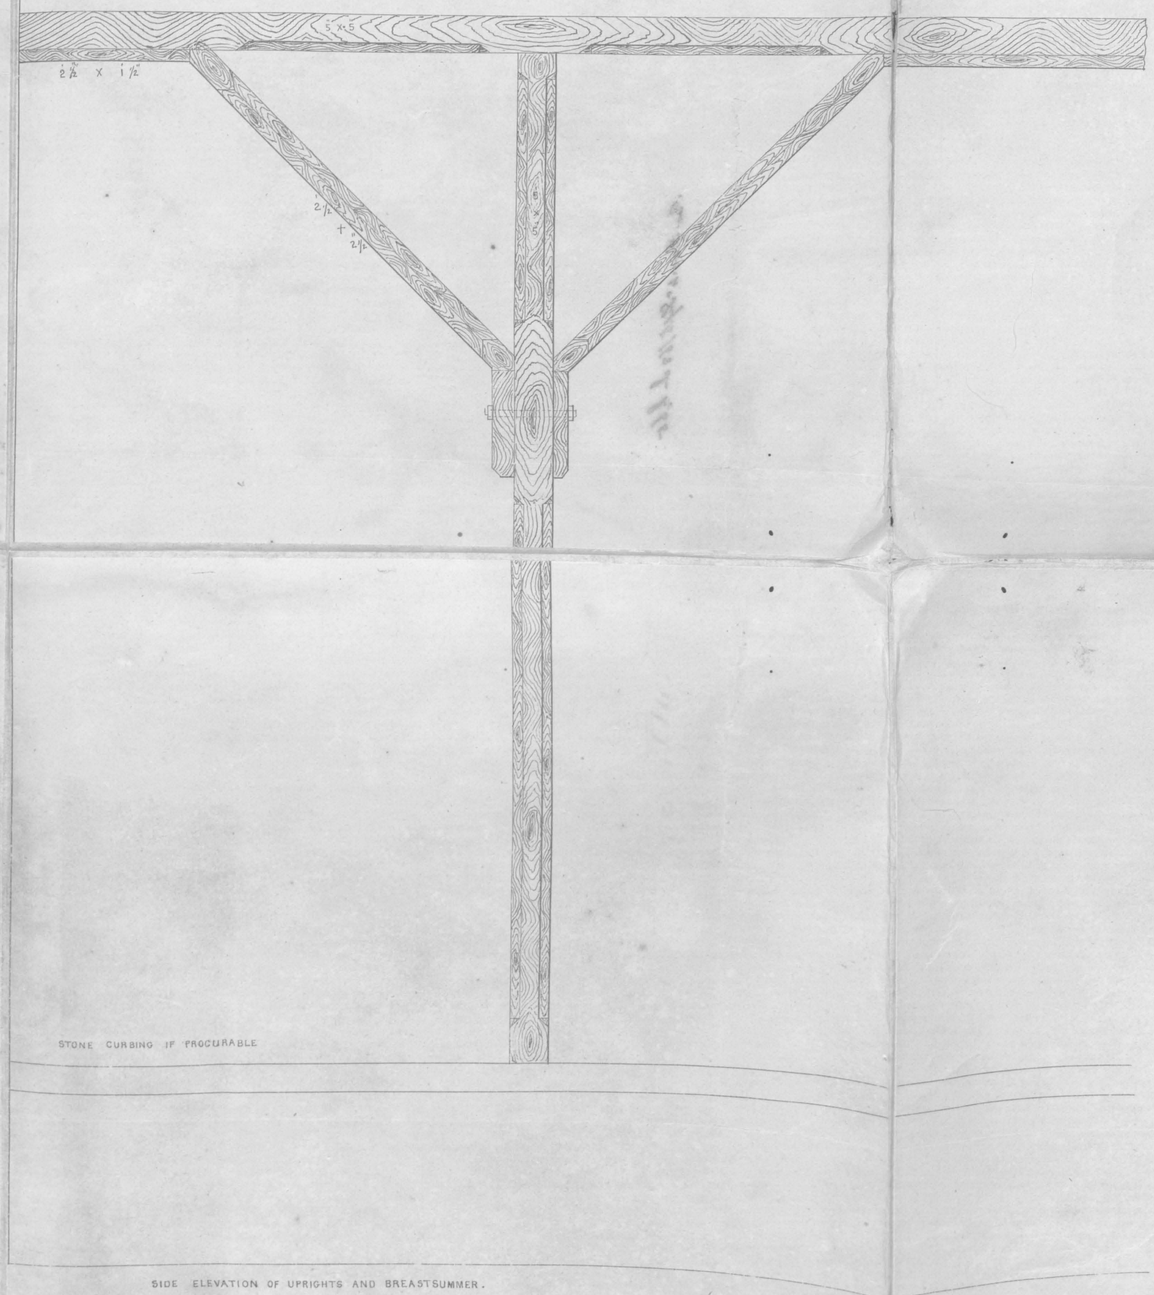




SIDE ELEVATION OF UPRIGHTS AND BREASTSUMMER.


(True Copy)

# TALUQ CUTCHERY AND SUBSIDIARY JAIL.

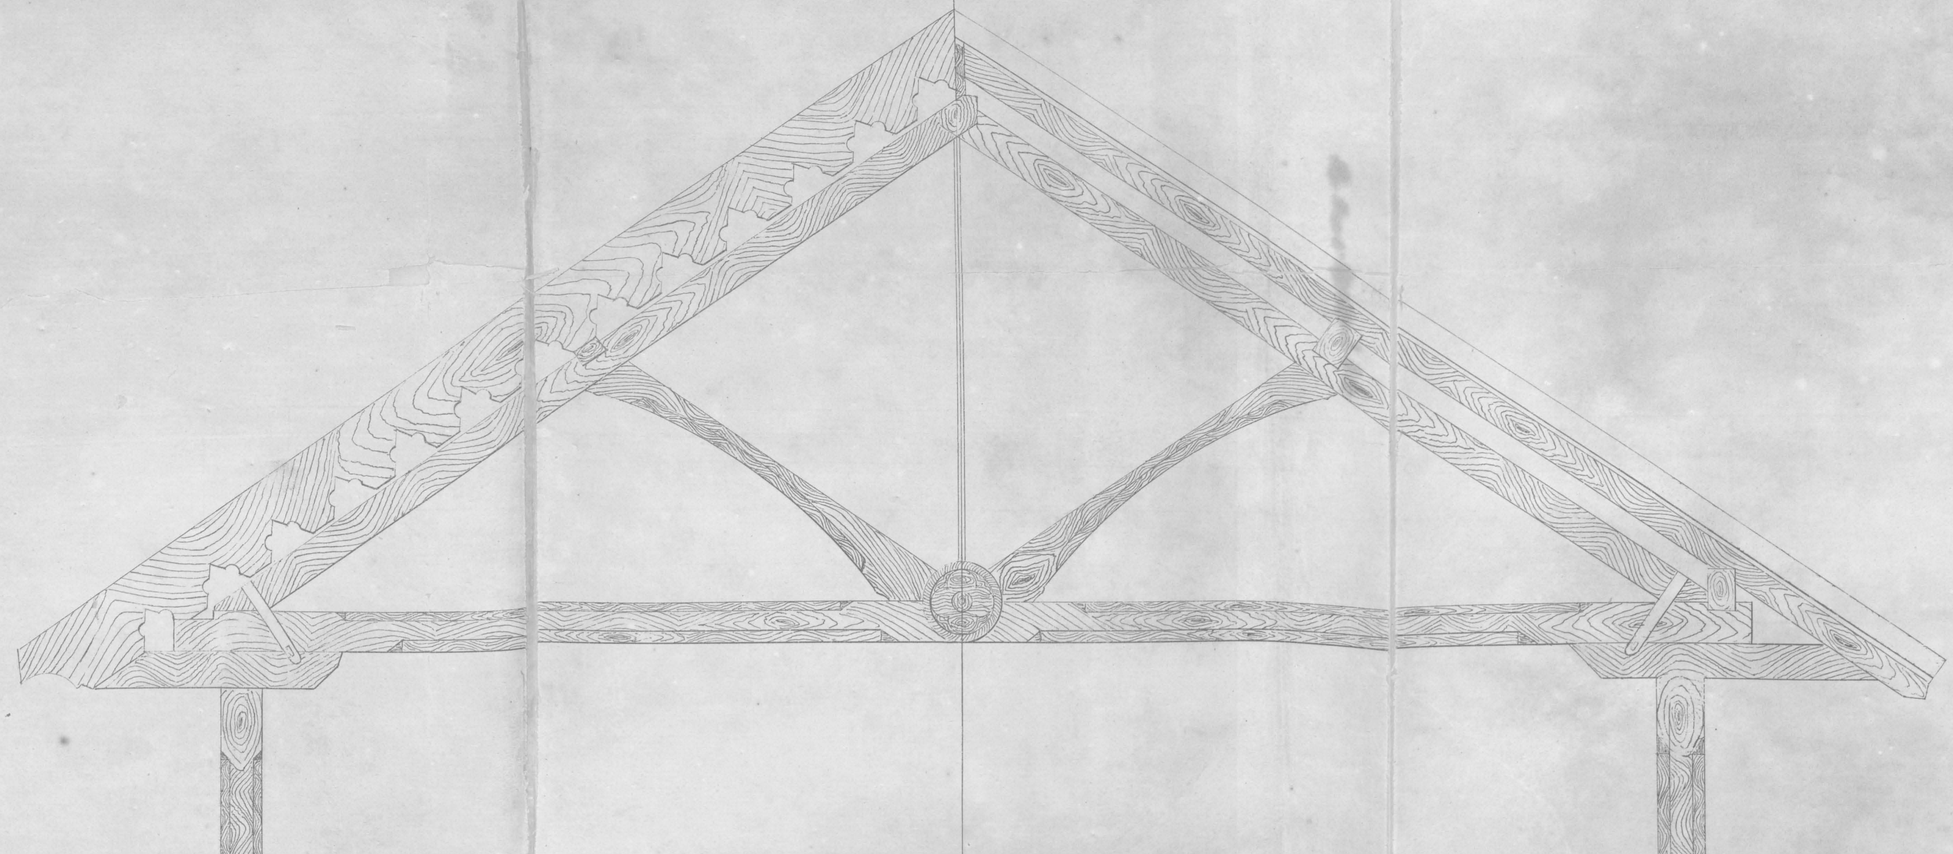
DRAWING. N° 6.




ELEVATION OF TRUSS NEAR TREASURY.

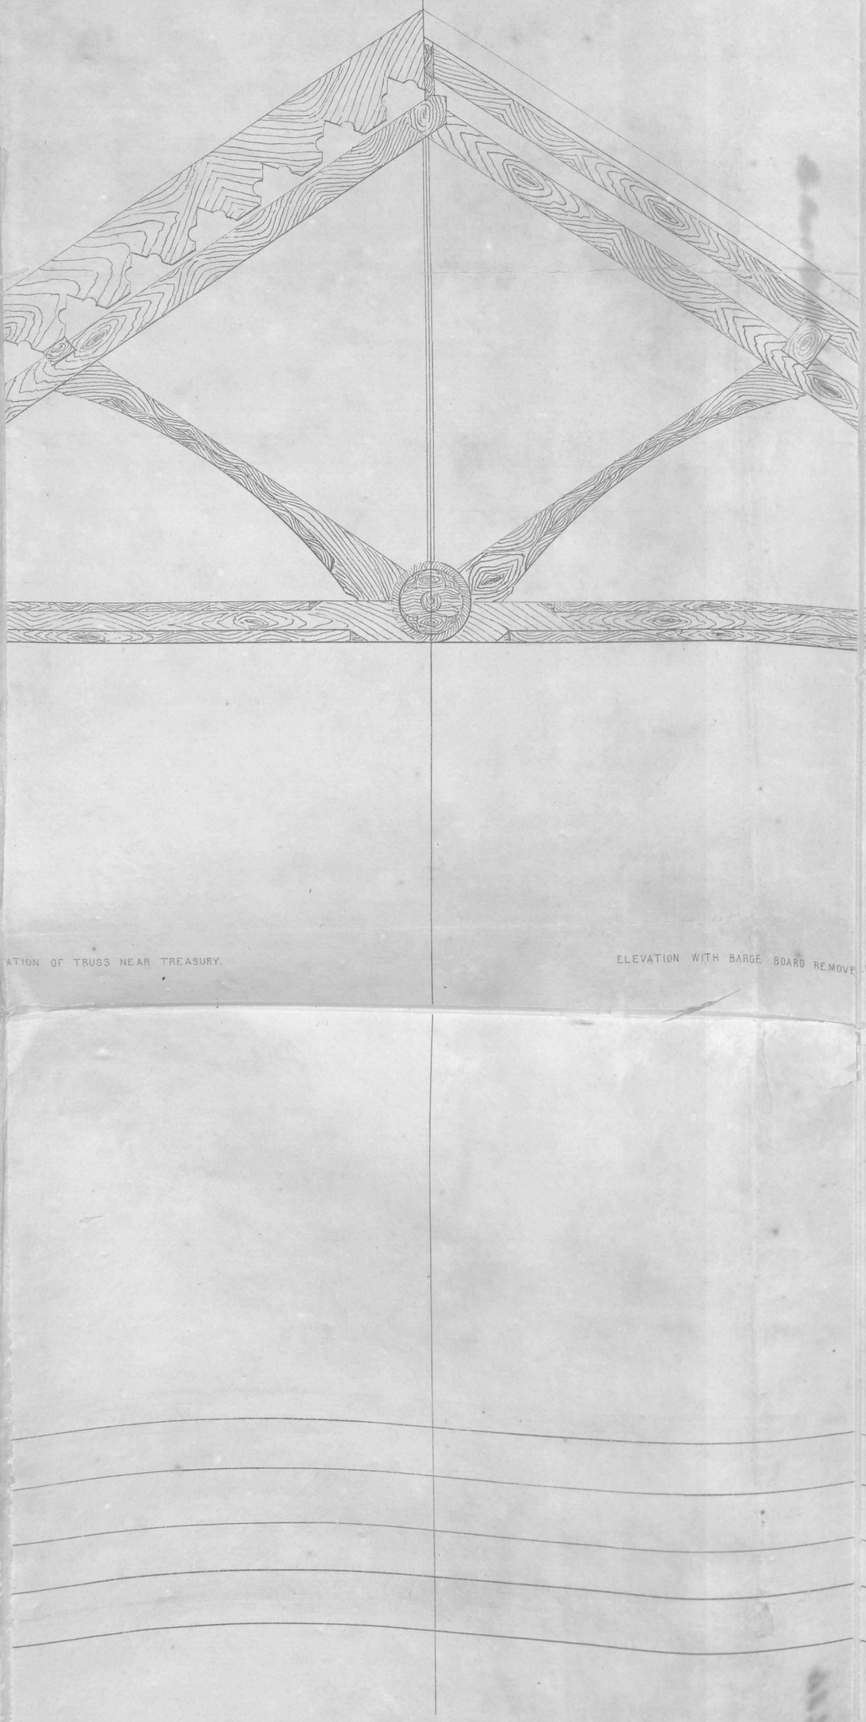

ELEVATION WITH BARGE BOARD REMOVED.

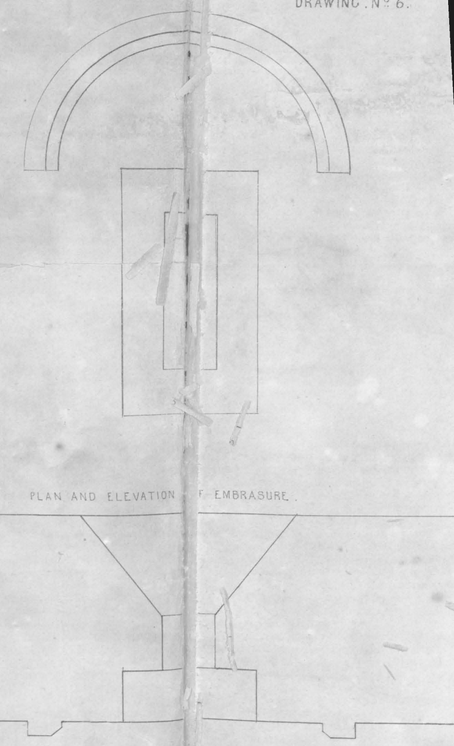


PLAN AND ELEVATION OF EMBRASURE.

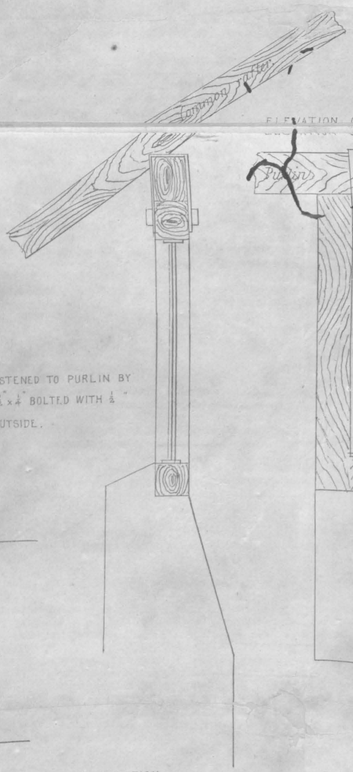

TOP OF FRAME FASTENED TO PURLIN BY 2 IRON STRAPS 1½ x ¼ BOLTED WITH ¼ BOLTS ON THE OUTSIDE.

SECTION.

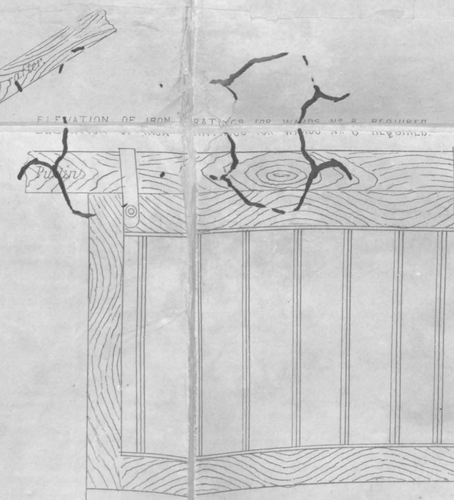

ELEVATION OF IRON RAILING FOR WORK NO 8 REQUIRED

SCALE ONE FOOT TO AN INCH.

/Signed/ R. Chisholm. Architect.

/True Copy/

/Signed/ H. S. Boldrey


Superintendent and Manager.

Government Lithographic Press D. P. W.

Fort St. George, Madras Sept. 1868.


# TALUQ CUTCHERRY AND SUBSIDIARY JAIL.


DRAWING Nº 7.

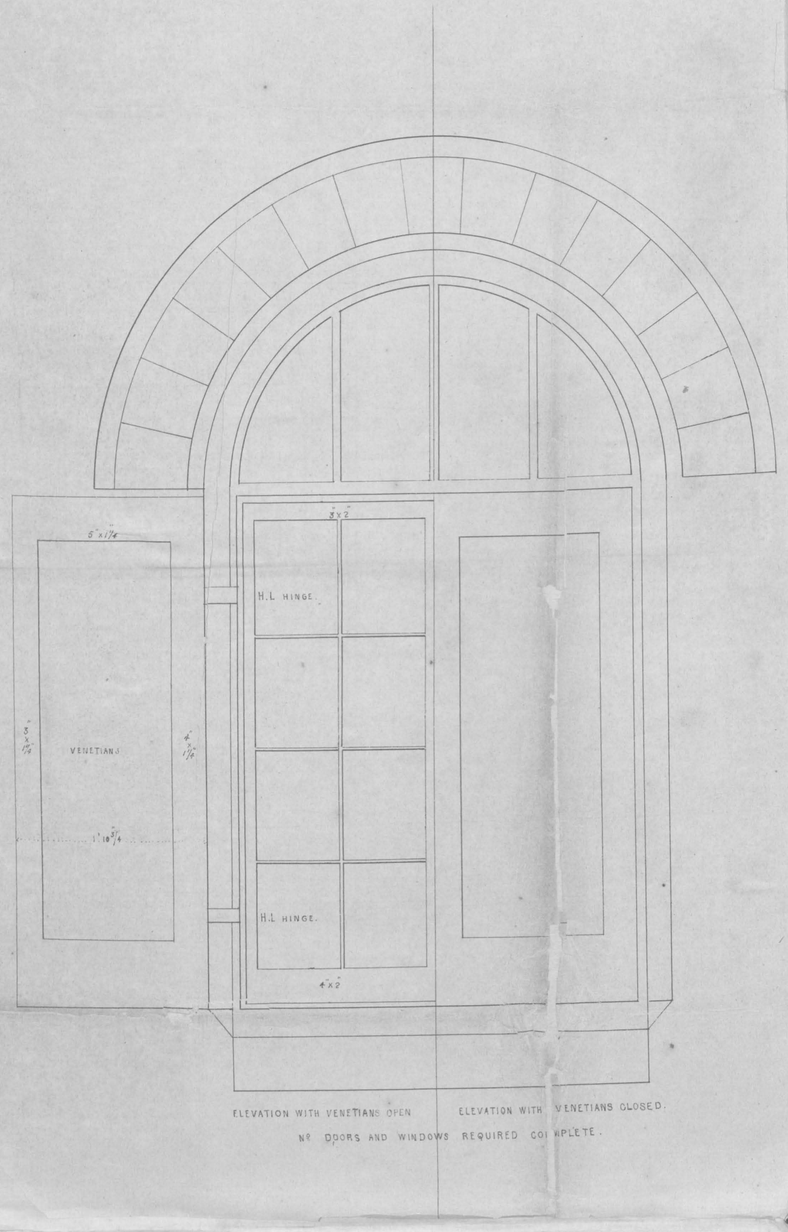



ELEVATION WITH VENETIANS OPEN. ELEVATION WITH VENETIANS CLOSED.

Nº DOORS AND WINDOWS REQUIRED COMPLETE.

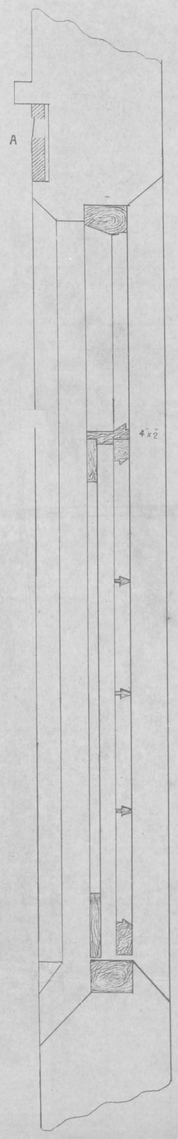

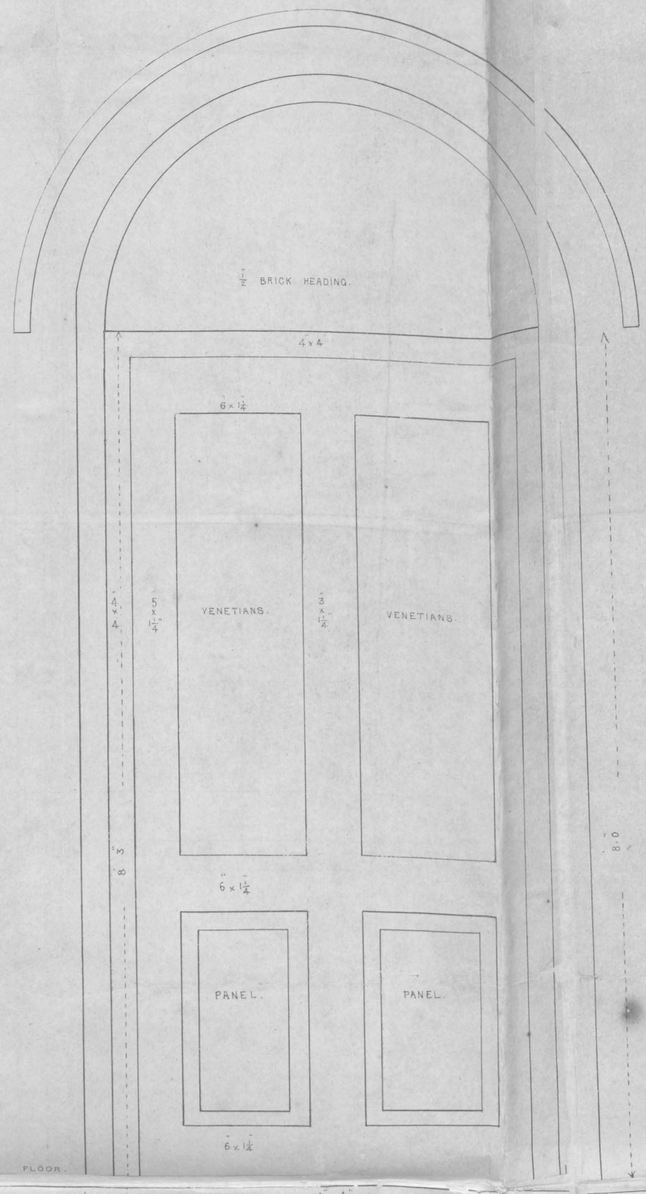

Nº 26 DOORS REQUIRED.

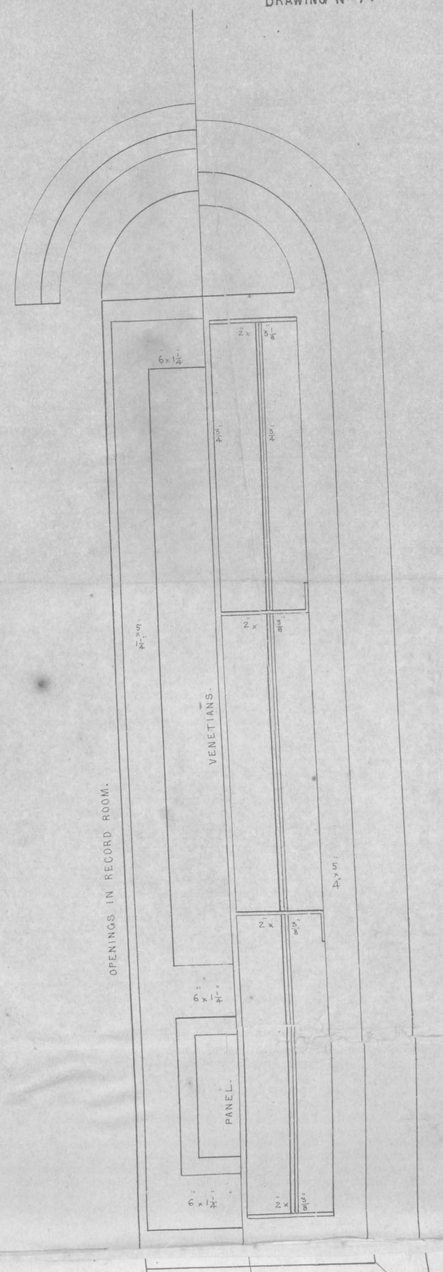




EXTERNAL ELEVATION. INTERNAL ELEVATION.

Nº 14 REQUIRED.

NOTE. IT IS INTENDED THAT THE SPACE A SHOULD BE FILLED IN WITH RED AND WHITE TILES ALTERNATELY SET, IN THE BRICKWORK. IF THESE ARE DIFFICULT TO PROCURE COLORED CHUNAM WILL ANSWER THE PURPOSE.

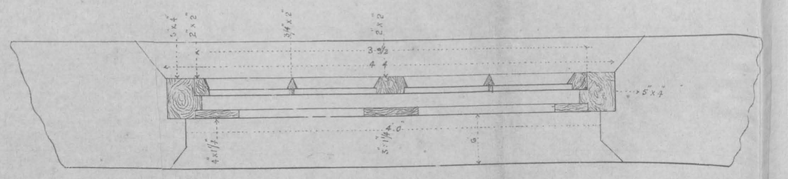

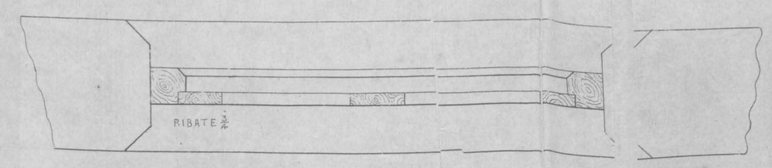W.J. Baldrey

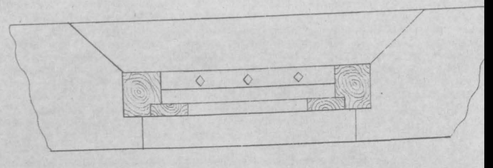*Superintendent and Manager.*

*Govt Litho Press Fort St George Madras. September 1868.*

SCALE. 1. FOOT TO AN INCH.

DRAWN BY C. SARAVANAVALOO AND P. SINGARAVALOO AND LITHº BY R.J. BALDREY.

*(Signed)* R. Ashelon. Actg


*True Copy.*

Col

Secretary to Governm


# DETAILS OF DOORS AND OPENINGS.

DRAWING Nº 8

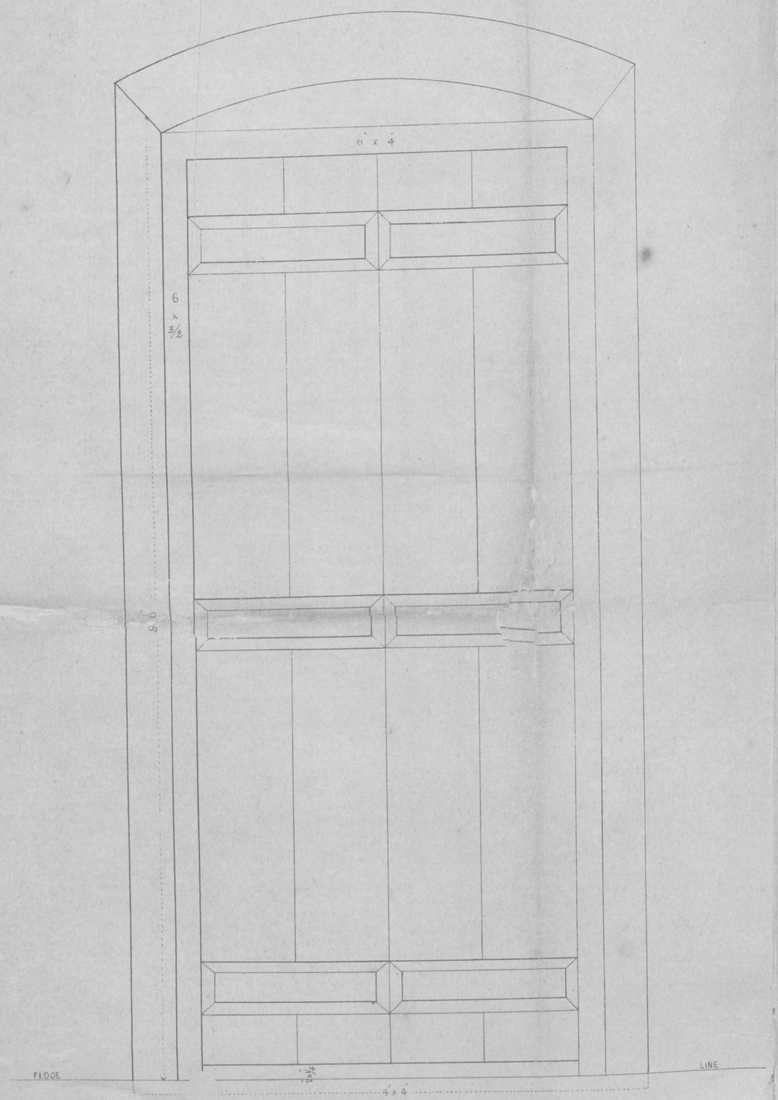



ELEVATION OF BATTEN DOOR

TREASURY

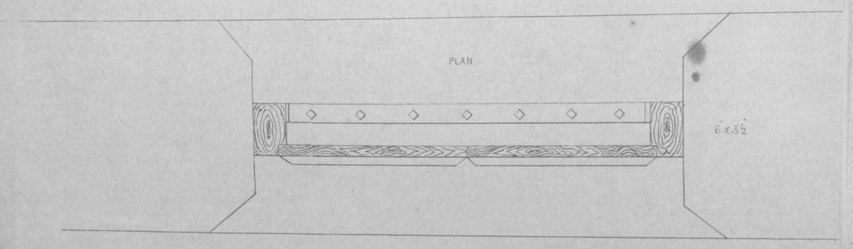



Nº 7 REQUIRED

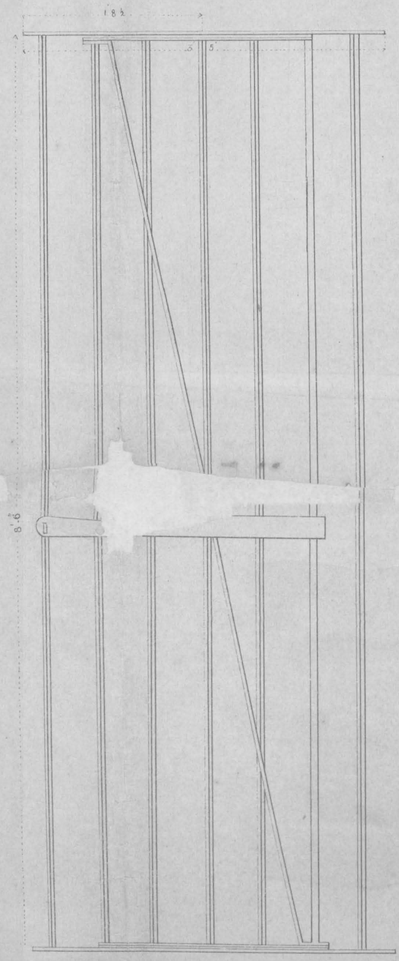


IRON DOOR

Nº 11 REQUIRED

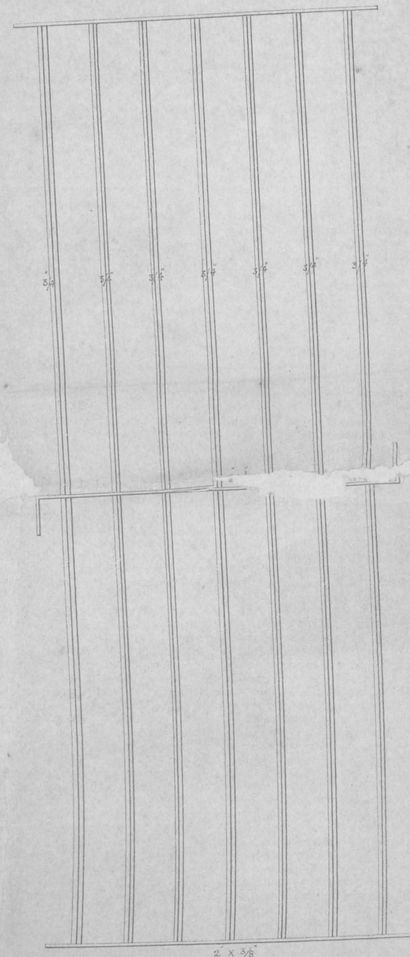


FIXED IRON GRATING

Nº 3 REQUIRED

NOTE. WHEN IRON GRATINGS ONLY ARE REQUIRED THE SCANTLING OF THE FRAME SHOULD BE 4 " 3½

NOTE. THE TWO CLEARSTORY LIGHTS IN THE TREASURY WILL BE IN ALL RESPECTS SIMILAR TO THE TREASURY DOOR ONLY MEASURING 6 " INSTEAD OF 9 " 4" AND WILL BE FITTED WITH IRON GRATINGS 3 " 3 " 2 " 4

(Signed) R. Chisholm, Arct.

DRAWN BY M. JACOB AND LITHº BY R. J. BALDREY.

Wm. H. Baldrey
Superintendent and Manager.

Govt Lithº Press, Fort St George.
Madras September 1868.

Colonel R. E
Secretary to Government P.W.D.