

11120
Public Works (1896) Department.

G.O., No. 1042.

DATED 8 December

[Despatch Abstract.]

Molakalapundla Tank. Revised Estimate
of Rs. 2810 for improvements to — in
the Nellore Dⁿ sanctioned.

T.C.
S/12.

[]

9/12

GOVERNMENT OF MADRAS.
PUBLIC WORKS DEPARTMENT.

Irrigation.
Account.

Read—the following paper:—

From Major W. L. C. BADDELEY, R.E., Superintending Engineer, II Circle, to the Chief Engineer for Irrigation, dated Bezvada, 16th November 1896, No. 491 N.L.

I have the honour to forward herewith, for your approval and sanction of Government, a comparative statement for Rs. 2,810 for the improvements of Molakalapundala tank in the Nellore division.

2. The original estimate, amounting to Rs. 2,320, was sanctioned by me.
3. The report which accompanies it explains the necessity for the revision of the estimate.

ENCLOSURE.

Report to accompany the revised estimate for the Molakalapundala tank improvements, II Circle.

Amount of original estimate	...	...	...	...	...	...	Rs.
" revised	...	...	...	...	...	...	2,320
	...	...	...	...	...	...	2,810

[Original sanction S.E. II Circle, Reg. No. 113 of 1895-96.]

The chief additions in the revised estimate are due (1) provision of a surplus channel, as the surplus water at present runs along the toe of the bund and erodes it, (2) to revetment for bund across breach, which was not originally provided for, and (3) to the fact that hard gravel and soft rock was met with in the foundation work for which a higher rate than the one in the estimate is necessary. The reasons for the other alterations are stated in the comparative statement.

19th October 1896.

(Signed) R. N. H. REID,
Executive Engineer, Nellore Division.

ORDER—No. 1042 I., dated 8th December 1896.

The following revised estimate is sanctioned in supersession of the estimate of Rs. 2,320 sanctioned by the Superintending Engineer, II Circle:—

Irrigation
43. Minor Works and Navigation
Minor Works for which neither Capital nor Revenue Accounts are kept, P.W.D.
Original Works.
Improvements to Molakalapundala tank, No. 185 of list of works in the Nellore division, appended to G.O., No. 407 I., dated 6th July 1897.

Estimate	...	...	...	...	...	...	Rs.
2. This sanction is registered as No. 144 I. of 1896-97.	...	...	...	...	...	...	2,810

(True Extract.)

Under Secretary to Government,
Irrigation Branch.

To the Chief Engineer for Irrigation.

" Superintending Engineer, II Circle, with three enclosures.
" Examiner, Public Works Accounts.

Ed. C. M. Thambaswamy.

PROCEEDINGS OF THE MADRAS GOVERNMENT.

Under date the

From Supg Eng. II Circle, No. 491 N.L. of 16 Nov 96

Read the following

The following revised estimate is sanctioned in supersession of the estimate of Rs. 2,320 sanctioned by the Supg Eng. II Circle:—

Irrigation
43. Minor works, namely
Minor works for which neither Capital nor Revenue Accounts are kept, P.W.D.

Original works.
Improvements to Molakalapundala tank, No. 185 of list of works in the Nellore division, appended to G.O. No. 407 I., of 6th July 1897.
Estimate Rs. 2,810
2. This sanction is registered as No. 144 I. of 1896-97.

To the Chief Eng for Irrigation
Supg Eng II with 3 encls.
Ed. C. M. Thambaswamy

10/12/96

W.H.
27/11

C.E.J.
11-11-96

Public Works (1896) Department.

CURRENT No. 11120

R 9522

Order

From Major W. L. C. Bassett,
R.E.
Superintendent
" Civil.

No. 1191 M

Dated 16 November 1896

Received 18.11.96
8.12.96
Enclosures (1 blank)

Spare copies

SUBJECT.

Holokapinala a
Lords - Forwards etc -
made for - for sanction.


18.11.96

18.11.96

G.O.	No.	Department.	Date.

[illegible]

Your most obed^t serv^t
Wm Barry Major &c
 Secy: Genl to Govt

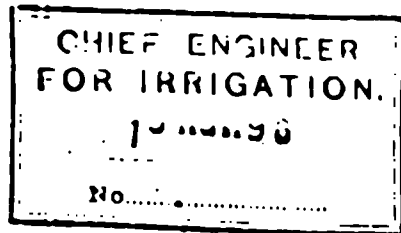

From,

The Superintending Engineer,
H Circle.

To,

The

Dated

Received

} 18

Enclosures.

NO.

SUBJECT.

P.W.D. . . . Second Circle.

Revised estimate for the Abolakula
-pundla Can. Improvements

Amount of original estimate Rs. 2520/-

Amount of Revised estimate Rs. 2810/-

Original Section & E. Report. 113
18 95-96

Report.

To accompany the revised estimate for the

The Chief additions in the revised estimate are due (1) provision of a Surplus Channel, as the Surplus water at present runs along the toe of the bund and crosses it (2) to payment for bund across breach, which was not originally provided for and (3) to the fact that hard gravel and soft rock was met with in the foundation work for which a higher rate than the one in the estimate is necessary. The reasons for the other alterations are stated in the Comparative Statement.

R. H. H. Reed
19/10.

Ex. Engineer
C. D. D.

*Ref
his*

CASE NO. 1-100000
FOR INVESTIGATION
9-1-60

Page 3
6/15/60