M.R.O. 14—18,000—57-6-24

MADRAS RECORD OFFICE.

Government of Madras.

Revenue **DEPARTMENT.**

G.O. No. 126 Press Mis

2553. 256

Dated 15—1—1867

Not to be folded or roughly handled

Proceedings of the Madras Government, Revenue Department, 15th January 1867.

No. 255. Read the following Proceedings of the Board of Revenue, dated 5th April 1866.

Read the following letter from the Collector of Madras, to the Secretary to the Board of Revenue, dated Saidapett, 28th March 1866, No. 176:—

The Government, in their Proceedings of 8th September 1865, Revenue Department, sanctioned a plan and estimate for Rupees 800, for the construction of a latrine at my Cutchcherry, and in their Order of 14th idem, No. 2,698, Public Works Department, they directed the cost of the work to be charged against the Reserve "Civil Buildings." Captain Rogers, the Mount Range Engineer, has now however, at my suggestion, somewhat altered the original plan, both for the purpose of securing privacy and reducing the size of the building. The amount of estimate has, therefore, been also altered and reduced to 600 Rupees. As the official year is fast coming to a close, I have, in anticipation of the sanction of Government for the alterations, instructed Captain Rogers to commence the work at once, and request that the plan and estimate may be returned as early as possible with the approval of Government.

Submitted for the approval of Government.

No. 256. ORDER THEREON, 15th January 1867, No. 126.

Separate Revenue, No. 13.
Salt.

Approved.

(True Extract.)

(Signed) J. D. SIM,
Secretary to Government.

To the Board of Revenue.
„ the Public Works Department.

Exd. S. T. Augustin.


Su Us 2021 Ks 11




Rec = 978/68

Pres. 15 Janry. 167 [illegible] 255.


Cross Section on Line AB

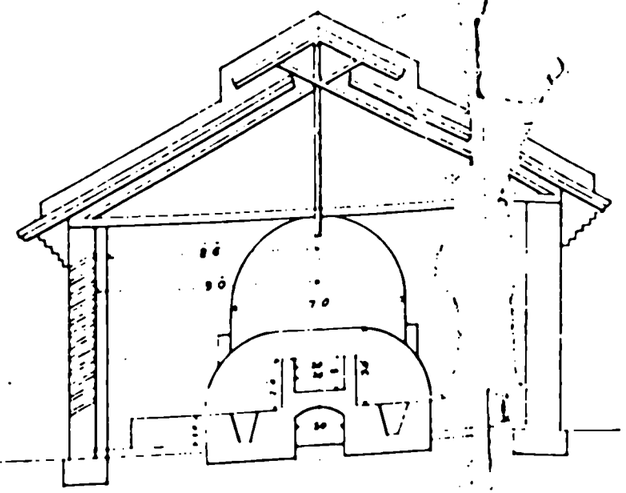


ELEVATION

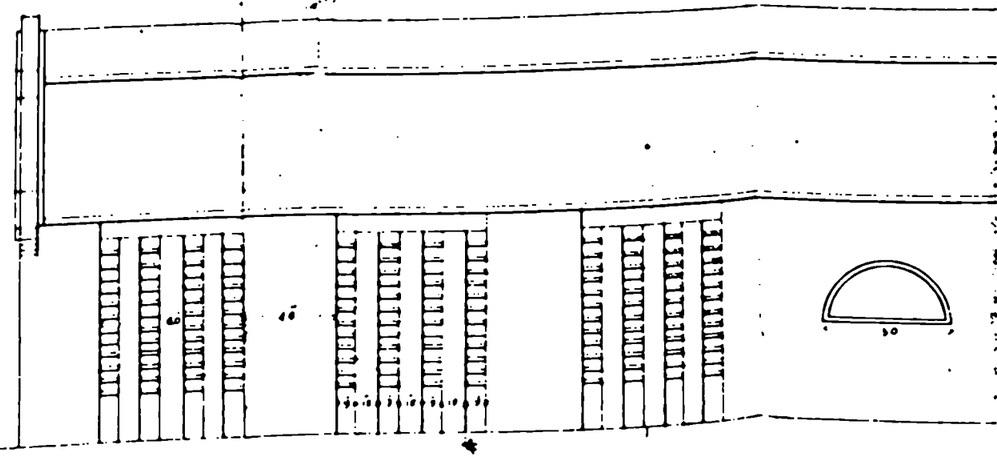


Details of Tiling

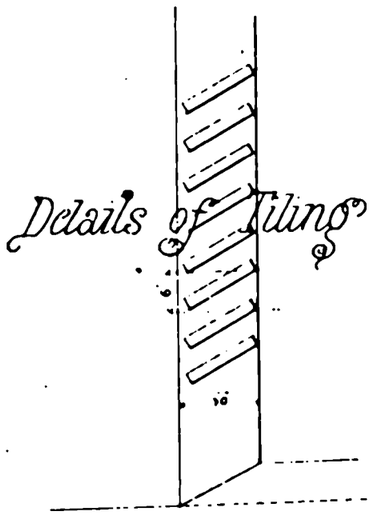

PLAN

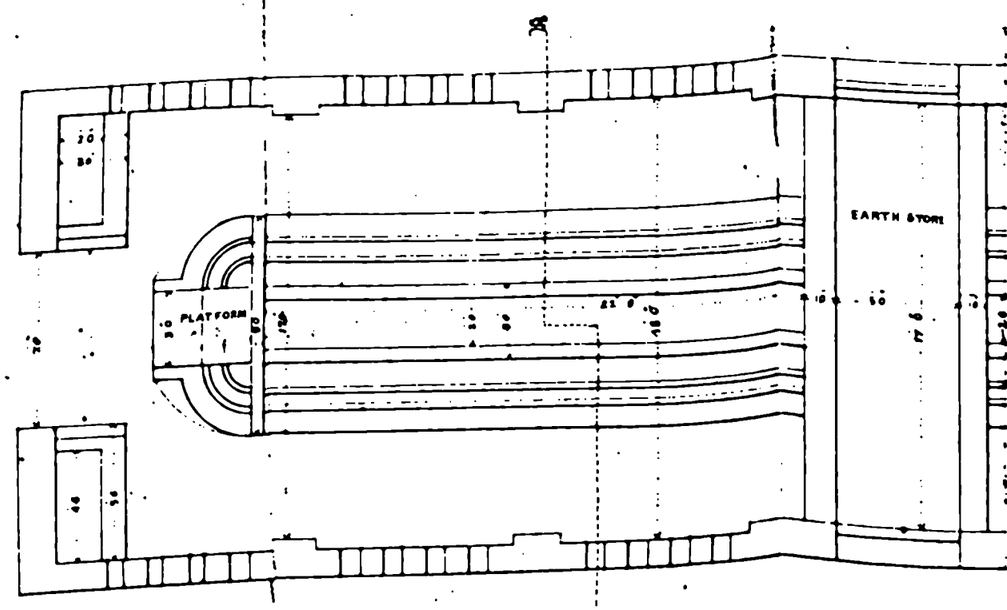

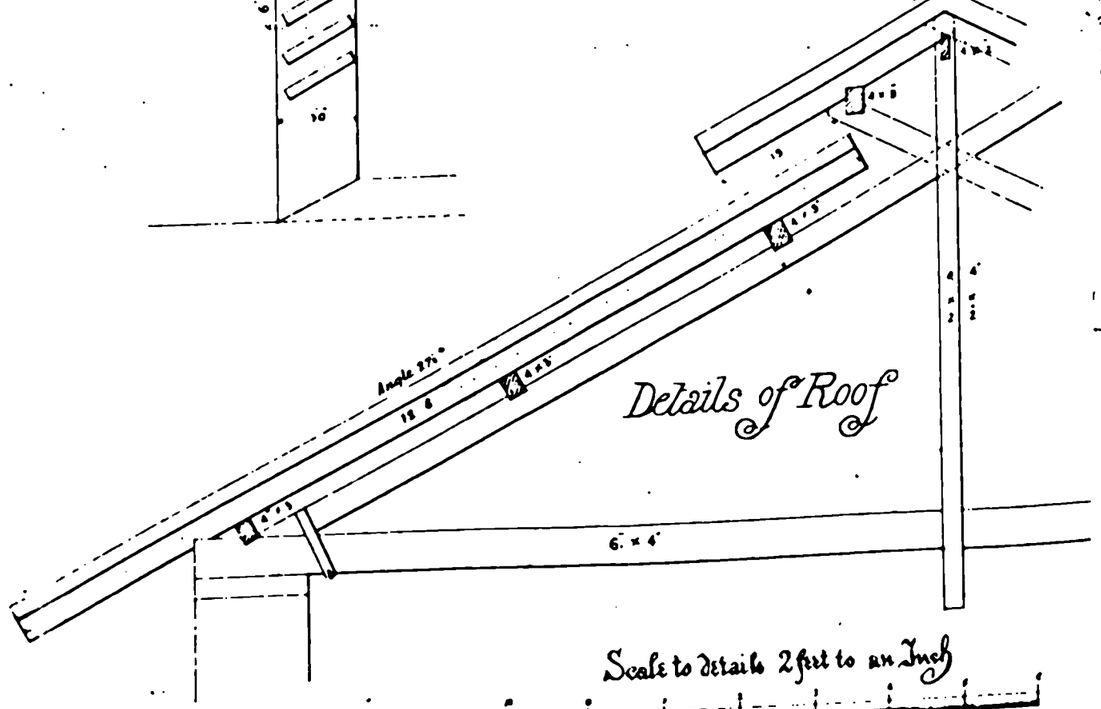

Details of Roof

Scale to details 2 feet to an Inch

Scale to Plan Elevation and Section 6 feet to an Inch

Detailed Estimate No. of 1865/66

Work. District Madras Taluq Saidapet Village Saidapet—
Constructing Latrine in the compound of the
Collectors office at Hoines' Gardon.

Particulars	Nr	measurement L	B	D or H	Contents
Brick work in mud					
Foundation					
Side walls	2	25—	1-9	2-6	218-9
End —— Do:	2	19-9	1-9	2-6	172 9¾
Centre Pillar	1	2—	2—	3—	12—
Long walls to dry earth store	2	21-6	1-3	1—	53-9
—— Do: —— to Privy seats	2	21-6	1—	1—	43—
—— Do: —— to Do: —— outside	2	23-6	1—	1—	47—
Sides to Privy seats	"4	21-6	"-9	2-3	145-1½
Floor to —— Do:	2	21-6	1—	"-6	21-6
Sides to Do: outside	4	23-3	"-9	1-3	87-2¼
Floor to —— Do:	2	23-3	1—	"-6	23-3
Brickwork below granite steps	24	"-9	"-9	"-6	6-9
Superstructure					
Side walls	2	24-9	1-6	8-6	631-1½
End —— Do:	2	20—	1-6	9—	540—
—— Do: —— Gables	2	20—	1-6	3-6	210—
Centre Pillar	1	1-6	1-6	14-9	33-2¼
Long walls to dry earth store	2	21-9	1—	3—	130-6
—— Do: —— to Privy seats	2	21-9	"-9	3—	97-10½
—— Do: —— Do: —— outside	2	23-3	"-9	3—	104-7½
Partitions to Privy & drain seats	24	3—	"-9	3-3	175-6
Cubic feet					2754
Deduct as below mentioned C. ft.					445
Remaining Cub feet of brick in mud. or					2309
Cubic yards					85 14/27

Deductions

Arched openings to end walls	4	3-6	1-6 5-0	105-0
Do over springing	4	$3\frac{1}{2}^2 \times .7854 \times \frac{1}{2}$	1-6	28-6
Openings to side walls	12	2-0	1-6 3-0	108-0
Do over springing	12	$2^2 \times .7854 \times \frac{1}{2}$	1-6	27-0
Archwork				176-7½
Total Cubic feet of deduction				445-1½

Archwork.

Over Entrance	4	7-9	1-6 1-6	69-9
Do over openings to side walls	12	4-3	1-6 0-9	57-4½
Small arches to Privy Seat openings in the End walls	4	2-9	1-6 0-9	12-4½
Do over openings to Partitions	24	2-9	0-9 0-9	37-1½
Total C.ft. of archwork or				176-7½
Cubic Yards				$6\frac{14.2\frac{1}{2}}{27}$
Plastering with clay Squares				28
Granites to floor	48	3-0	1-0 0-4	48
Do blocks to Steps	48	0-9	0-9 1-0	27
Total C.ft. of Granite				75
Asphalting the sides and bottom of the Privy seats	2	24-9	5-0 "	247-6
Do Do of the Drains	2	23.3	3-0 "	139-6
Sof of Long & Cross walls of Privy Seat		162-0	1-6 "	243
Total Square feet or				630
Squares				6
Roofing with Palmirah rafters reepers and thatches	1	25-0	30-0 "	750
Wood work. Ridge Pole	1	24-0	0-9 " 6	9
Filling with Honey comb work in the openings to side walls	12	2-0	3-0	72
Do over Springing	12	$2^2 \times .7854 \times \frac{1}{2}$		18
Total Square feet of Honey comb work				90

Abstract

Quantity	Description of charges	Rate Per	Amount	Total
86	C.yds of Brickwork in mud @	2 8-0 C.yd	215	
7	" of Archwork in chunam @	6-0-0	42	
28	Sqrs of Plastering with clay	0 6 Sqr	11	
75	C.ft of Granite	1 12 C.ft	56	
6	Sqrs of Asphalte plastic	7 8 Sqr	105	
8	Roofing with Palmirah couples reepers & Thatches	14-0-0 "	112	
		3-0-0 C.ft	27	
9	C.ft of Teak wood @	5-0-0 Sqr	5	
1	Square Honey Comb work @		4	
	Excavation		23	
	Sundries			
	Total Estimate Rupees		600	

No II or
Mount Range office
7th March 1866

Captain RE
Ex. Engineer Mount Range

Specification

Relative to the Collectors Cutchery

The Building to have the arrange=
ment and dimentions shewn in the accom=
panying Plan and Estimate.

Walls to be built of Brick in mud
and plastered in and outside with clay.


The roof to be of Palmirah rafters
reepers and thatches.

Sides of Privy treds and drain to
be floored with Granite.

Blocks of Granite each 1'x9"x9"-em=
=bedded on layers of brick in asphalte
are provided for stepping over the Partitions

Surface and sides at top of the long
and Partition walls of the Privy are in
plastered with asphalte to keep the walls
safe

A. W. Rogers Captain R.E
Ex. Engineer Mount Range

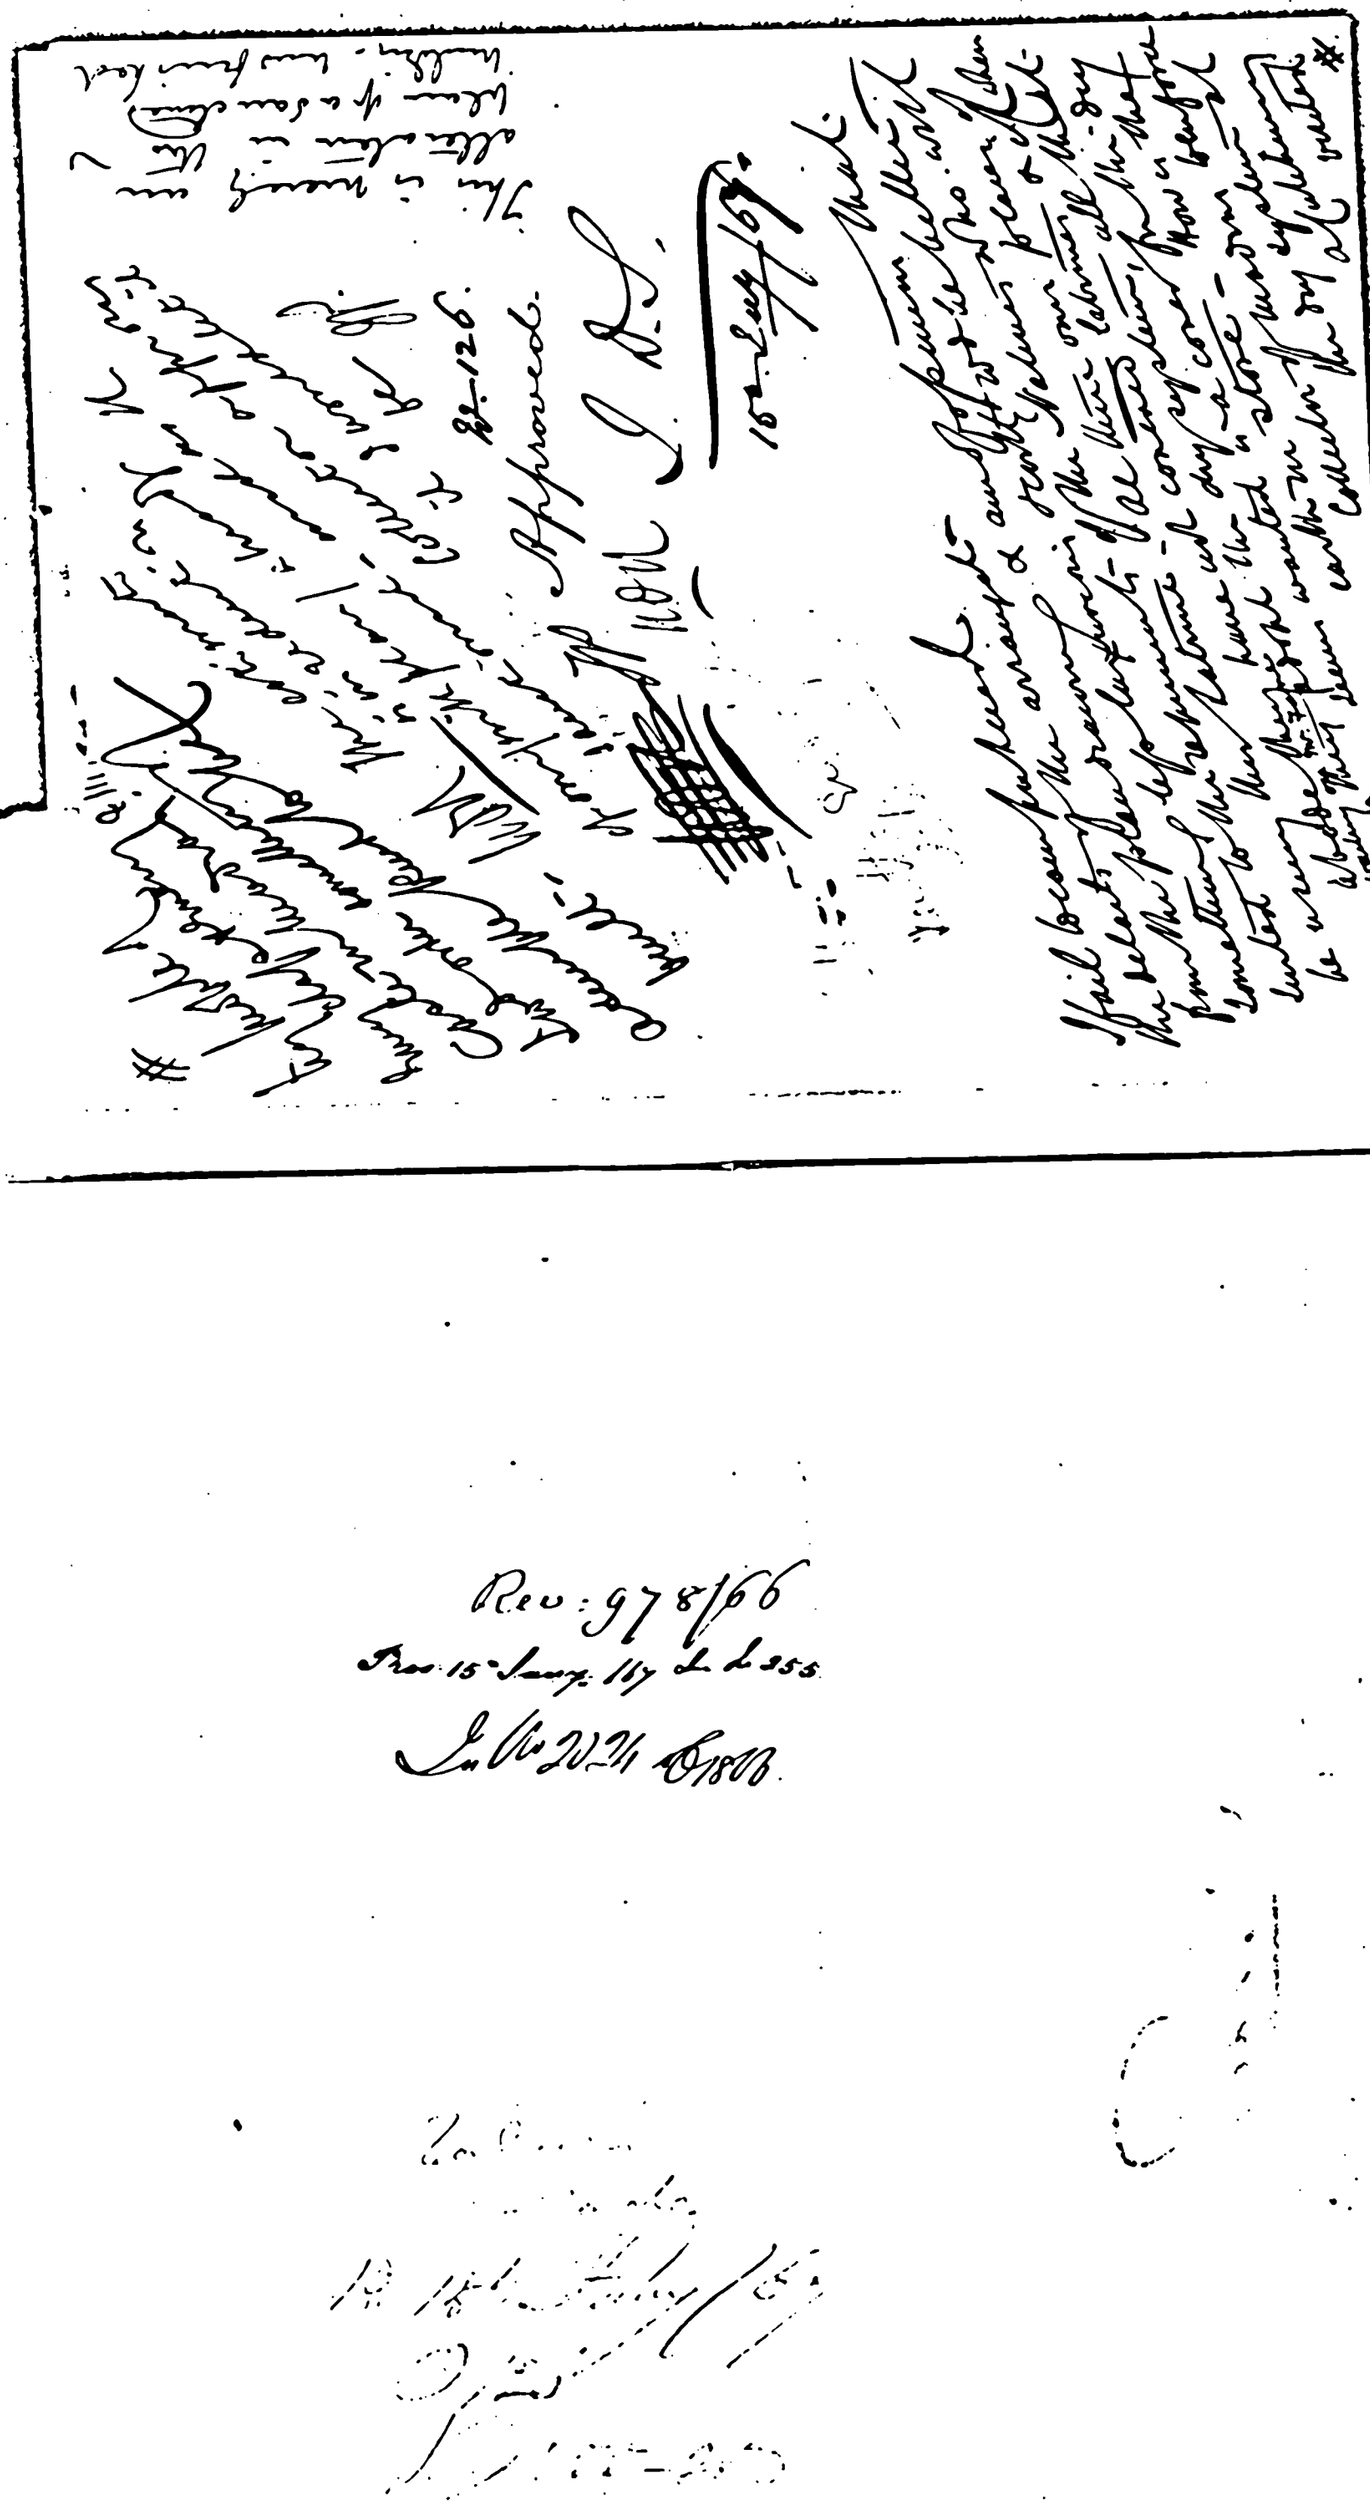

Rec: 9/8/66
Fee 15 Stamp 1/7 L.L. 255
Ln No 2021 & 1806

Pros Sept 1865-A176-7
19 —— 084-2

Rep:- 1866- Depart E
No of Para 1915 January 9765

Proceedings of the
Board of Revenue

Dated 5÷
Desp. 5e } April 1866.
Rec. 6e
E.2.0k

Submitting to Govt for approval, letter from Collector of Madura requesting sanction for altered Plan & Estimate for construction of a Latrine at his Cutchery-

No 26. 15 Lacs.

With a/order

No 255 & 256

14 Plans & Estimates Returned

Ch Apply 66 R14

Copy

Collector of Madura's letter dated 5th April 1866 No 255

Referring to the Board's Proceedings of 19th January 1865 No 9765 sanctioning the construction of a Latrine at the Cutchery at a cost of Rupees fifteen thousand five hundred, I have the honor to submit for the approval of the Board the accompanying Plan & Estimate for the construction of a Latrine at the Cutchery at a cost of Rupees sixteen thousand five hundred, the Plan & Estimate sanctioned by the Board having been found insufficient for the purpose intended.

2. The Plan & Estimate now submitted have been prepared by Mr Rollo, Executive Engineer and in communication with the Superintending Surgeon. The Plan is drawn to a scale of 8 feet to an inch and the dry earth system is proposed to be adopted. The Plan & Estimate have been examined by the Civil Engineer and the Superintending Surgeon and I am directed to say that they are considered to be suitable for the purpose intended.

I have &c