

Government of Madras

HOME DEPARTMENT, (EDUCATION)

G.O. No. 115, 1st February 1918

Building grant

Sanctioning a — of Rs. 6,200 towards the cost of adding an upper storey over a portion of the Hindu High School building at Srivilliputtur, Ramnad district.

INDEXED

ORIGINAL

Government of Madras

HOME DEPARTMENT (EDUCATION)

G.O. No. 115, 1st February 1918

Building grant

Sanctioning a — of Rs. 6,200 towards the cost of adding an upper storey over a portion of the Hindu High School building at Srivilliputtur, Ramnad district.

READ—the following papers :—

I

Letter—from the Hon'ble Mr. J. H. STONE, M.A., F.R.H.S., C.I.E., Director of Public Instruction.

To—the Secretary to Government, Home (Education) Department.

Dated—the 9th February 1917.

No.—Ref. on Cur. 435.

The present accommodation of the Hindu High School, Srivilliputtur, Ramnad district, is inadequate and the authorities therefore propose to improve it by constructing an upper floor over a portion of the existing building. The District Board Engineer certifies that the foundations are strong enough to bear an upper storey (vide the enclosed certificate). The plans bearing Nos. 198 (A) and 198 (B) with estimates amounting to Rs. 13,500 for the proposed work are herewith submitted. In addition to this estimated cost, the management have paid Rs. 335 for the preparation of plans and estimates. The total cost thus comes to Rs. 13,835 and I have the honour to recommend that a grant not exceeding one-half of this amount may be sanctioned to be paid when funds become available.

II

**Note by the Chief Engineer, Public Works Department, No. 60-D,
dated 1st May 1917.**

The Director of Public Instruction submits two plans bearing D.P.I. Nos. 198 (A) and 198 (B) and a detailed estimate amounting to Rs. 13,500 for adding an upper storey over a portion of the existing Hindu High School building at Srivilliputtur, Ramnad district.

2. The plans and the estimate have been examined in the Chief Engineer's office and it is observed that they contain a number of defects, a few of which are pointed out in the following remarks :—

(1) The sizes of joists and beams supporting the existing roof are not figured on the drawings. This information is necessary for deciding if the existing roof is strong enough for use as a class room floor.

(2) The necessity for providing girders and stanchions in rooms A and B to carry the new upper storey walls is not explained.

(3) Instead of providing a flat terraced roof supported by steel girders over the proposed additional storey a light tiled roof supported by timber trusses is recommended owing to the present excessive cost of girders and the uncertainty and difficulty of securing the required sizes.

(4) It is undesirable to locate the stairs in the small open area as light and ventilation to the various rooms would be interfered with. It is proposed to construct one of the flights in masonry and the remaining portion in timber; access to the various rooms on the first floor is through wooden balconies three feet wide: arrangements quite unsuited to the purposes of a school. A satisfactory method would be to utilize portions of the existing rooms A and B for the staircase and to provide two sets of stairs as shown in green on D.P.I. No. 198 (B). It is considered that this suggestion would not materially exceed the cost.

(5) The size of the bressummers supporting the verandah roof of first floor is, according to section A B on D.P.I. No. 198 (B) 6" x 9", which is unnecessarily heavy.

(6) The rooms D and E are not sufficiently lighted. Some more windows or ventilators may be provided.

3. With these remarks, the plans and the estimate are returned for revision in accordance with the instructions contained in Circular Memorandum No. 116 C, dated 4th January 1913.

S. B. MURRAY,
Chief Engineer, P.W.D.

III

Memorandum No. 676/B-2, Home (Education), dated 7th May 1917.

The plans and estimates for the construction of an upper floor over a portion of the building occupied by the Hindu High School, Srivilliputtūr, Ramnad district, received with the Director of Public Instructions letter R.O.C. No. 435, dated the 9th February 1917, are returned to him for resubmission, after revision in accordance with the Chief Engineer's Note No. 60 D, dated the 1st May 1917 (copy enclosed).

R. RAMACHANDRA RAO,
Secretary to Government.

To the Director of Public Instruction with plans, estimates and copy of Chief Engineer's note.

IV

Letter—from the Hon'ble Mr. J. H. STONE, M.A., F.R.H.S., C.I.E., Director of Public Instruction.

To—the Secretary to Government, Home (Education) Department.

Dated—the 5th October 1917.

No.—R.C. 435.

With reference to your Memorandum No. 676/B-2, dated 7th May 1917, in connexion with the construction of an upper floor over a portion of the building occupied by the Hindu High School, Srivilliputtūr, I have the honour to submit herewith the revised plans and estimates said to have been prepared in accordance with the instructions of the Chief Engineer.

2. The original plans and estimates are also herewith sent.

V

Note by the Chief Engineer, Public Works Department, No. 428-C., dated 19th January 1918.

According to the note by the Chief Engineer, No. 60 D, dated 1st May 1917, the Director of Public Instruction submits two revised drawings and a revised estimate amounting to Rs. 12,800 for a grant-in-aid towards the cost of adding an upper storey over a portion of the existing Hindu High School building at Srivilliputtūr, Ramnad district.

2. The revised drawings and estimate have been scrutinized in the Chief Engineer's office and the sizes of roof timbers altered where necessary. The window openings W W (in the ground floor walls) over which the existing rolled steel girders rest should be blocked up, and the trusses provided for supporting the roof arranged as shown in green on the tracing. The openings XX at level of landings of stairs should be filled in with brick nogged partitions (with windows in centre) supported by wooden beams 5" x 7". The doors at G thin G in the south wall (first floor) should be replaced by windows, there being no verandah on this side. The arched opening at P on the west side at about half way up the stairs should be blocked up. According to the drawing the front rooms are provided with clerestorey windows. Those alongside the verandah should be omitted as the space between the main roof and the verandah roof is insufficient for their insertion.

The tie beams of roof trusses in room D should be placed 9" higher than those in the front main rooms so that the ridges may (as shown on the drawing) be at the same level throughout, the pitches of the roofs remaining uniform.

By these alterations which have been given effect to in the Chief Engineer's office, the amount of the estimate is reduced from Rs. 12,800 to Rs. 12,400.

3. The maximum pressure is 1.49 tons on the soil and 4.08 tons on masonry. The Superintending Engineer should satisfy himself as to the soundness of the existing masonry work, and also that the existing foundations are sufficient to carry an upper storey.

It is reported that the sizes of the wooden joists supporting the existing terraced roof are 2" x 8". The Superintending Engineer is requested to see that these joists are in good order, and that, as the terraced roof is now to become a floor, whether its thickness cannot be safely reduced in order to lighten the load on the joists.

4. With these remarks, the revised drawings and the revised estimate as altered in the Chief Engineer's office, the latter amounting to Rs. 12,400 are recommended for approval.

S. B. MURRAY,
Chief Engineer, P.W.D.

Order—No. 115, Home (Education), dated 1st February 1918.

The Government are pleased to sanction a grant not exceeding one-half of the actual expenditure, nor Rs. 6,200 towards the cost of adding an upper storey over a portion of the Hindu High School building at Srivilliputtūr, Ramnad district, subject to the following conditions:—

(1) that in carrying out the work the suggestions of the Chief Engineer in his note No. 428 C, dated the 19th January 1918, are adopted; and

(2) that all the conditions prescribed in the Grant-in-Aid Code have been duly complied with.

2. On the above conditions being fulfilled the grant will be paid as funds become available.

(True extract)

R. RAMACHANDRA RAO,
Secretary to Government.

To the Director of Public Instruction with plans, estimates and Chief Engineer's note.
" Accountant-General.
" Collector of Ramnad.
" Public Works Department.
Editors' Table (order only).

Not printed
 Home (Eo?) Dept.

Building grant toward improvements to the building of the Hindu high school, Trivilliputur, Ramnad.

[C. 676] From the Div. of Pub. Works, R.C. No 435, dated the 9th Feb 1917.

For Regr.


The plans and estimates may be forwarded to the P.W.D. u.s. for scrutiny.

SD
 13.2.17
SL
 13.2.17

SL
 14.2.17
 P.W.D. u.s.



Eol no 676-1
 15.2.17

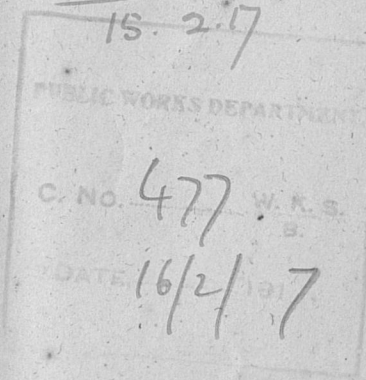

P.W.D.

Note by the Chief Engineer No 608
 dt. 1.5.17

For DS

The plans and estimates have been scrutinized in the Chief Engineer's office and his remarks are contained in his note read above. The file may now be returned to (E.S.) for revision as recommended by the Chief Engr. vide para III of his note on p. 4. C.F.



P.W. 477 66/17-1
 DATE 1.5.17

W.S.B.
16/2
16/2
16/2

26/4/17 Edl u.s.

16/2
 30.4.17

Home (Son) Department.

A draft memo. is submitted for approval.

2/17 JH
4.5.17

Q
7.5.17

[memo. no. 676B-2 d. the 7. 5. 17]

[no. 1137B]. From the S.P.S. Re no. 435/17 d. the 5. 10. 17.

The revised plans and estimates now received may be forwarded to P.W.D for scrutiny.

8.10.17

Q
10.10.17

P.W.D

P.W.D

Note by the Chief Supt. P.W.D. no. 428C

19.1.18

For AS

The revised plans & estimates have been scrutinised in the Chief Engineer's office and the amount of the estimates has been reduced to Rs 12,400- vide Chief Engineer's note read above.

2. The file may now be returned to Home

(592) Dept. -
16/11 KLB 18.1.18 Ecll. W.D.



Edwen: 676B-3
10.10.17

PUBLIC WORKS DEPARTMENT.
C. NO. 2379 W. K. S. B.
DATE, 12-10-1917

DE 12/10 PP 34 CF



P.W.D. no. 2379
11.1.18

16/11 KLB

19.1.18

NOTES.

b

Home (Eon) Dept


Page

A draft order is submitted for approval.

PA
25.1.18

CR
25.1.18

CR
31.1.18
17/2/18



Building Grant.

Home (EDUCATIONAL DEPARTMENT.

Sanctioning a grant of Rs. ~~6,300~~ ^{6,200} towards the cost of adding an upper storey over a portion of the Hindu high school building at Srivilliputtur, Ramnad dt.

READ AGAIN G.O., No. _____, dated _____ 191

" " " " _____, " _____ 191

READ ALSO:-

C. No. 676, From the _____, No. 435/17, dated 9-2-1917.

" " 113703, " " _____, No. 435/17, " 5-10-1917.

" " _____, " " _____, " _____ 191

Note by the Chief Engineer PWD, " 428 C, " 19-1-1918.

ORDER.

No. 115, dated 1-2-1918

THE Government are pleased to sanction a grant not exceeding one-half of the actual expenditure, nor Rs. 6,200/-

towards the cost of adding an upper storey over a portion of the Hindu high school building at Srivilliputtur, Ramnad dt., subject to the following conditions:-

- (1) That in carrying out the work the suggestions of the Chief Engineer in his note read above are adopted; and
- (2) that all the conditions prescribed in the Grant-in-Aid Code have been duly complied with.

2. On the above conditions being fulfilled the grant will be paid as funds become available.

To The Director of Public Instruction with plans, estimates and Chief Engineer's Note.
" Accountant-General.

" Collector of Ramnad.

" PWD in (Ramnad)

" ET (order only)

PP
25.1.18CR
25.1.18CR
31.1.18

17/2/18

Read again G.O. No. 115 dated 1-2-1918

G. No. 115

Note by the Chief Engineer

ORDERS

The Government are pleased to sanction

grant necessary one-third of the actual cost

endure, nor Rs.

to the cost of

to the following conditions:

(1) That in carrying out the work the eng-

gineers of the Chief Engineer in his

note read above are adopted and

(2) that all the conditions prescribed in the

Grant-in-aid Code have been duly com-

plied with.

3. On the above conditions being fulfilled

to grant will be made as funds become available.

10/1/18


The Director of Public Instruction with

to the Chief Engineer's Note

for the same

ORDINARY. PRESS SLIP. PREFERENCE.

Seott. II-38-1-16. DEPARTMENT.



Current No dated 191
G.O. No. 115, dated 1-2-1918.

Number of MS. pages sent { (b) Correspondence.....
(b¹) Notes.....

Brief subject.....

(c) Number of copies required when struck off (not including copies for volumes and editors' table which are retained in the Press).	E. T. copies to supply requisitions for purchase by the public.	Complete correspondence and orders.	Notes.
FOR RECORD.*			
Madras Records ...	4	20	
Ooty Records ...		5	
For filing with original		1	
Total ..		26	

FOR ISSUE.†

	Letter only.	Complete G.O.	Special issue copies (b) of G.O.		Notes.
			No.	Papers.	
Signature copies.....		3			
India Office.....					
Govt. of India..... Dept.					
Revenue Department.....					
Public Works Department.....		4			
Local and Municipal Department.....					
Educational Department.....					
..... Dept.					
Public Dept.....					
Judicial Dept.....					
Political.....					
Financial Dept.....					
Marine Dept.....					
Ecclesiastical Dept.....					
Total					
Spare copies.					
The.....		4			
The.....		6			
The.....		2			
The.....					
The.....					
The.....					
The.....					
The.....					
The.....					
The.....					
The.....					
The.....					
The.....					
The.....					
Total					

INSTRUCTIONS FOR THE SECRETARIAT.

- (a) If a paper is marked to be printed urgently, the Superintendent of the section concerned should sign the Press slip. The Superintendent should exercise a careful discretion in the matter.
- (b) Each letter, memorandum, or order, or set of orders, in the file of correspondence should be headed in succession with the Roman numeral I, II, III, etc., the number being written in red ink or blue chalk above the item. The particular papers to be printed in the special issue-copies should be indicated by the Roman numeral (I, II, etc.) by which that item has been headed in the correspondence file. All matter, including marginal remarks or references, to be printed should be written in ink and matter which should not be printed should be encircled. Initials and signatures that are not quite legible should be re-written distinctly.
- (b¹) For rules regarding printing of notes, see rule 315 of the office Manual.
- (c) The number of copies and the details of distribution should be filled in by the Superintendent or Referencer concerned.
- (d) In the absence of special instructions to the Press to keep matter standing for a specified period, ordinary papers of 8 pages and under will be kept standing for one week, and larger papers for two weeks only. The type of notes and of all confidential papers is distributed immediately after striking.
- (e) This slip, properly and completely filled in, should accompany every paper sent to Press; it will be returned by the Press when proofs are furnished; it should be sent to the Press when a call is made for revised proofs or when a corrected proof is sent for striking. When finally returned by Press it should be filed with the original order or letter.

INSTRUCTIONS FOR THE PRESS.

- (a) If, in the opinion of the Superintendent of the Press, a paper has been marked urgent unnecessarily, he should send the Press slip to the Registrar with a remark to that effect.
- (b) Unless a note to the contrary is made against the matter, pencil entries should not be printed. The Superintendent of the Press may bring to the notice of the Registrar any instance of incomplete or careless editing.
- (c) Signature copies of letters to the Secretary of State or to the Government of India should be printed on hand-made paper.
- (d) This slip should be returned by the Press to the Secretariat when proofs are furnished; it will be sent back to the Press when proofs are returned corrected and should be finally returned to the Secretariat when struck-off copies are supplied.
- (e) The names of the Secretary and Members should be printed in full when they occur on the right hand side, only the first time when they appear on the left side, the initials alone being printed later.

* Copies distributed on ‡(Press Clerk).
† Copies distributed on ‡(Press Despatcher).

‡ To be initialled and dated.

TO PRESS, MADRAS OOTY.

A

Please send proof in duplicate. The papers have been carefully edited.

Referencer.
Clerk.

Supdt.

B

Proof returned corrected. Please strike off and send number of copies as indicated.

Type may be released after usual interval.
at once.

Referencer.
Clerk.

Supdt.

C

As the matter is clear manuscript and has been carefully edited, (b) proof need not be sent. Please print and supply number of copies as indicated.

Type may be released after usual interval.

Referencer.
Clerk.

Supdt.

SPECIAL INSTRUCTIONS.

TO BE FILLED IN BY THE PRESS.

Diary.	Initials of Press official.
Received in Press on.....	
First proof furnished on.....	
Call for revised proof received on.....	
Revised proof furnished on.....	
Corrected proof received for striking on.....	
Final copies supplied on.....	13/2/18 <i>W. S. S.</i>

Account of copies.	Complete copies.	Notes.	Issue copies.	Special E.T. edition.
Supplied to Secretariat for Record.....				
" " " Issue.....				
" " " for Extra E.T. copies to supply requisitions for sale to the public.				4
For Volumes.....				
For supply to newspapers and institutions admitted to the privileges of the E.T.				
Total ...				