M.R.O. 1—82,400—28-11-30.

MADRAS RECORD OFFICE.

Government of Madras.

Public Works DEPARTMENT.

Con 23-12-57

G.O. No. 2348 Press Mis.

43-44

Dated 18-12-1857

Not to be folded or roughly handled

Fort Saint George Public Works, Consultation of 23rd December 1857.

No. 43. Read the following Extract from the Minutes of Consultation in the Public Department, dated 10th December 1857, No. 1746.

Read the following Extract Minutes of Consultation in the Public Works Department.

Referring copy of a letter from the Chief Engineer, forwarding a revised estimate for the erection of the Civil Dispensary at Vizagapatam, amounting to Rupees 17,200, from which deducting Rupees 10,225, contributed by private parties, and Rupees 5,000 by Government, there remains Rupees 1,975, which he recommends for sanction. (Here enter 20th November 1857, No. 2134.)

Amount of revised estimate	Rupees	17,200
Local subscriptions	,,	10,225
Government contributions	,,	5,000
	,,	15,225
	Excess Rupees	1,975

The revised estimate now submitted, for constructing a Civil Dispensary at Vizagapatam, amounts to Rupees 17,200, being Rupees 1,975 in excess of the total contributions towards that object.

2. The Building being, it is stated, well advanced, the Government sanction on emergency, the further sum, Rupees (1,975) one thousand, nine hundred and seventy-five, required for its completion.

(True Extract.)

(Signed) T. PYCROFT,
Chief Secretary.

No. 44. ORDER THEREON, No. 2348; dated 18th December 1857.

Ordered to be communicated to the Chief Engineer with reference to his letter dated 9th November 1857, No. 5071.

(Signed) H. FORBES,
Acting Secretary to Government.

PUBLIC DEPARTMENT.

No. 1746.

Extract from the Minutes of Consultation, under date the 10th December 1857.

Read the following Extract Minutes of Consultation, in the Public Works Department.

Referring copy of a letter from the Chief Engineer, forwarding a revised estimate for the erection of the Civil Dispensary at Vizagapatam, amounting to Rs. 17,200, from which deducting Rs. 10,225, contributed by private parties, and Rs. 5,000, by Government, there remains Rs. 1,975, which he recommends for sanction.

(Here enter 20th November 1857, No. 2134.)

Amount of revised estimate	*Rupees*	17,200
Local subscriptions	,,	10,225
Government contributions	,,	5,000
	,,	15,225
	Excess Rupees	1,975

The revised estimate now submitted, for constructing a Civil Dispensary at Vizagapatam, amounts to Rupees 17,200, being Rupees 1,975 in excess of the total contributions towards that object.

2. The Building being, it is stated, well advanced, the Government sanction, on emergency, the further sum, Rupees (1,975) one thousand nine hundred and seventy-five, required for its completion.


(True Extract.)

Chief Secretary.


To the Department Public Works, with a plan and estimate.
,, Accountant General.
,, Civil Auditor.
,, Collector of Vizagapatam.

Exd. F. Cartledge.


Plan Elevation and Section of the Civil Dispensary at Vizagapatam

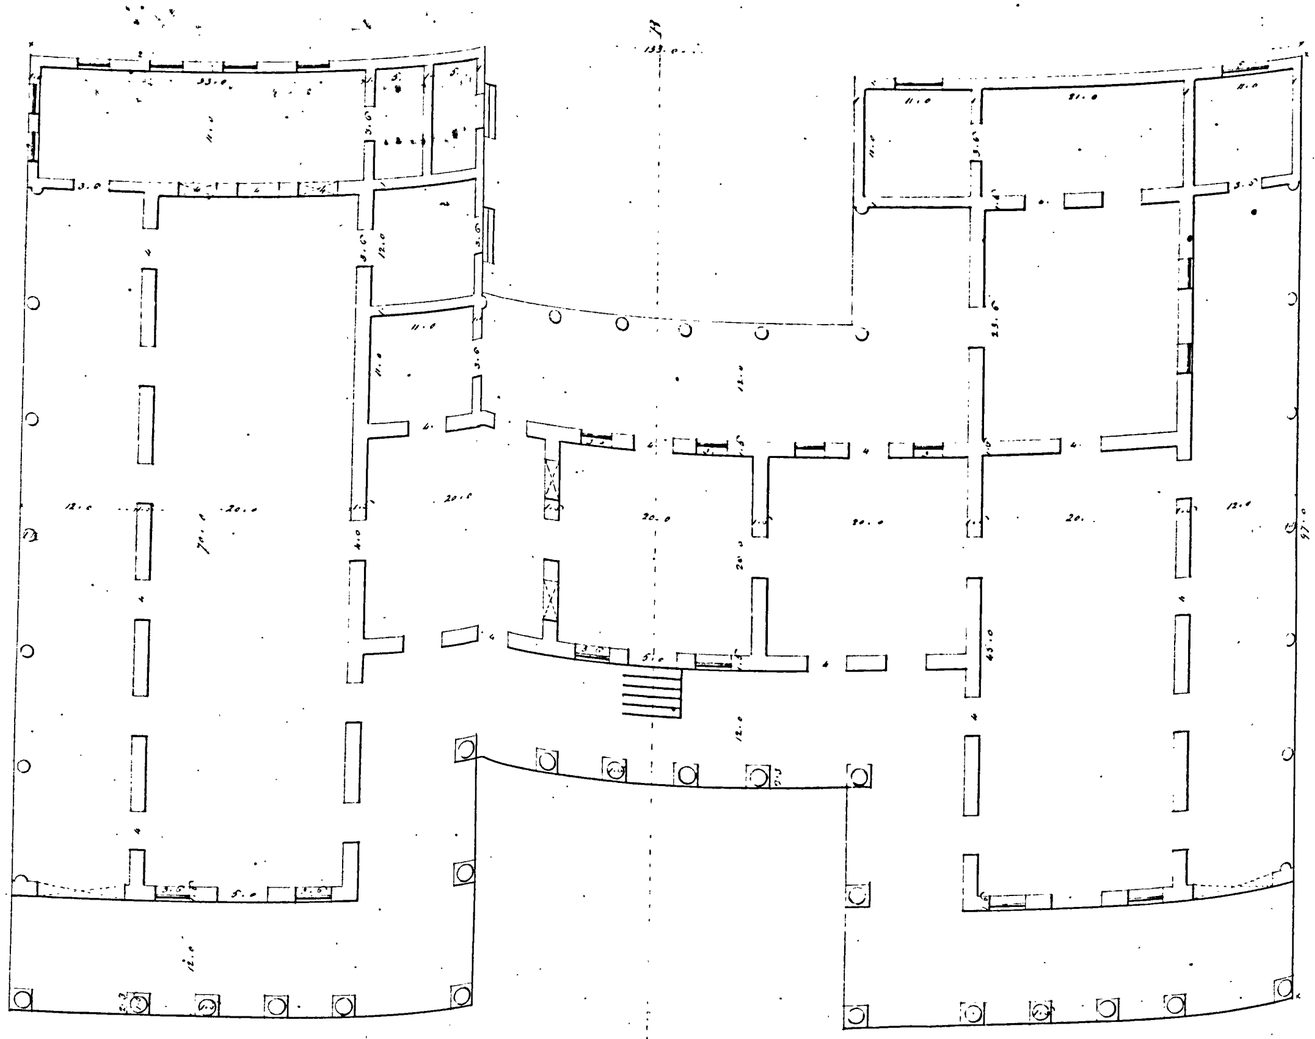

Elevation

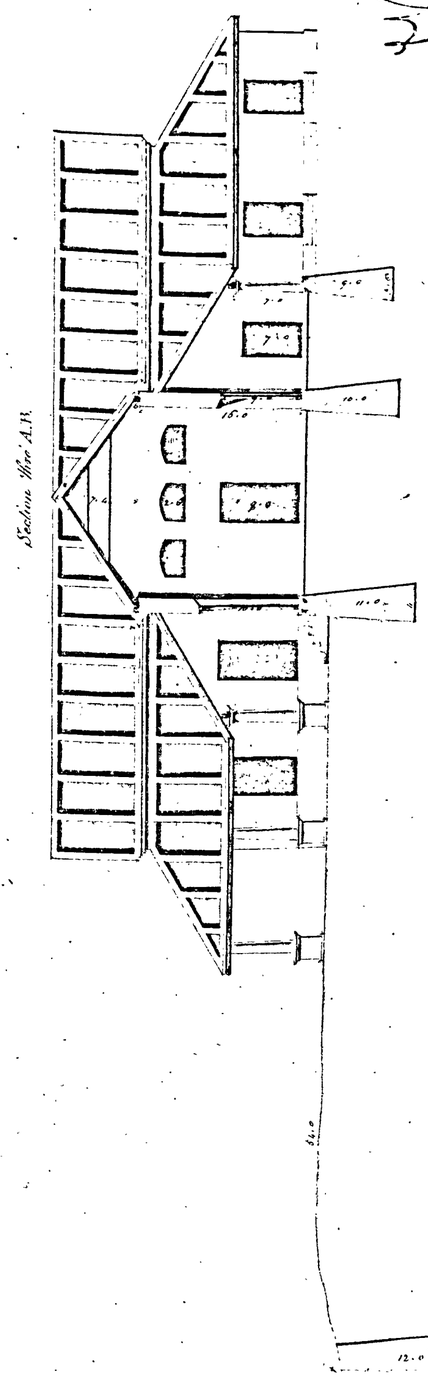

Section thro' A.B.



Co. Nisk. Engrs Office Vizagapatam

Nisk. Engrs Office Vizagapatam
the 1st October 1857
Wallace

To the Hon'ble Legislative Council

Plan Elevation and Section of the Civil Dispensary at Vizagapatam

No 1 2413/17

R/57.D.
Jan 1921.

Building

Estimate

District Vizagapatam

Work—Probable expense of Constructing a Civil Dispensary at Vizagapatam

Quantities	Description of Work.	Rate			Amount			Amount of Each part
1994½	C. Yds. Rough Stone in Chunam	1	4	1	2503	8	1	
195 27/58	___ do ___ Brick in Chunam	3.	4	2	615.	6	10	
38⅓	___ do ___ of Arch Work	3.	4	2	124.	15	9	
10½	___ do ___ of Cornice Work	3.	8	0	36	12	0	
262.29	Sqrs. of plastering 1 Coat Chunam	1.	8	0	393	7	0	
126.47.	___ do ___ 2 ___ do	1	14	0	237	2	1	
301	C. Yds of flooring	2	0	0	602	0	0	
71.4	Sqrs. of roofing the Main Building with Teakwood Couples &c	57.	13	4	4108	7	8	
84.15	Sqrs. of Slope roofing the Veranda around the main building with dammer wood &c	19	3	4	1616	6	1	
11.35	Sqrs. of roofing with palmyra rafters, reapers &c Complete	13.	.	.	147.	8	10.	
3	Teakwood pair of panelled doors Complete	40.			120	.	.	
28	___ do ___ do ___ of half panelled doors complete	30	.	.	840	.	.	
2	Teakwood pair of glazed doors &c Complete	36	.	.	72	.	.	
8	Teakwood pair of battened doors &c Complete	20	.	.	160	.	.	
6	___ do ___ do glazed windows &c Complete	35	.	.	210	.	.	
	Carried over				12787	10	4	

		Brought forward			1278	10 4
6.		Teakwood pair of glazed Windows with frames Vizt Complete	25		150	
6.		—— Do —— Venetian Windows with frames Do Do ——	15		90	
2		Do glazed Windows with frames Do —— Do ——	12		24	
1.		Country wood battened door with frames Vizt Complete			11	
2		Do Do Do	8		16	
20.		Cut Stone pillars complete	5.	8 0	110	
15		Do Do	3		45	
		Green painting 2 Coats to doors and Windows -	"		130	
					1336	10 4
1204	6/12	Levelling Course			627.	6.9
		Excavating foundation			280.	9.10
		Filling in basement			184.	8.7
					1392.	9.2
		Clearing Jungle			49.	1.8
		Road making			106	12.4
		Superintendence		10		
		Sundries including fraction 5			491.	3.3
					7961	3
		Total Estimate			17200	
		Deduct amount of old Estimate Rs			9220	
		Total Contingent Expenses			7980	

District Engineers Office
Vizagapatam
Camp Waltair
7th October 1857

Agt. District Engineer
Vizagapatam

Encl 9 of Govt. Order No. 1057 dt. 10.3.58

No. 2453/57 New Work

Public Works Dept.

Buildings

Estimate

District Vizagapatam

Work. Constructing a Civil Dispensary at Vizagapatam. —

Rs. 17200.

No. 2453
2240/57

Rs. 23,000 @ 3%

Rs. 23,000 @ 3½%

957.8.
In No 1921.

Encl 99

Comm. Mr. Stark's Corp. No. 54-56

P. Works 1857 Dept.
D. to Govt. 23rd Dec.
No. 2453

Extract from Govt. Corr. in the Public Dept.

Dated 16th Dec. 1857
Received 18th Dec. 1857

Encls: 2

Sanctioning an emergency, the further sum of Rupees 1975 required for the completion of the Civil Dispensary at Vizagapatam

No. 2348. 18th Dec.
With an order of

No. 43444.

No. 2348

Ordered to be communicated to the Chief Engineer with reference to his letter dated 9th November 1857. No. 5071.

Fort St. George
18th Dec. 1857

9 Copies to the Chief Engr. Dept.