M.R.O. 1—77,006—8-6-31.

(1) Number of pages 12

(2) Date of repair 21-4-38

(3) Initials of the Referencer

MADRAS RECORD OFFICE.

Government of Madras.

Public Works DEPARTMENT.

Cir. 15/8/38

G.O. No. 543 Press Mis.

3132

Dated 1-3- 18 59.

Not to be folded or roughly handled

Fort Saint George, Public Works Consultation of 15th March 1859.

No. 31. Read the following Extract from the Minutes of Consultation in the Military Department, dated 4th March 1859, No. 863.

Read the following Extract from the Minutes of Consultation in the Public Works Department.

Submits for sanction, a plan and Estimate, amounting to Rupees 3,000, for making certain improvements to the old Dragoon Hospital, at Bangalore. } (Here enter 18th February 1859, No. 405.)

Approved for immediate execution, the improvements being much required for sanitary reasons.

(Signed) H. MARSHALL, Colonel,
Acting Secretary to Government.

No. 32. ORDER THEREON, No. 543; dated 11th March 1859.

Ordered to be communicated to the Chief Engineer with reference to his letter, dated 11th February 1859, No. 7801. The estimate amounting to Rupees (3,000) three thousand, is sanctioned on emergency.

(Signed) W. C. SIM,
Actg. Dy. Secretary to Government.

3B

PUBLIC WORKS DEPARTMENT.

Military.

No. 405.

Extract from the Minutes of Consultation under date the 18th February 1859.

Read the following letter from Colonel C. E. FABER, Chief Engineer; to J. D. BOURDILLON, Esq., Secretary to Government, dated 11th February 1859, No. 7801.

SIR,

With reference to Extract from Minutes of Consultation, No. 2667, dated 9th December last, I have the honor to forward, for submission to Government, a Plan and Estimate amounting to Rupees (3,000) three thousand, for making certain improvements to the Old Dragoon Hospital at Bangalore.

2. The estimate has been examined in this Office, and the rates therein given have been found moderate but sufficient to carry out the proposed work, and are those current at the Station. I beg therefore to recommend Government to be pleased to sanction the amount, viz. Rupees (3,000) three thousand for execution.

Referred to the Military Department, with reference to Extract Minutes of Consultation in that Department, dated 17th November 1858, No. 4169.

(A true Extract.)

(Signed) J. D. BOURDILLON,

Secretary to Government.

To the Military Department, with Plan and Estimate.

eo. Fonceca.

Buildings (.....) ..... (New Work.)

Abstract of Estimate No.... of

District Bangalore

Work Raising the Main walls flow and fixing Swinging Windows

& Hospital of Old Dragoons

Quantities	Description of work.	Rate.			Amount	Amount of each part.
		Rs.	A.	P.	Rupees.	Rupees
Cubic Yds. 8229	Sup. Sft. Unroofing the Hospital and Convalescent wards Flgs	"	6	"	31	
	Taking down the Copleses &c do	"	"	"	15	
3626	Cft. Brick in Chunam — J Cft.	"	1	10	116	
374	do Arch work in Chunam do	"	3	6	78	
716	Rft. Cornice work in do J Rft.	"	6	11	266	
60	Sqrs. Plastering 1 Coat of Chunam J Sq.	2	4	"	133	
273	do Whitewashing 2 Coats inside do	"	2	"	36	
112	do Bluewashing 2 Coats Outside do	"	2	2	15	
3427	Cft. Filling the Basement with Sand — J 100 Cft.	1	8	"	81	
3427	Sup. Sft. Removing and Replacing the Paving with part new and part old flat Stone in Chunam — J Sq.	4	3	"	227	
8229	do Replacing the roof with part new and part old Teak & reepers nails flat and pantiles — do	7	5	"	602.	
716	Rft. Chunam borders round the eves — J Rft.	"	"	7	26	
				Carried over	1924	

Military Department

Sheet 3 B.

Abstract of Estimate accompanied by

Statement, Plan & Specification under Letter

No. dated Regarding the Hospital Buildings.

Bangalore

Lieut. Colonel

Commanding Royal Engineers.

Examined & Checked

Lieut. & Assistant Quarter Master

General Royal Engineers.

Examined & Recommended

Major

Commanding Royal Engineers.

Quantities	Description of work	Rate.			Amount.	Amount of each part
C. Yds.		Rs	A	P.	Rupees.	Rupees.
	Brought Over				1926	
	Replacing and refixing the Old Couples	"	"	"	20	
	No Seats Sweeping Windows Complete C	7	2	"	527	
3210	Supply & Lead Painting all the Doors and Windows with Linseed Oil 2 Coats & fix	3	10	"	293	
	Contingencies	"	"	"	236	
	Total of Rupees					3000

Central Office of Pr Wks
Fort Saint George
11 February 1839

Attested Colonel
Chief Engineer D. P. W.

Enclosure

In a Letter

From The Chief Engineer &c &c.

To The Secretary to Government
&c &c &c

Dated 11th February 1859.
Received
G.O. No. 534/59
Rs. 7801-

Abstract Estimate for Raising the Main walls flanking Fencing Drainage Culverts &c. Hospital of Field Staff Corps at Bangalore.

Amounting to Rs 3111-0-

Approved
Chief Engineer
Dated 9th February 1859


{Executive Engineers Office Bangalore 4th February 1859}


Executive Engineer in Bangalore

Plans and Sections


Shewing proposed improvement to Old Dragoon Hospital Bangalore

Called for in Extract from the Proceedings of the Chief Engr D.P.W. No 6208, dated 11th Dec. 1855

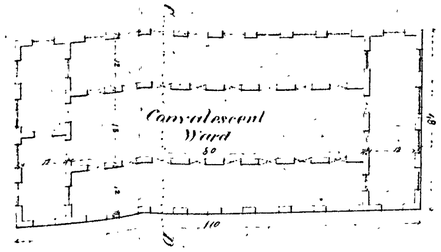


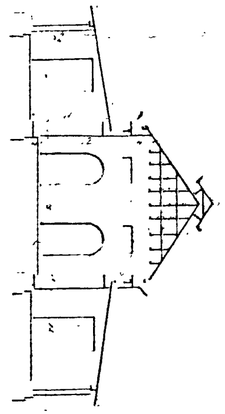

Section on A B

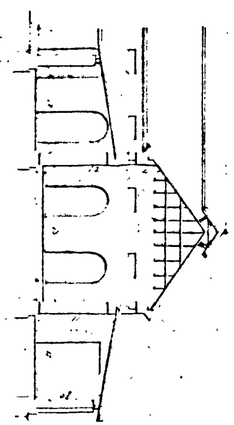

Section on C D

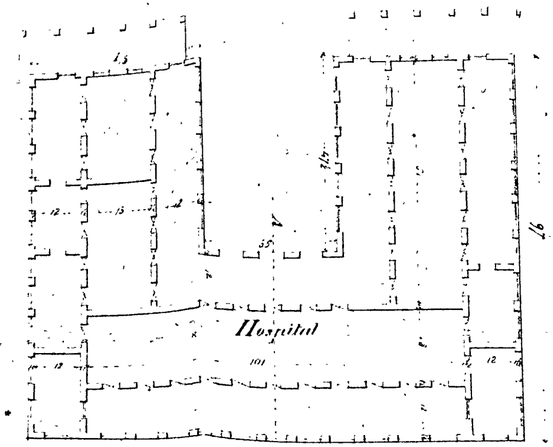

Executive Engineers Office Bangalore 4th February 1856

Chief Engineer

Captain

Executive Engineer in Bangal

To Genl 11 Feb 57th 1801

Ad
Encl. 924 of 1857

534/57
P.W. No 330

Plan shewing
proposed improvement
to Old Dragoon Hospital
Bangalore

No 5348.

Extract from a Letter from the Secretary to the Commissioners for Chelsea Hospital, dated 9th May 1809.

Sir,

I am directed by the Commissioners for Chelsea Hospital to transmit to you, for the information of the Secretary of War, a Memorial from Assistant Surgeon Alexander Gordon, late of the Hospital at Bangalore, stating his having contributed essentially to the introduction of the Cow Pox into the Madras Establishment, and requesting to be allowed a Pension in consideration of his services.

I am, Sir,
Your most obedient humble Servant,
Alexr. Hamilton
Secretary.

To Lieut. Colonel Torrens,
&c. &c. &c.

No 5348. War Office, 9th May 1809.

Mr. Gordon.