M.R.O. 1—77,006—8-6-37.

(1) Number of pages 2

(2) Date of repair 1-1-03

(3) Initials of the Referencer

MADRAS RECORD OFFICE.

Government of Madras.

Public Works DEPARTMENT.

G.O. No. 306 Press ~~Mis.~~

638–640

Dated 25—~~2~~— 1846.

Not to be folded or roughly handled

A2

Proceedings of the Madras Government, Public Works Department, 25th January 1866.

Read the following papers :—

No. 638. From the Superintending Engineer, 7th Division, to the Secretary to Government, Department Public Works, dated Coonoor, 3rd January 1866, No. 223.

I have the honor to submit for sanction plan and estimate of certain alterations required to the Moonsiff's Court-house at Palghât, consisting in the addition of a private-room for the Moonsiff himself, of a back verandah to shade his bench from the direct action of sun and rain, and of glazed windows to admit light in the monsoon, the whole to cost Rupees 700. The original papers submitted by the Range Officer, in communication with the Moonsiff, have been revised by the former under orders from the Judge and myself; and what is now proposed will greatly improve the Court. Funds are not at present available, but, if the work is sanctioned, can hereafter be applied for from the Reserve of 1866-67.

Referred to the Judicial Department.

FORT SAINT GEORGE, *8th January* 1866.

(Signed) CHARLES A. ORR, Colonel, R. E.,
Secretary to Government, P. W. D.

No. 639. Memorandum from the Chief Secretary to Government, Judicial Department.

(Here enter 16th January 1866, No. 20.)

No. 640. ORDER THEREON, 25th January 1866, No. 306.

CIVIL WORKS, No. 112.

1. The estimate, amounting to Rupees 700, for certain alterations and additions to the Moonsiff's Court-house at Palghât in the Malabar District is sanctioned. The Superintending Engineer will apply for a grant of money from the Reserve of 1866-67.


2. The Government observe that, under the new arrangement, the only entry to the Record-room appears to be by the steps which lead to the enclosure proposed to be railed off for the bench. As this will be found inconvenient, the Superintending Engineer will consider whether a gate could not be fixed in the rail, at the spot marked in pencil on the accompanying plan.

(True Extract.)

(Signed) CHARLES A. ORR, Colonel, R. E.,
Secretary to Government.

To the Superintending Engineer, 7th Division, with one Plan and Report.
,, Accountant General.
,, Controller of Public Works Accounts.
,, Judicial Department.

Exd. S. T. Augustin.

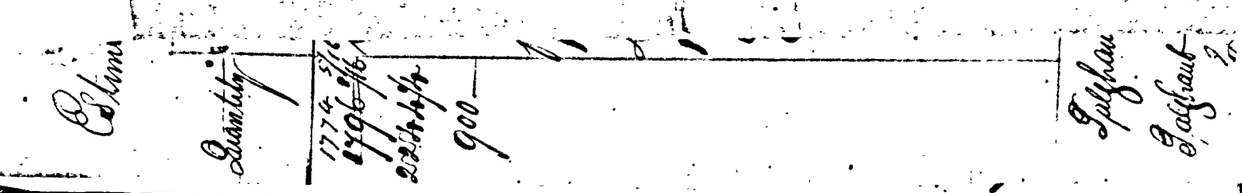

Abstract

Estimate of the probable cost of making certain alterations and additions to the Munsiff's Court House at Salghaut

Quantity	Particulars of Work		Rate	Amount		Remarks
1774 5/16 1796 5/16	Cubic feet of Brick in chunam	@	14 ..	per 100 cft	248 6 5 ~~251 4 5~~	
2244 4/4	Sq. feet of plastering 2 coats in chunam	@	3 ..	per 100 sft	by 5 3	
900 —	Do. of roofing with Verandah Summers wall plates rafters purlins flat and pan tiles with chunam ridges	@	3 20 ..	per D.	180 ..	
1	Batten Door 6×3/2 with frame hinges hooks &c complete	@	10 8 .	each	10 8 .	
4	Window frames with glazed sashes 4×3/2 with fastenings D	@	14 ..	D.	56 ..	
133	Running ft of railing	@	. 8 .	per ft	66 8 .	
	Removing present Bench and making good the walls and floor	@			10 ..	
	Designs foundation and Sundries				61 4 4 ~~58 3 7~~	
				Total Estimated Amount Rupees	700 ..	

Salghaut Range
Salghaut Office
Salghaut 18 October 1796

Detailed Estimate
(Signed) H. D. Cook
Civil Judge

Superintendent

H. D. Cooke
Supervisor &c
In Charge of Salghaut Range

No 223

Superintending Engrs Office 7th Div
Cossipore 3rd January 1866.

From

Lieutenant Colonel G. W. Walker R.E.
Superintending Engineer 7th Div

To

Colonel C. A. Orr R.E.
Secretary to Govt. B.P.W.

Sir,

I have the honor to submit for Sanction Plan and Estimate for certain alterations required to the Monsiff's Court House at Calpharat, Consisting in the addition of a Private Room for the Monsiff himself, of a back Verandah to shade his Bench from the direct action of Sun and Rain, and of glazed windows to admit light in the Mooseoir, the whole to cost Rupees 700.— The original papers submitted by the Range Officer in Communication with the Monsiff, have been revised by the former under orders from the Judge and myself; and what is now proposed will greatly improve the Court-House are not at present available; but, if the work is Sanctioned, can hereafter be applied for from the Reserve of 1866-67.

I have the honor to be
Sir
Your Most Obedient Servant

G. W. Walker Lieut Col. R.E.
Supg Engineer 7th Div

Lr Letter No 223 of 3rd January 66 from the Supg Engr 7th Div
To Govt B.P.W.

Dated 3rd Jany 66
Received 20th Do

Estimate for making certain alterations and additions to the Monsiff's Court House at Calpharat Rs 700 — —

Rs 700 — —

Judicial Department.

No. 20

MEMORANDUM.

The Chief Secretary has the honor to return the letter noted in the margin, together with the Plan and Estimate which accompanied it for ~~the~~ *making certain alterations and additions to the Bromcliffe Court House at Palghat in the Calicut District* — — — and to inform Colonel Orr that he sees no objection to the ~~Plan~~ *execution of the work.*

From the Superintending Engineer 1st Division 3rd January 1866 No. 223

Fort St. George,
January 1866

G. J. Cumberland
Chief Secretary.

The Secretary to Government,
Public Works Department.

Rejected
Submitted for Judicial Department
Copy forwarded to the Superintending Engineer 1st Division
The Secretary to Government
Public Works Department

Circulated

Civil Works

Public Works Dept

No 306

Proceedings of the Madras Government

Under date the 25th January 1866

Read the following

From the Supg Engineer of the 7th Division

Submits for sanction Plan and Estimate for certain alterations required to the Moonsiffs Court House at Palghaut. (Recd enter 3 January 1866 No 223)

From the Chief Secretary to Govt Judicial Dept. (Recd enter 16th " No 20)

The Estimate amounting to Rupees 700 for certain alterations and additions to the Moonsiffs Court House at Palghat in the Malabar Dist. is sanctioned.

The Superintending Engineer will apply for a grant of money from the Revenue of 1866/67.

To Supg Engr "D" with Plans & Estimate returned
3 Accountant
4 - Comm
Judicial Dept
Dated 25th Jany

Recd 26th Jany 1866 R. 23rd

Recd 1866 Depts
Pros. of Govt for January
No 208.
From the Chief
Secy to Govt Chief
Department
Dated 16 January 66
Recd 17 " "

E. 4 No 20

Stating that he sees no objection to the execution of the proposed alterations to the Moonsiffs Court House at Palghat in the Malabar Dist.

No 639.

Dated 20th Jany 1866

Recd 23rd

2. The Govt Scheme that under the new arrangement the only entry to the record room appears to be by the steps which lead to the Enclosure proposed to be railed off for the Bench – As this will be found inconvenient, the Surveyor will consider whether a gate could be fixed in the rail, at the spot marked in pencil on the accompanying plan

The only entry to the record room under the new arrangement – or through the Enclosure railed off for the Bench. Either there ought to be a gate in the rail at the X pencil, or a door like this at the XX in the wall of the Clerks' room. In the table however there are drawers &c. at present. The Surveyor suggests that such drawers should be taken out of the table & placed under the steps of the raised platform of the floor which the Bench occupies, & that the top of the table should be covered with leather or cloth so as to make a writing desk for the Clerks.

22 - 66

20 Jany 1866 R. 230

35

Dated 1865 Despatch
from Govt. for
Copy

No. 306
from the Govt.
Dated 25 January 1866

Moonsiffs Court
House at Palghat
Malabar District.
the Estimate amounting
to Rs. 700 for certain
alterations and ad-
ditions to sanctioned
plan.

No. 638 640