M.R.O. 1—10,006—28-2-50.

(1) Number of pages_____

(2) Date of repair_____

(3) Initials of the Referencer_____

MADRAS RECORD OFFICE

Government of Madras

pub. works DEPARTMENT

G.O. No. 3314 Press

~~B.P. No.~~ ~~Mis.~~

கஎ5-கஎ9

Dated 24. 11. 1870. ~~195~~ :

Not to be folded or roughly handled

Proceedings of the Madras Government, Public Works Department,
24th November 1374.

No. 408. Read the following letter from Colonel C. V. WILKIESON, R.E., Superintending Engineer, Coimbatore, to Colonel G. W. WALKER, R.E., Secretary to Government, Public Works Department, dated Coimbatore, 2nd November 1874, No. 100 :—

Three Estimates.

WITH reference to G. O., No. 1,289, of 13th May 1874, I have the honor to forward, for sanction and provision of funds, the undermentioned estimates which have been approved of and countersigned by the Collector :—

		Rs.
1.	Alterations and additions to the Taluq Cutcherry at Pullachy ...	340
2.	Do. do. to the do. at Oodamulpetta...	340
3.	Do. do. to the do. at Erode ...	350
		1,030

2. In the estimate for improving the Erode Cutcherry you will observe provision is made for two punkahs which the Collector considers necessary as Erode is a very hot station.

No. 409. ORDER THEREON, 24th November 1874, No. 3,314.

CIVIL WORKS, No. 30.

THE estimates for the alterations approved in G.O., No. 1,289, of 13th May 1874, are sanctioned, and the Superintending Engineer is authorized to carry out the work by transfer from Repair Funds, if available.

2. The question of provision of punkah at Erode will be considered in the Revenue Department.

(True Extract.)

Colonel, R.E.,
Secretary to Government.

To the Superintending Engineer, Coimbatore.
,, Controller of Public Works Accounts.
,, Revenue Department, with G. O., No., 1,289 of 13th May 1874.

Exd. S. T. Austin.
Spare Copies

2004
13/10/14

2205
30/10/14

Specification to accompany Estimate for improving Erode Taluq Cutchery

1. The Door leading from the Treasury room to the Cashiers is simply to be reversed and reversed so as to lock inside.

2. Iron Doors and Fixed gratings. The Vertical bars are to be removed and reinserted closer to each other than they now are and a new bar will be added to close the Extra Space which remains. The bars will be placed at equal distance from each other and whole Iron frame will be fixed to the wooden frame by Screwreversible screws.

3. Brick walls will be built on either side of the Cashiers room to prevent the inconvenience felt by an excessive play of wind in the Scales while weighing money.


4. The present wooden shutters of the Record room windows will be removed and glazed shutters substituted fixed on hinges so that they could be opened if Ventilation required.

5. There are to be 2 Punkahs each 8 ft. long, made as usual with wooden frames Covered over with Brown Holland

and

and having a fringe of the same cloth. They will be suspended as shewn in the Margin.

Iron brackets will be fixed to the purlins projecting out so as to reduce the distance of 9 ft. from purlins to purlins to six ft. from bracket to bracket.

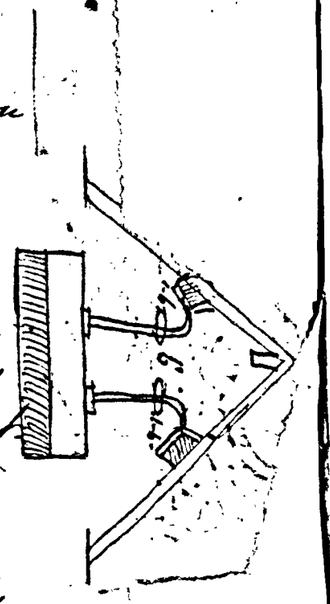

6. The Standard platform is to be raised 6" Inches.

7. A block of Brick work 1x1x1 will from the platform on which the guage is to be placed and this is to be built on the Treasury terrace as the most suitable place.

Bhowany.
9th October 1874.

Most obdt.
Supervisor.

No. 3314-24-N-74.

2004 / 12/10/74 / 220/14 / 30/10/74

IRRIGATION RANGE — COIMBATORE DISTRICT.

No. of 187-

Estimate of the probable cost of Improving the Taluq Cutchery at Erode Irrigation Range.

Taluq.	Name of work.	Measurement. Length	Breadth.	Depth.	No.	Contents.	Particulars of work.	Rate.	Per.	Amount of each. Article	Work.	Explanation of necessity of work, when last repaired, and at what cost.	By whom recommended
		"	"	"	1	Door	Renewing the Iron door and wooded Shutters @	2 " "	each	2 " "	✓	Estimate sanctioned by the Collr. & Agt. vide his Proc. dated 13th June 1874 and Estimate by Exve Engr. dated 22nd June 1874	
		"	"	"	10	—	Iron doors - Renewing 3 Iron bars and resetting in other places adding one extra bar 8½ ft. long and ¾ inch square and adding 2 new flat Iron bars 2" × 2" × ¼ and 18 Non-reversible Screws @	8 " "	"	80 " "	✓		
					3		Fixed Gratings, 5 Iron bars to be removed and refixed in other places, One new bar 8½ × ¾ × ¾ to be added and 3 new flat Iron bars 4 × 2 × ¼ to be added and 12 Non-reversible Screws @	8 " "	"	24 " "	✓		
		10	1¼	8	1	100	Brick wall near fixed grating						
		7⅓	1¼	4	1	36⅔							
						136⅔	Cft. or 5 Cyd. of Brick in Chunam @	5 8 "	Cyd.	27 8 "	✓		
		10	17¼	—	—	172½	Plastering above						
		7⅓	9¼	—	—	67 5/6							
						240⅓	Sft. or 2⅔ Sqd. of Plastering 2 coats @	2 8 "	Sqd.	6 " "			
		8	2	—	14	14	Glazed Shutters to Record room windows @	12 " "	each	168 " "	✓		
		2	8	—	—	16	Rft. 2 Punkahs each 8 ft. long including bottle wheels ropes &c complete @	1 2 "	Rft.	18 " "	✓		
					1		Raising Thandaur flat form 6" @	5 " "	each	5 " "	✓		
					1		Flat form 1 ft. high for guage @	" 8 "	"	8 "	✓		
							Total			331 " "			
							Sundries ½ at per cent			17 " "			
							Total Estimate Rupees			348 " "			

Irrigation Range Office
Bhowany, 9th October 1874

Executed.
Superintendent.

Examined Colonel R.E.
Superintending Engineer Coimbatore

Accepted.
Collector.

Civil Buildings. New Works.

1104 15 7 74

Detailed Estimate No. 21 of 1874-75.

Work alterations & additions to the Talug Cutcherry at Odaumulpettah.

Description of work.	No.	Measurement L	B	D	Contra
Record Room					
Converting insertion windows into glazed	12	8½	1¾		
Treasury.					
Iron grated doors to be converted into fixed iron gratings with 3 additional upright rails 3¾ from centre to centre.	2	8	4		
Iron grated door removed & refixed closer with 3 additional bars of ¾ inch	1	8	4		
Fixed iron grating removed & refixed with iron bars closer	1	8	4		
Wards.					
Iron grated doors to be removed & refixed with 3 additional upright rails of ¾" thick at 3¾" apart from centre to centre	4	8	4		
Fixed gratings removed & refixed with iron bars closer	2	8	4		
Opening pass between treasury & Cashiers room.					
Breast wall		18	1½	4	90.
Total Cyds. Brick in chunam					35

Camp Pollachy
11th July 74

Checked JK

Assistant
Range Officer

Civil Buildings
Cuddapah District.

From
The Executive Engineer
Irrigation Range

To
The Superintending Engineer
Southern Circle
Trichinopoly

Dated 7th July 1874

Received 11th July 1874

No. 1104

Estimate of the probable cost of
Supervising Talug
Cutcherry at Gooty

Amount Rs. 348 - -

Numbers	Taking	Quantity	Description of work.	Price	Rate	Amount £ s. d.	Valuation of Building.	Date of Contract or Estimate	Explanation of the necessity for work &c.	By whom recommended
			Alterations & additions to the Ealing Cutchery at Pollock.							
			Record Room							
12			Converting insertion windows into glazed ones @	10	120					
			Treasury.							
2			Iron grated doors converted into fixed iron gratings	18	36					
1			Do. removed & refixed with iron bars closer	20	20					
1			Fixed iron grating removed & refixed with iron bars closer	18	18					
			Wards.							
4			Iron grated doors removed & refixed with iron bars closer	20	80					
2			Fixed gratings Do. Do.	18	36					
			Open space between Treasury & Cashiers room							
8		2½	Cyds of Brickwork in cheman with plastering	7	23 5	4 333 5 4				
						16 10 8				
			Sundries &c							
			Total Estimate Rupees			350 - -				
			Deduct for old materials			10 - -				
			Total Estimate Rupees			340 - -				

1,250-0

Not required.

Examined & Checked

Colonel R.E.
Superintending Engineer

Ranee Officer

Civil Buildings. New Works.

Details Estimate No. 20. of 1874-75

Work Alterations and additions to the Ealing Catalogue at Pollachy.

Description of work.	No.	Measurement L	B	D	Contract.
Record Room					
Converting venetian windows into glazed	12	8½	1¾		
Treasury.					
Iron grated doors to be converted into fixed iron gratings with 3 additional upright rails 3¾" from centre to centre.	2	8	4		
Iron grated door removed & refixed closer with 3 additional bars of ¾" thick.	1	8	4		
Fixed iron grating removed & refixed with iron bars closer	1	8	4		
Wards.					
Iron grated doors to be removed & refixed with 3 additional upright rails of ¾" thick at 3¾" apart from centre to centre.	4	8	4	1	
Fixed gratings removed & refixed with iron bars closer	2	8	4		
Open space between Treasury & Cashiers room Breast wall.		18	1¼	4	90 /
Total Superficial Brick in Cement					3½ /

Coimbatore Range Office
Camp Pollachy 11th July 1874

Range Officer

Copy of Letter from the Superintendent Ceded Districts to the Secretary to Government No. 100 dated 23 January 1874.

Copy of Estimate Ealing

Rs. 24 Ans. 12
Sanction Rs. 24 Ans. 12
G.O. 950/74.
Dated 21-

Work. Alterations & additions to the Ealing Catalogue at Pollachy

Rupees 360

22nd Sept. 1870

Estimate for Improving Civil Buildings recommended for the sanction of the Supt. Engr.

Number	Taluq	Quantity	Description of work.	Price	Rate	Amount	Valuation of Building	Date & cost of last repairs: Date	Date & cost of last repairs: cost	Explanation of the necessity of work &c	Suggestions recommended
			Alterations & additions to the Taluq Cutchery at Pollachy.								
			Record Room.								
12			Converting mention windows into glazed ones	@ 10		120 - -	✓				
			Treasury.								
2			Iron grated doors converted into fixed iron gratings	18		36 - -	✓				
1			Do removed & refixed with iron bars clover	20		20 - -	✓				
1			Fixed iron grating removed & refixed with iron bars clover	18		18 - -	✓				
			Wards. "								
4			Iron grated doors removed & refixed with iron bars clover	20		80 - -	✓				
2			Fixed iron gratings Do.	Do.	18	36 - -	✓				
			Open space between Treasury & Cashiers room								
		3⅓	Rgdr. of Brick in chunam with plastering	@ 7		23 5 4	333 5 4	✓			
							16 10 8	✓			
						Total Estimate Rupees	350 - -	✓			
						Deduct for old materials	10 - -				
						Total Estimate Rupees	340 - -	✓			

25000

Not required

Checked M.

Alterations

Collector.

Colonel R.E.
Superintending Engineer

Range Officer

No. 100.

Superintending Engineer's Office
Coimbatore, Nov. 2nd, 1874.

From

The Superintending Engineer
Coimbatore.

To

The Secretary to Government, F.W.
Madras.

Enclosures.
3 Estimates.

Sir,

With reference to G.O. No 1209 of 13th May 1874, I have the honor to forward, for sanction and provision of funds, the undermentioned Estimates which have been approved of and countersigned by the Collector.—

1 Alterations and additions to the Taluq Cutcherry at Pullachy Rs. 340
2 —Do— do—to—do—at Oodamulpilla " 340
3 —Do— do—to—do—at Erode " 350
1,030

2. In the estimate for improving the Erode Cutcherry, you will observe, provision is made for 2 Pinkahs which the Collector considers necessary as Erode is a very hot station.—

I

From the Superintending Engineer Coimbatore, dated 2nd Nov. 1874, No. 100, forwarding 3 Estimates.

P.W.D. 24 Nov 74
Ln. 13. No. 408.

P.W.G. 30/74
No. 205

Work. Alterations & additions to the Taluq Cutchery at Pullachy—

Work. Alterations & additions to the Taluq Cutchery at Oodamulpilla—

Work. Alterations & additions to the Taluq Cutchery at Erode—

Rupees 1030

Ln a letter from the Supdg Engineer Coimbatore to the Secretary to Govt PWD Fort St George, dated 2nd Novr 1874.

Pullachy Estimate

I have the honor to be,
Sir,
Your most obedt Servt
Executive Colonel R.E.
Superintending Engineer
Coimbatore.

Copy to Govt Public Works Dept

Copy to the Secretary to Govt Public Works Dept

Memorandum

Dated 2nd & Received 5th Novr 1874

No. 3776 dated 18th Novr 1874 Superintending Engineer Coimbatore

Forwards, for sanction, Estimates for additions & alterations to Collectorate Cutcherry Dharapooram, Cutcherry at Erode, Police Quarters at Erode, Amount Rs 340, Rs 340 & Rs 350 respectively

To

The Secretary to Government
Public Works Department
Madras

Sir,

I have the honor to be,
Sir,
Your most obedt Servt
Executive Colonel R.E.
Superintending Engineer
Coimbatore.

Copy

6930

Govt. of {1874} Madras.

PUBLIC WORKS.

To Mudeey. Dpmt. of Irrign
Supg: Engr. Cuddapah

Dated

Recd. Encl. 3

G. O., 26th Nov. 1874, No. 2311

Nos. 408-409

Valuing Cutcherries at Pallachy, Codamulputta & Errode Coumbalore &c.

Estimates for certain alterations to the Cutcherries sanctioned; the work ordered to be carried out by transfer from Repair funds if available, and the question provision of ~~fund~~ punkah Errode to be considered Revenue Deptt —

408-409.

Cir 12/11/74