M.R.O. 14—18,000—27-6-24

MADRAS RECORD OFFICE.

Government of Madras.

Revenue **DEPARTMENT.**

G.O. No. 110 — Press Mis.

217-218

Dated 14 — 1 — 1867.

Not to be folded or roughly handled

No. 217. Read the following letter from the Superintending Engineer, 4th Division, to the Secretary to Government, Public Works Department, dated Madras, 5th January 1867, No. 3,908:—

1 Plan.
1 Estimate (Abstract).

1. I have the honor to transmit, for the sanction of Government, a plan and an estimate, amounting to Rupees 1,100, for certain improvements to the Talook Cutcherry at Wandiwash, in the North Arcot District, consisting of raising partition walls, making lock-ups and a Talsildar's room, erecting a shed for the Curnums, and re-arranging a few doors and windows.

2. The project was taken in hand at the request of the Collector of North Arcot, who has approved of the general arrangement exhibited in the plan.

3. From recent inspection I am in a position to concur with the Revenue Department in considering the proposed alterations very desirable, and permission is solicited to make an application for the necessary funds after the 1st April 1867.

Referred to the Revenue Department.

(Signed) CHARLES A. ORR, Colonel, R. E.,
Secretary to Government.

8th January 1867.

No. 218. ORDER THEREON, 14th January 1867, No. 110.

Miscellaneous.

The Collector is requested to explain to what purposes the additional space is to be applied, and the average number of persons, male and female, daily confined in the lock-ups of the Cutcherry.

(True Extract.)


(Signed) J. D. SIM,
Secretary to Government.

To the Collector of North Arcot.
„ the Public Works Department.
„ the Board of Revenue.


Erd. S. T. Augustin.

Estimate Rupees (1800—)
Nature of Soil clay
Description of proposed foundation
½ Brick in Mortar

Plan and Section
of
Wandawash Taluq Cutchery

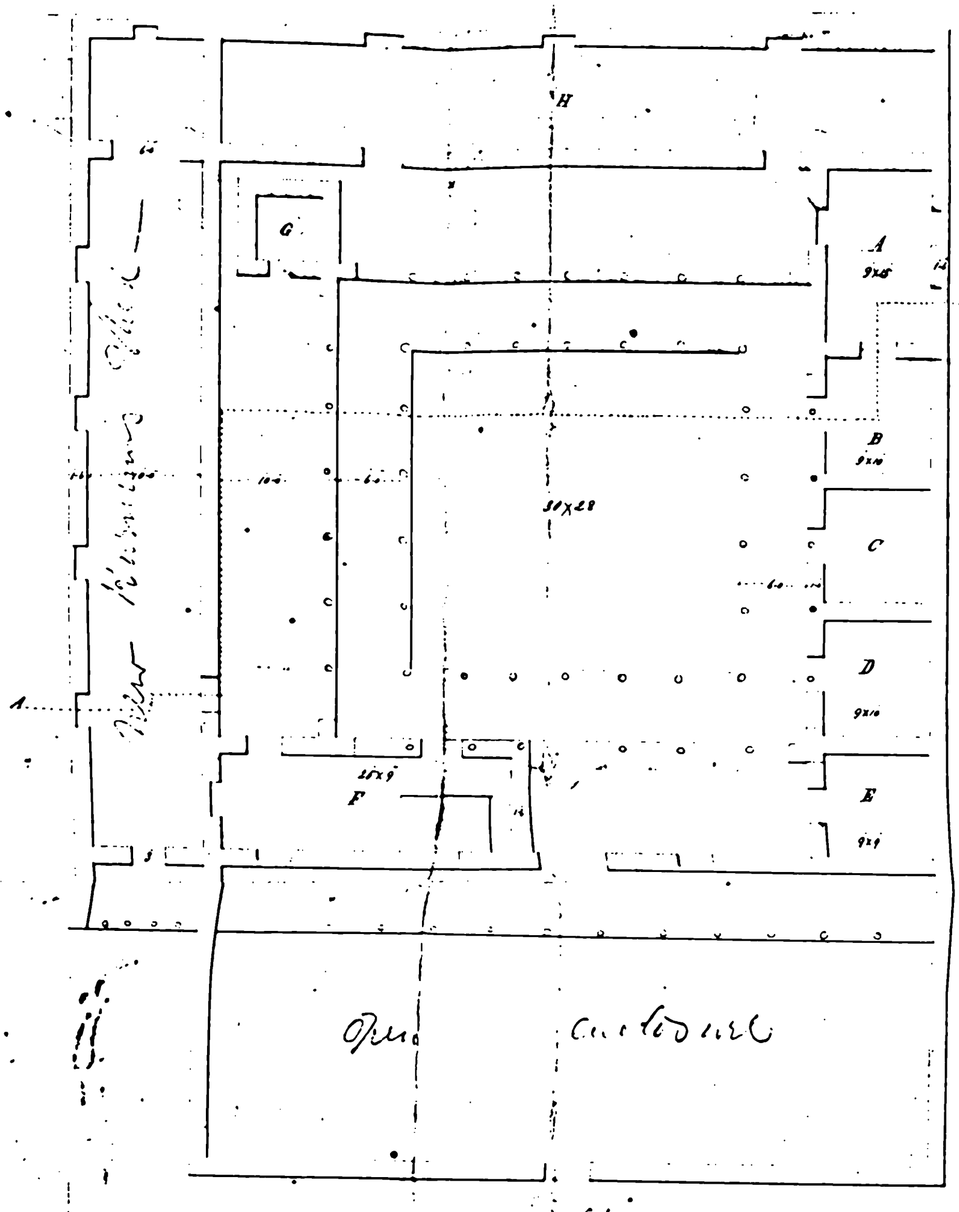

Section thro' A.B

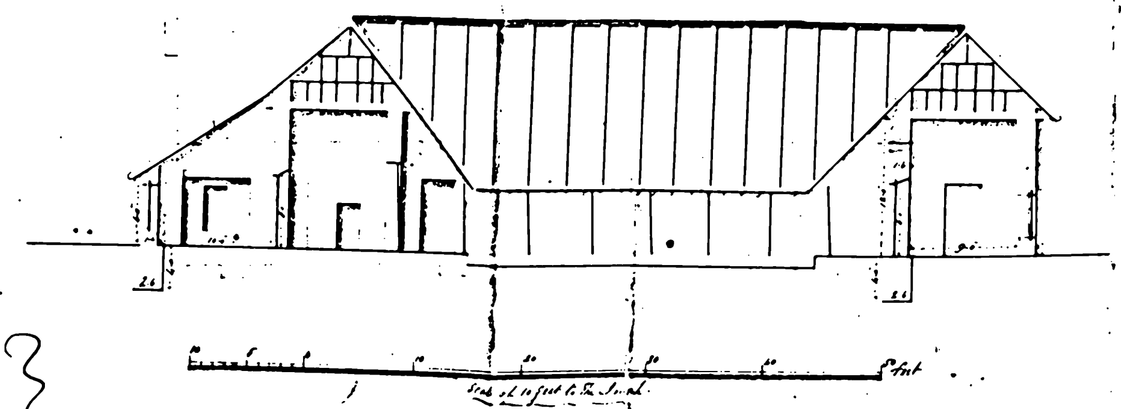

References

A.... Police Station
B Room for Remanded male prisoners
C..... do..... do..... female..... do.....
D..... do Convicted male prisoners.....
E..... do..... do..... female..... do.....
F Tahsildar Cutchery.....
G Guard Room.....
H Record Room.....

North Arcot District
Police Range Office
Arnee November 1866

By [illegible]
S.P.O.

[illegible]
Sub Engineer Police Range

Abstract

Improving the Wandewash Talug Katchery.

Quantities	Description of Charges	Rate	Per	Amount	Total
1788 2/4	Cubic feet of Brick in Mortar @	" 1	Cft	195 9 10	
218 3/4	Sqrs of Plastering @	" 2	" Sqr	27 4 8	
8	Iron folders & strong Ridge do complete	20 "	each	160 " "	
9	Windows with frames & Iron bars &c	10 "	"	90 " "	
	Removing one Door & window framing &c			5 " "	
	Removing & Wooden Pillars with Beams &c			5 " "	
2364 3/4	Cubic feet of Brick in Mortar @	" 2	" Cft	295 9 6	
12 30/100	Squares of Roofing @	15 "	" Sqr	184 8 "	
1	Door with frames Complete @	10 "	each	10 " "	
5	Windows Do. Do. @	5 "	"	25 " "	
1	Beam @	1 8	"	1 8 "	
	Window Do @				
	Sundries and Unseen Items			96 8 "	
	Total Estimate Rupees				1150 " "

C. J. Bruce
15th December 1866

C. S. Stevenson
Asst Engineer 1st Class

Approved
Capt R.E.
Supt Buildings & Roads