M.R.O. 1—20,002—12-8-65.

(1) Number of Pages 10

(2) Date of repair 14-6-68

(3) Initials of the Referencer 23.1.68

MADRAS RECORD OFFICE

GOVERNMENT OF MADRAS

Revenue DEPARTMENT

G.O. No. 790 Press—
B.P. No.— Mis.

Dated 19-4-1825 -196—.

Not to be folded or roughly handled

D. P. W

Salem District Salem Range Salem Taluq

Detailed Estimate No 14 of 1874-75.

Estimate for Constructing a Compound wall for Native Burial Ground at Yercaud.

Particulars of work.	Measurement Length	Breadth	Height	Contents
Compound wall all round deducting Gateway	946	2	3	5676
Total Cft of Roughstone in Mud.				5676
Or Cubic yard.				210 2/9

Abstract

Quantity	Description of work.	Per	Rate	Amount	Total
210 2/9	Cubic Yards of Roughstone in Mud. Cy	-	12 -	157	108
1	Wooden Gate Shutters (4×6) with wooden posts & iron fitting complete.	Each	12 - -	12	- -
	Total			169	108
	Rundrics at 5 per Cent			8	54
	Total Estimate Rupees			178	- -


Salem Range Office
4th February - 1875

G. J. Turner
Assistant Engineer


C. J. Lumsden
Collector of Salem


J. W. Mantle Major R.E.
District Engineer

79°/3

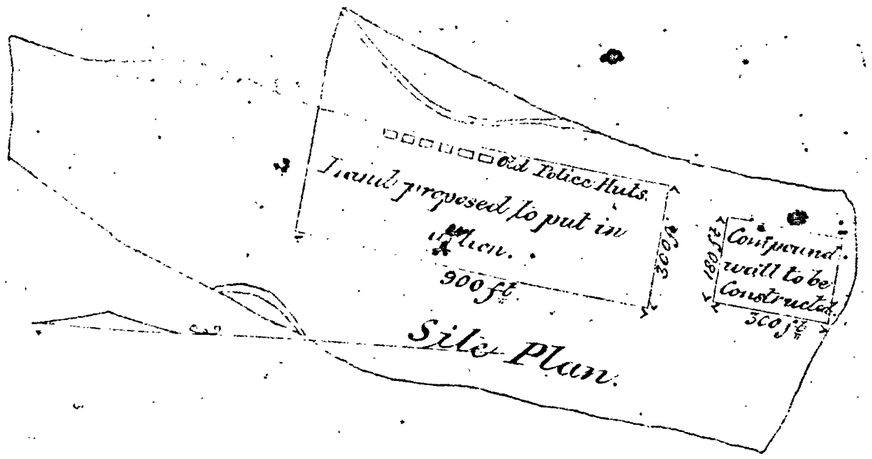

Plan of a Compound wall of the Native burial ground proposed to be built at Yerkaud.

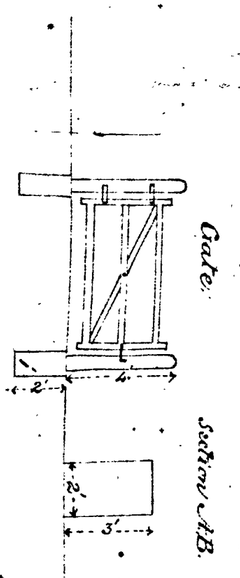

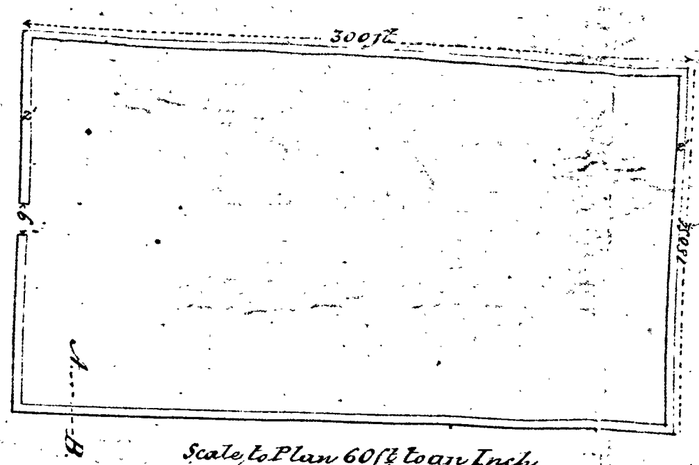

Scale to Plan 60 ft to an Inch.
Scale to Sections 5 ft to an Inch.

Nature of Soil. Stone & Gravel.
Do — foundation: do —
Amount of Estimate Rs. 178—
Salem Range Office.
1st February 1875.

G. J. Turner.
Assistant Engineer.

T. Wheeler Major R.E
District Engineer

C. J. Lindsay
Collector of Salem

Salem District
Salem Range
Salem Taluq

Register No. to be taken
Estimate Expenditure
Rs. 178 — Rupees

Por 1987/75
Ex Public Works

Estimate for Constructing a Compound wall &c for Native Burial Ground at Yerkaud
Estimated at Rupees 178.

Revenue Department

2nd/4

Miscellaneous No. 3029

Proceedings of the Board of Revenue
Dated 15th April 1875
Read the following:—

No. 80

From

The Collector of
Salem

To

The Secretary to the
Board of Revenue
Madras

Sir,

I have the honor to forward the enclosed Plan and Estimate amounting to Rupees 178 for constructing a compound wall for a native Burial ground at Gereaud on the Shevaroy Hills and to request

2
Rev 1381/75
Enclosure 1965/
1 Estimate

request that the necessary
sanction of Government
may be obtained for
the same.

The Collector's Office
Camp Belle Vue Kiriehi
Namakal Taluq
20th March 1875

Thanavelu
Hig[h]d[er] T. V. Longley
Collector

Submitted for the
orders of Government.

True Copy & Extract

H Elton
Ag Secretary

To
The Secretary to
Government Revenue
Department
with Plan & Estimate
to be returned.

[illegible]
Collr & Dist Mgt

No 1381
Revenue 1875 Depte
Proceedings of the
Board of Revenue

Dated 15th April 1875
Desp 15
Rec'd 16
ans 2 Dec

V G.O. Ed Dept 14 July 1875 No 183

Submitting for
orders of Govt letter
from Collector of
Salem forwarding
plan & estimate
for constructing
a compound
wall for the Native
Burial ground
at Yercaud
with Shevaroy
Hills.

With Order
No 790 - 19 April 1875

No 790

No explanation is
given in the forgoing papers
as to the necessity for the
work therein proposed. The
requisite should be supplied.

19 April 1875

To the Board of Rev dated 23 April