M.R.O. 1—20,002—12-8-65.

(1) Number of Pages 10

(2) Date of repair 14-6-68

(3) Initials of the Referencer 23.1.69

MADRAS RECORD OFFICE

GOVERNMENT OF MADRAS

Revenue DEPARTMENT

G.O. No. 790 Press —
B.P. No. — Mis.

Dated 19-4-1875 196— .

Not to be folded or roughly handled

D. P. W.

Salem District Salem Range Salem Taluq

Detailed Estimate No. 14 of 1874-75.

Estimate for Constructing a Compound wall for Native Burial Ground at Yercaud.

Particulars of work.	Measurements: Length	Breadth	Depth	Contents
Compound wall all round deducting Gate way	946	2	3	5676
Total Cft of Roughstone in Mud.				5676
Or Cubic yard.				210 2/9

Abstract

Quantity	Description of work.	Per	Rate	Amount	Total.
210 2/9	Cubic Yards of Roughstone in Mud.	Cy	" 12 "	157	108
1	Wooden Gate shutters (4×6) with wooden posts & iron fitting complete	each	12 " "	12	" "
	Total			169	108
	Sundries at 5 per Cent			8	54
	Total Estimate Rupees				178 " "

Salem Range Office
4th February 1875

G. J. Turner
Assistant Engineer

C. J. Lewellyn
Collector of Salem

J. W. Mullen Major R.E.
District Engineer

Salem District
Salem Range
Salem Taluq

Rejected in the Collector's Office on the 22nd Nov 1875

Dec 1884/75

Estimate 1985/75


10/4/75-190

Estimate for Constructing a Compound wall &c for Native Burial Ground at Yercaud.
Estimate Rs 178.

790/3



Plan of a Compound wall of the Native burial ground proposed to be built at Yerkaud.

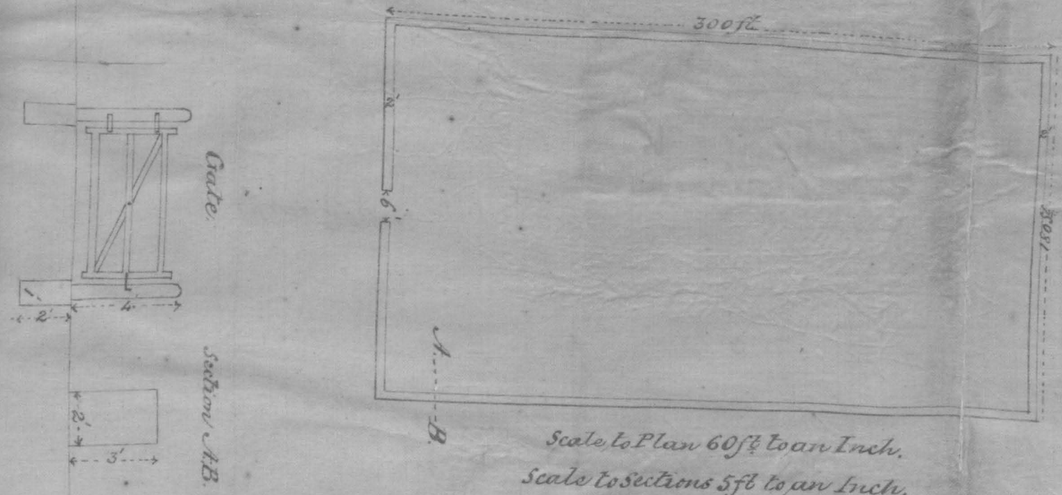

Scale to Plan 60 ft to an Inch.
Scale to Sections 5 ft to an Inch.

Nature of Soil. Stone & Gravel.
Do — foundation. do
Amount of Estimate Rs. 178-
Salem Range Office.
6th February 1875.

G. J. Turner.
Assistant Engineer.

C. J. Lovejoy
Collector of Salem

J. Whitelaw Major R.E.
District Engineer

Revenue Department

790/K

Miscellaneous No. 3029

Proceedings of the Board of Revenue

Dated 15th April 1875

Read the following:—

No. 80

From

The Collector of
Salem

To The Secretary to the
Board of Revenue
Madras

Sir,

I have the honor to forward the enclosed Plan and Estimate amounting to Rupees 178 for constructing a compound wall for a native Burial ground at Gureaud on the Shevaroy Hills and to request

2
Rev 1381/75
Judl 1968/

request that the necessary
sanction of Government
may be obtained for
the same.

I have &c
C. T. Longley
Collector

Collector's
Office
Camp Belle Kurichi
Nanakal Taluq
20th March 1875

Submitted for the
orders of Government.

True Copy & Extract

H Elton
Ag Secretary

To
The Secretary to
Government Revenue
Department
with Plan & Estimate
to be returned.

For Collector

No 1381
Revenue 1875 Depte
Proceedings of the
Board of Revenue

Dated 15th April 1875
Desp 5
Rec'd 16
Ans'd

Submitting for orders of Govt letter from Collector of Salem forwarding plan & estimate for constructing a compound wall for the Native Burial ground at Yercaud on the Shevaroy Hills.

With Order
No 790 - 19th April 1875

No 790

No explanation is given in the foregoing papers as to the necessity for the work therein proposed. The nuspin should be supplied.

19 April 1875

To Board of Rev dd 23 April.

V G.O. Ext Sept 14 July 7 to 183